

NC1V




IDEC's original Spring-up Terminals and Cover.
Provide IP20 Finger-safe Protection.



- Note: TÜV, CE, and CCC marks are applicable for series trip type only.
- See website for details on approvals and standards.

Finger-safe, spring-up terminal reduces wiring time.

Ring terminal tabs can be installed easily, and screws are held captive.



Main Circuit Terminals are Fingersafe (IP20)

Spring-up, fingersafe structure requires no terminal cover.



Auxiliary/Alarm Contact Terminals are Equipped with a Terminal Cover

Voltage coil terminals on the relay trip version are also equipped with a terminal cover as standard.



Retractable Actuator

The actuator is retracted while the circuit protector is turned on. Inadvertent operation, due to touching the actuator, can be prevented.

Rated Short-circuit Capacity 2500A

Available with Inertial Delay

Allows for use with large inrush currents such as motors

Safe Trip-free Mechanism

The circuit remains open even when the operator is turned on after tripping (unit must be manually reset after removing the cause of the tripping).

Padlock Attachment

Locks the retractable actuator in the off position to prevent NC1V from being switched on inadvertently.



NC1V Circuit Protectors

IDEC's original spring-up, fingersafe terminals enhance reliability and safety.

Specifications

Shape				
Part No.		NC1V		
Operator Style		Retractable actuator		
Internal Circuit		Series trip (current trip), Relay trip (voltage trip)		
Protection Method		Hydraulic magnetic tripping system, Magnetic tripping system (voltage trip)		
No. of Poles		1-pole	2-pole	3-pole
Rated Voltage (AC/DC) (*1)		250V AC 50/60Hz, 65V DC	250V AC 50/60Hz, 125V DC	250V AC, 50/60Hz
Series Trip (Current Trip)	Rated Short-circuit Capacity	250V AC, 2500A 65V DC, 2500A	250V AC, 2500A 125V DC, 2500A	250V AC, 2500A
	Rated Current	0.1A, 0.3A, 0.5A, 1A, 2A, 3A, 5A, 7A, 10A, 15A, 20A, 25A, 30A		
	Trip Characteristics (*2)	Time delay curve curve M (slow), curve A (medium), S (instantaneous) Curves M and A are available with inertial delay.		
Relay Trip (Voltage Trip) (*3)	Rated Current	30A		
	Trip Voltage	24 to 48V DC (at 25°C) Voltage application duration 10 sec maximum, tripping time 0.1 sec maximum (at rated voltage)		
Auxiliary Contact/Alarm Contact	Contact Rating	125V AC 3A (resistive load), 30V DC 2A (resistive load)		
	Minimum Applicable Load	24V DC 1mA (resistive load, reference value)		
Insulation Resistance		100 MΩ minimum (500V DC megger)		
Dielectric Strength		2000V AC, 1 minute (between terminals when main contacts are open, between live parts of different poles, between live and dead parts) 600V AC (between terminals when auxiliary circuits are open)		
Vibration Resistance (with rated current applied)		Damage limits: 147 m/s ² (10 to 55 Hz) (1-pole, 2-pole), 78 m/s ² (3-pole) Operating extremes: 98 m/s ² (1-pole, 2-pole), 78 m/s ² (3-pole)		
Shock Resistance (S time delay curve: 80% rated current, A, M time delay curve: 100% rated current)		Damage limits: 490 m/s ² (1-pole, 2-pole), 297 m/s ² (3-pole) Operating extremes: 196 m/s ²		
Electrical Life		10,000 cycles minimum (at rated current), 10 operations per minute		
Reference Temperature		40°C		
Operating Temperature		-10 to +60°C (no freezing) Rated current is based on an ambient temperature of 40°C. When the operating temperature exceeds 40°C, derate the rated current by using the factors shown below.		
Storage Temperature		-40 to +60°C (no freezing)		
Operating Humidity		45 to 85% RH (no condensation)		
Storage Humidity		45 to 85% RH (no condensation)		
Terminal Style	Main Circuit Terminal	Spring-up, fingersafe terminal: M4 screw (up to 20A), M5 screw (25A and 30A)		
	Auxiliary/Alarm Contacts, Voltage Coil Terminal	M3.5 screw		
Weight (approx.)		1-pole: 90g, 2-pole: 170g, 3-pole: 260g		

*1) 3-pole type is for AC voltage only.

*2) For S (instantaneous) tripping curve, humming sound may be caused when used in an AC sinusoidal-wave current circuit around 80% of the rated current, however, the performance of the circuit protector will not be affected.
To avoid unnecessary tripping, do not use in circuits where inrush currents may be present.

*3) Relay trip (voltage trip) type is not equipped with an overcurrent trip function.

• Do not use the NC1V circuit protectors in environments where they are exposed to extreme temperature, humidity, dust, corrosive gases, vibration, shock, or in a circuit where inrush current may be present, otherwise unnecessary operations and damage may occur.


Operating Temp.	Derating Factor
50°C	0.9
55°C	0.8
60°C	0.7



Download catalogs and CAD from <http://eu.idec.com/downloads>

NC1V Circuit Protectors

Part No. Development

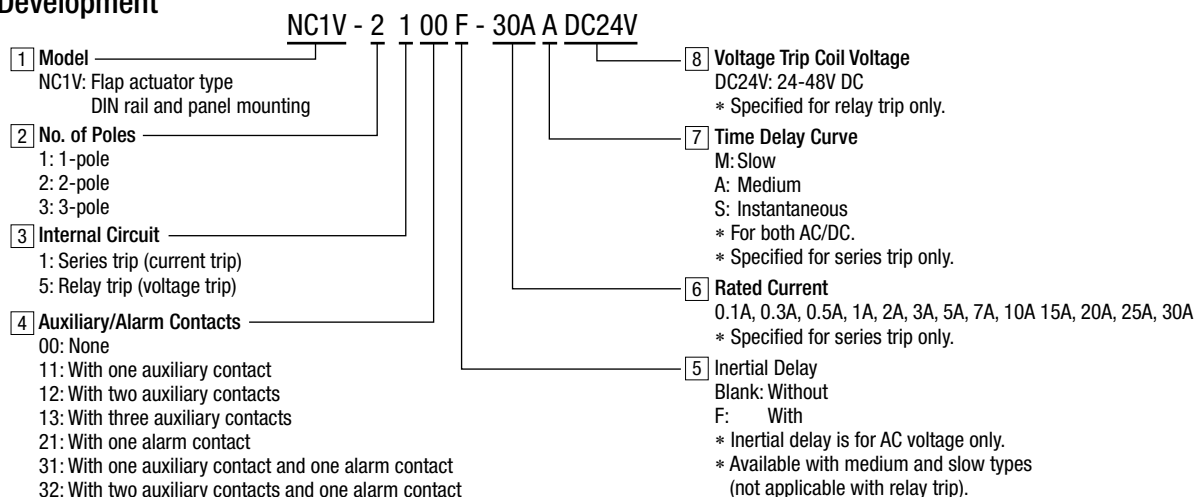

• Specify rated current, time delay curve, or voltage trip coil voltage in place of [6][7][8] in the Part No.

Internal Circuit	No. of Poles	Inertial Delay	Auxiliary Contact Alarm Contact	Part No.	Code					
					[6] Rated Current	[7] Time Delay Curve	[8] Voltage Trip Coil Voltage			
Series Trip (Current Trip)	1-pole	—	—	NC1V-1100-[6][7]	0.1A 0.3A 0.5A 1A 2A 3A 5A 7A 10A 15A 20A 25A 30A	M (slow) A (medium) S (instantaneous)	—			
			One Auxiliary Contact	NC1V-1111-[6][7]						
			One Alarm Contact	NC1V-1121-[6][7]						
		With	—	NC1V-1100F-[6][7]						
			One Auxiliary Contact	NC1V-1111F-[6][7]						
			One Alarm Contact	NC1V-1121F-[6][7]						
	2-pole	—	—	NC1V-2100-[6][7]						
			One Auxiliary Contact	NC1V-2111-[6][7]						
			Two Auxiliary Contacts	NC1V-2112-[6][7]						
			One Alarm Contact	NC1V-2121-[6][7]						
			One Auxiliary Contact and One Alarm Contact	NC1V-2131-[6][7]						
		With	—	NC1V-2100F-[6][7]						
			One Auxiliary Contact	NC1V-2111F-[6][7]						
			Two Auxiliary Contacts	NC1V-2112F-[6][7]						
			One Alarm Contact	NC1V-2121F-[6][7]						
			One Auxiliary Contact and One Alarm Contact	NC1V-2131F-[6][7]						
		3-pole	—	—				NC1V-3100-[6][7]		
				One Auxiliary Contact				NC1V-3111-[6][7]		
				Two Auxiliary Contacts				NC1V-3112-[6][7]		
				Three Auxiliary Contacts				NC1V-3113-[6][7]		
	One Alarm Contact			NC1V-3121-[6][7]						
	With		One Auxiliary Contact and One Alarm Contact	NC1V-3131-[6][7]						
			Two Auxiliary Contacts and One Alarm Contact	NC1V-3132-[6][7]						
			—	NC1V-3100F-[6][7]						
			One Auxiliary Contact	NC1V-3111F-[6][7]						
			Two Auxiliary Contacts	NC1V-3112F-[6][7]						
	Relay Trip (Voltage Trip)	1-pole	—	—				NC1V-1500-[8]	—	24V DC
		2-pole		NC1V-2500-[8]						
		3-pole		NC1V-3500-[8]						

Note: Inertial delay is for AC circuit. Also, time delay curve of S (instantaneous) is not available with inertial delay.

Internal Circuit

1-pole

NC1V-1100 (Without auxiliary/alarm contacts)	NC1V-1111 (With auxiliary contact)	NC1V-1121 (With alarm contact)	NC1V-1500 (Relay Trip)

2-pole

NC1V-2100 (Without auxiliary/alarm contacts)	NC1V-2111 (With auxiliary contact)	NC1V-2121 (With alarm contact)	NC1V-2500 (Relay Trip)

3-pole

NC1V-3100 (Without auxiliary/alarm contacts)	NC1V-3111 (With auxiliary contact)	NC1V-3121 (With alarm contact)	NC1V-3500 (Relay Trip)

Overcurrent-Time Delay Characteristics (sec at 40°C) [vertical mounting]

Item	Time Delay Curve	Percent of Rated Current								
		100%	125%	150%	175%	200%	400%	600%	800%	1000%
AC (50/60 Hz)/DC	S (instantaneous)	NO TRIP	—	*0.005 to 0.1	0.003 to 0.06	0.0027 to 0.05	0.002 to 0.03	0.002 to 0.028	0.002 to 0.025	0.002 to 0.022
	A (medium)	NO TRIP	*25 to 240	16 to 140	—	6 to 32	0.4 to 4	0.0055 to 1.5	0.004 to 0.8	0.004 to 0.65
	M (slow)	NO TRIP	*60 to 600	30 to 200	—	9 to 60	0.4 to 10	0.006 to 4.5	0.004 to 1.8	0.004 to 0.8
AC (50/60 Hz)	With Inertial Delay A (medium)	NO TRIP	25 to 240	—	—	6 to 32	0.8 to 6	0.09 to 3.5	0.02 to 1.8	0.01 to 1.0
	With Inertial Delay M (slow)	NO TRIP	60 to 600	—	—	10 to 60	0.8 to 10	0.06 to 4.5	0.02 to 3	0.01 to 1.75

*: May trip on DC.

Download catalogs and CAD from <http://eu.idec.com/downloads>

APEM

Switches & Pilot Lights

Control Boxes

Emergency Stop Switches

Enabling Switches

Safety Products

Explosion Proof

Terminal Blocks

Relays & Sockets

Circuit Protectors

Power Supplies

LED Illumination

Controllers




Operator Interfaces

Sensors



AUTO-ID

NC1V

Time Delay Curves at 40°C

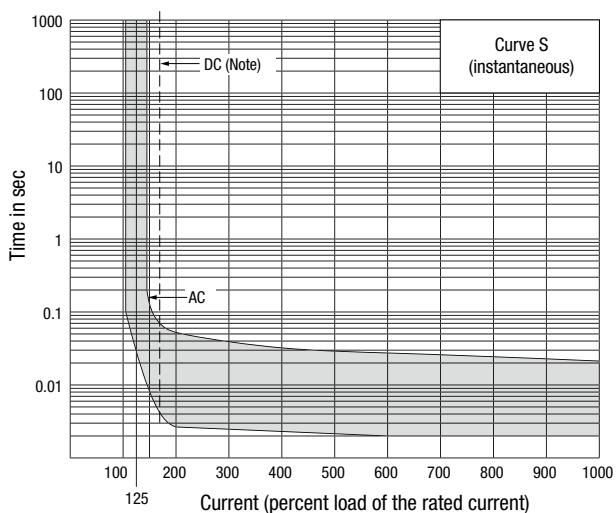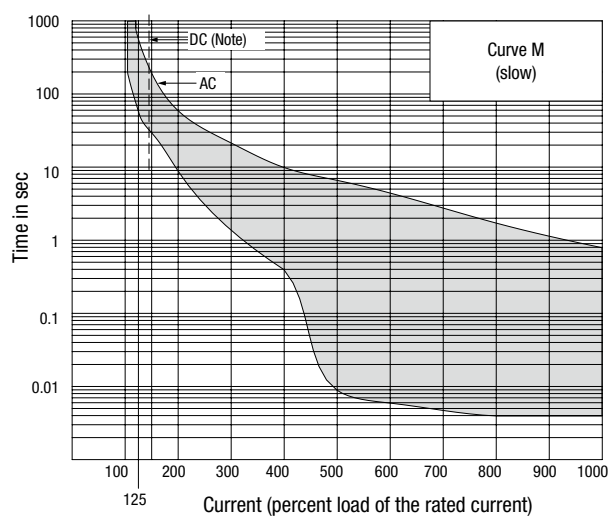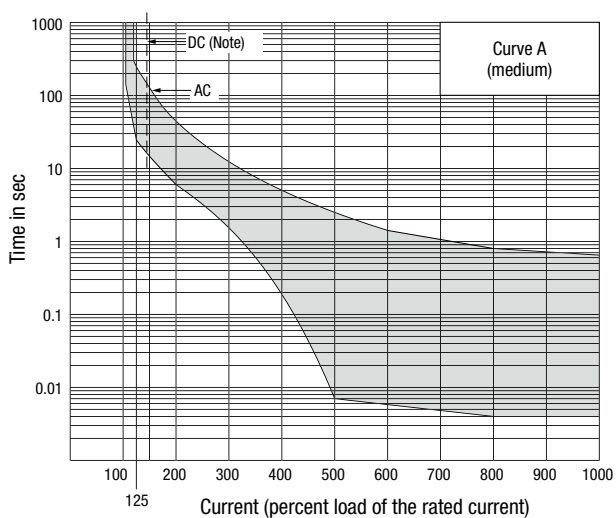

Note: The entire shaded area applies to AC.
For DC, the shaded area on the right of the dashed line applies.

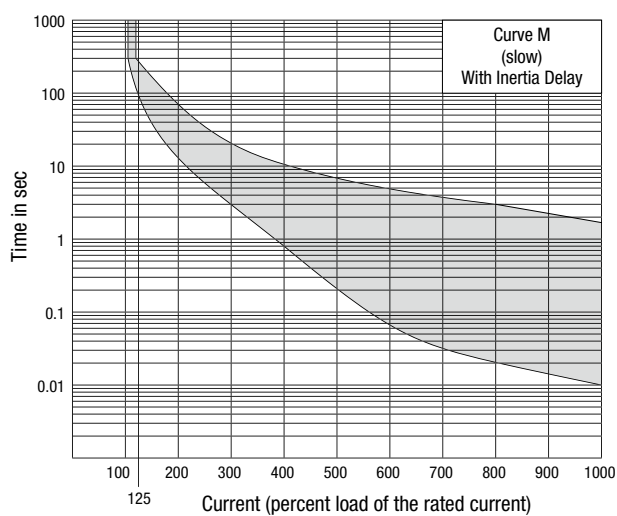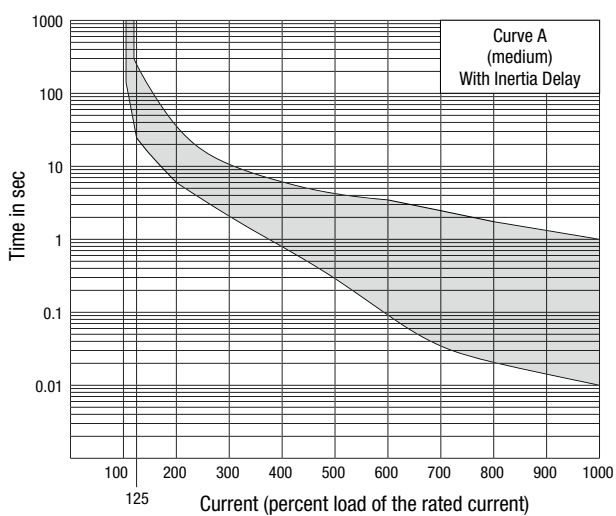


Time Delay Curve and Ambient Temperature

NC1V circuit protectors employ an electromagnetic tripping system, where the rated current (trip current) is not affected by ambient temperatures. But the time delay may vary with the oil viscosity in the oil dash pot. Lower oil viscosity at higher temperatures results in a shorter delay, whereas at lower temperatures the delay will be longer.

Temperature Correction Curve

The time delay curves on the preceding page are measured at 40°C. With reference to the following curves, time delays can be corrected according to ambient temperature.

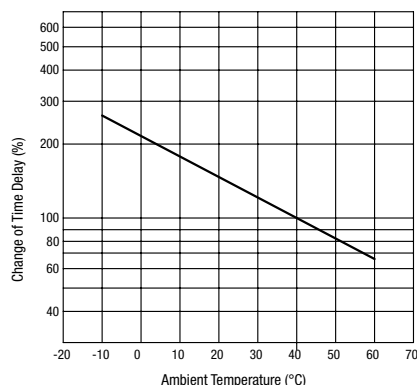


The time delay is based on an ambient temperature of 40°C. Time delays at other temperatures are corrected according to the temperature correction curve. The time delay of the instantaneous time delay curve (S) is not affected by the ambient temperature.

When operating temperature exceeds 40°C, derate the rated current by multiplying the derating factor shown on the right.

Operating Temp.	Derating Factor
50°C	0.9
55°C	0.8
60°C	0.7

Inertial Delay

Inertial delay is designed not to trip on a non-repeating single pulse of 20 times the rated current (peak value) for a duration of 8 ms. In addition, circuit protectors equipped with inertial delay do not respond to high inrush currents caused by transformer or lamp loads, but perform the specified interruption on the subsequent overcurrents. Inertial delay is available on AC circuits, and is not available with the series trip curve S (instantaneous).

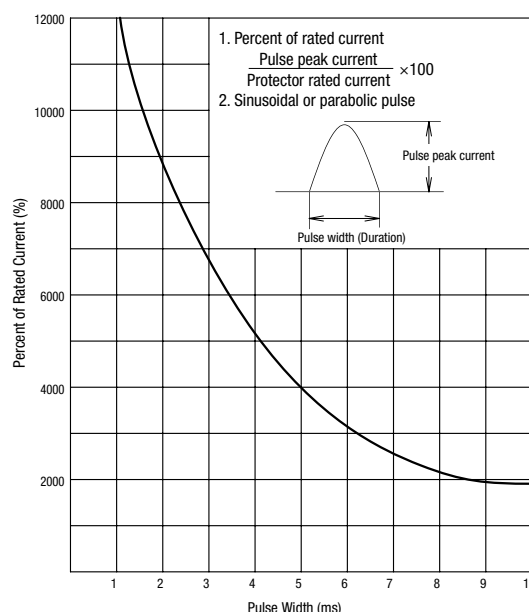

Impedance and Coil Resistance

Series Trip (Current Trip) (initial value)

at 25°C

Rated Current	For AC 50/60 Hz Impedance (Ω)		For DC Resistance (Ω)	
	Curve S	Curves A, M	Curve S	Curves A, M
0.1A	66.0	116.0	43.0	106.0
0.3A	6.6	11.0	4.1	10.0
0.5A	1.92	3.65	0.86	3.40
1A	0.50	0.93	0.25	0.90
2A	0.16	0.27	0.11	0.25
3A	0.07	0.12	0.050	0.11
5A	0.025	0.050	0.015	0.045
7A	0.014	0.027	0.011	0.025
10A	0.007	0.021	0.005	0.020
15A	0.006	0.010	0.005	0.009
20A	0.005	0.006	0.004	0.005
25A	0.004	0.005	0.004	0.005
30A	0.003	0.004	0.003	0.004

Tolerance: ±25% (up to 20A),
 ±50% (25A and 30A)

Relay Trip (Voltage Trip)

at 25°C

Tripping Voltage	For DC Resistance (Ω)
24-48V	100.0

Tolerance: ±25%

Voltage Drop Due to Coil Resistance or Impedance

The internal resistance or impedance of a circuit protector tends to be larger for a smaller rated current. Therefore, when circuit protectors of a small rated current are used, voltage drop should be taken into consideration. Internal resistance also varies with time delay curves, which should also be considered during installation.

Main Contact - Auxiliary/Alarm Contact

[Auxiliary Contact]

Main Contact	NO ontact	NC Contact
ON	closed	open
Tripped	open	closed
OFF	open	closed

[Alarm Contact]

Main Contact	NO ontact	NC Contact
ON	open	closed
Tripped	closed	open
OFF	open	closed







NC1V Circuit Protectors



Dimensions

1-pole

All dimensions in mm.

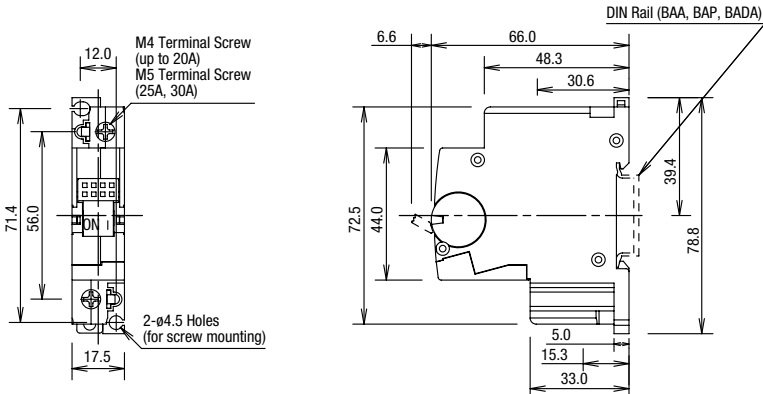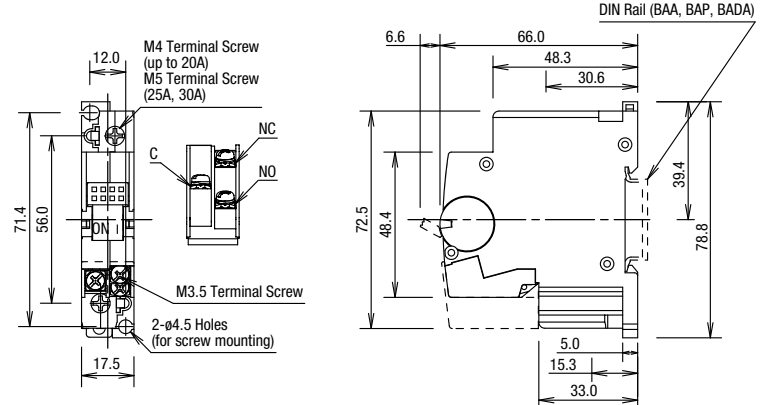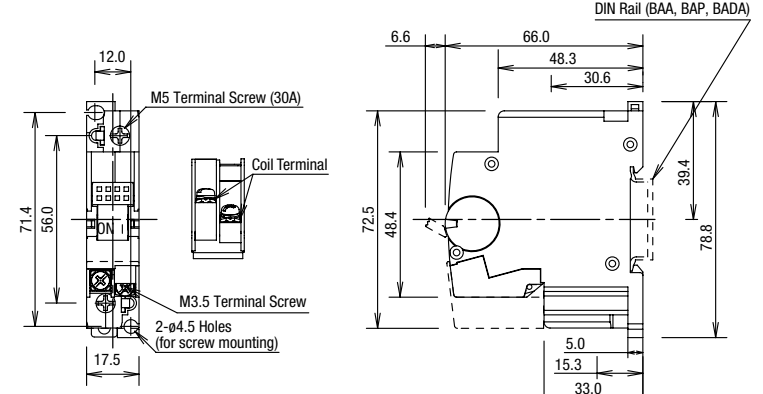NC1V-1100		
NC1V-1111 (Auxiliary Contact) NC1V-1121 (Alarm Contact)		Mounting Hole Layout (M4 Mounting Screws) 
NC1V-1500 (Relay Trip)		

2-pole

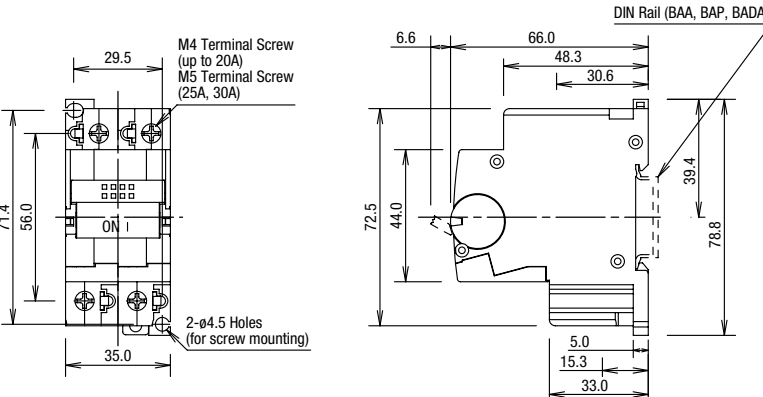NC1V-2100 (without auxiliary/alarm contacts)		Mounting Hole Layout (M4 Mounting Screws) 
---	--	--

2-pole

NC1V-2111 (one auxiliary contact) NC1V-2112 (two auxiliary contacts) NC1V-2121 (one alarm contact) NC1V-2131 (one auxiliary contact and one alarm contact)	The dimensions are for NC1V-2111 and NC1V-2121.	Mounting Hole Layout (M4 Mounting Screws)
NC1V-2500 (Relay Trip)		Mounting Hole Layout (M4 Mounting Screws)

3-pole


NC1V-3100 (without auxiliary/alarm contacts)		Mounting Hole Layout (M4 Mounting Screws)
NC1V-3111 (one auxiliary contact) NC1V-3112 (two auxiliary contacts) NC1V-3113 (three auxiliary contacts) NC1V-3121 (one alarm contact) NC1V-3131 (one auxiliary contact and one alarm contact) NC1V-3132 (two auxiliary contacts and one alarm contact)	The dimensions are for NC1V-3111 and NC1V-3121.	Mounting Hole Layout (M4 Mounting Screws)



NC1V Circuit Protectors

3-pole

All dimensions in mm.

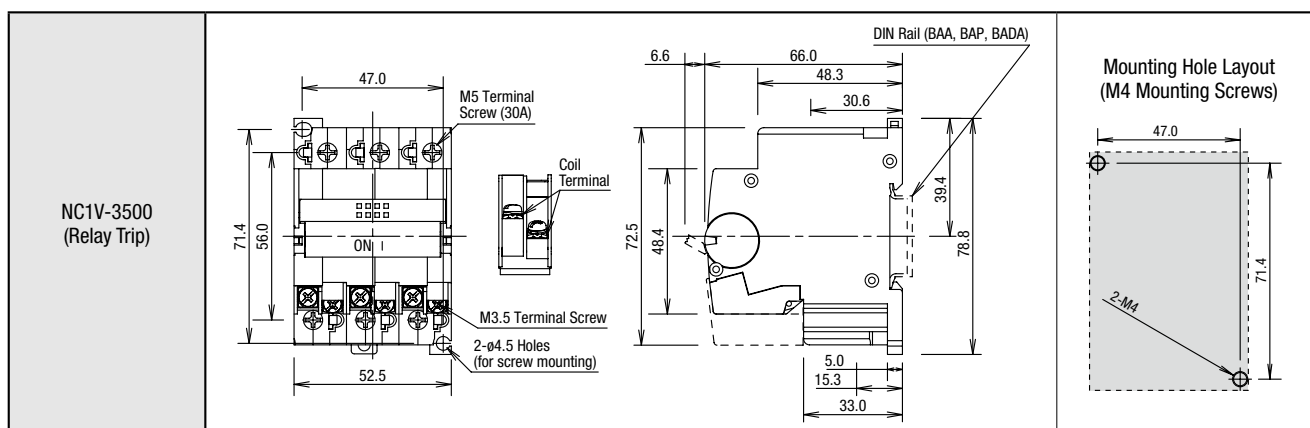

Accessories

All dimensions in mm.

Shape	Material	Part No.	Ordering No.	Package Quantity	Remarks
Panel Mounting Bracket (Note) 	Bracket: Steel Wiring clip: brass (terminal), steel (screw, washer)	NC9Z-MA11	NC9Z-MA11	1	- Used for mounting NC1V circuit protectors in a panel cut-out. - Supplied with two wiring clips for each pole, used for wiring from the rear. - For 1-pole: 2 wiring clips - For 2-pole: 4 wiring clips - For 3-pole: 6 wiring clips
		NC9Z-MA21	NC9Z-MA21		
		NC9Z-MA31	NC9Z-MA31		
Marking Plate 	PBT	NC9Z-PW1	NC9Z-PW1PN10	10	- Available for 2-pole circuit only. For use on 1-pole circuit protectors, break the marking plate into two halves. - Label is supplied by the user.
Padlock Attachment 	Polyamide body with stainless steel pin	NC9Z-LK1	NC9Z-LK1	1	- Locks the retractable actuator in the off position to prevent NC1V from being switched on inadvertently. - Can be used on 1-, 2-, and 3-pole.
DIN Rail (35mm-wide) 	Aluminum	BAA1000	BAA1000PN10	10	- Weight: approx. 200g - See H-071 for details on DIN rail products.
	Steel	BAP1000	BAP1000PN10		- Weight: approx. 320g - See H-071 for details on DIN rail products.
	Aluminum	BADA1000	BADA1000PN10		- Weight: approx. 280g - See H-071 for details on DIN rail products.
End Clip 	Steel (trivalent chromate)	BNL6	BNL6PN10	10	- Applicable rail: BAA, BAP, BADA - Weight: approx. 15g - See H-071 for details on DIN rail products.


Note: Cannot be used with NC1V with auxiliary or alarm contact.

Accessories

Dimensions

All dimensions in mm.


NC9Z-MA Panel Mounting Bracket

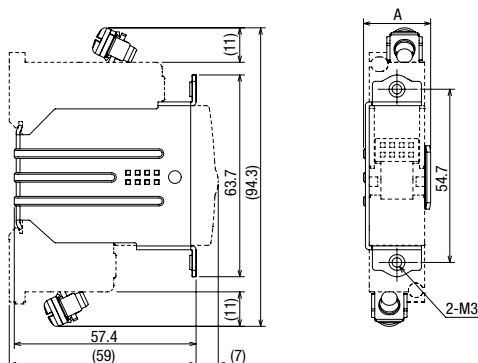


Dimensions A and B

Dimension	A	B
1-pole	21.2	17.8
2-pole	38.7	35.3
3-pole	56.2	52.8

Mounting Hole Layout



NC9Z-TA1 Wiring Clip




Insulation Sleeve

When using wiring clips on 2- or 3-pole circuit protectors, install UL/CSA-rated insulation sleeves on the crimping terminals to ensure the air gap required by UL1077. Applicable Insulation Sleeves (Example)

- Nissei Eco (V-38)
- Tokyo Dip (TP-038)
- Nichifu (TIC38)

Applicable Crimping Terminal



Tightening torque: 1.8 to 2.2 N-m

Materials

- Panel Mounting Bracket: Steel
- Wiring Clip: Brass (terminal strip)
Steel (screw, washer)

Panel Mounting Screw Length (Dimension C in mm)

Applicable Panel Thickness: 0.8 to 3.2 mm


The outside diameter of the M3 screw (including washer) must be 7 mm maximum.

Panel thickness (mm)	0.8	1.0	1.2	1.4	1.6	1.8	2.0	2.3	2.6	3.2
Without washer	5	5	6	6	6	6	6	8	8	8
With plain washer (0.5 thick)	6	6	6	6	6	6	8	8	8	8
With spring washer (0.7 thick)	6	6	6	6	6	8	8	8	8	8
With plain washer (0.5 thick) and spring washer (0.7 thick)	6	6	6	8	8	8	8	8	8	8
Countersunk head screw	—	—	—	—	—	—	6	6	8	8

Tightening torque: 0.5 to 0.8 N-m


The screw length behind the panel must be 9 mm maximum.

NC9Z-PW1 Marking Plate

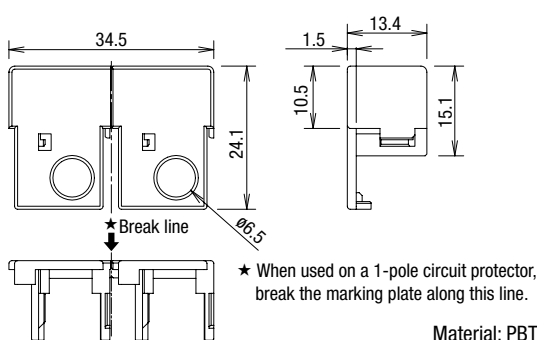


Marking Plate Installed on the Circuit Protector


When installed on a 2-pole circuit protector

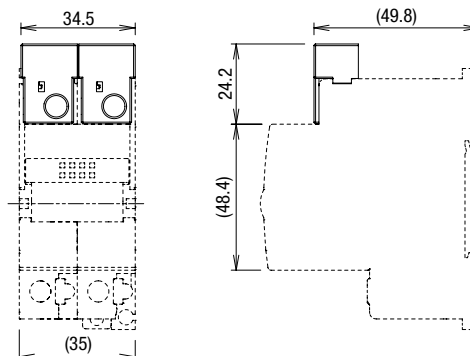

NC98-LK1 Padlock Attachment

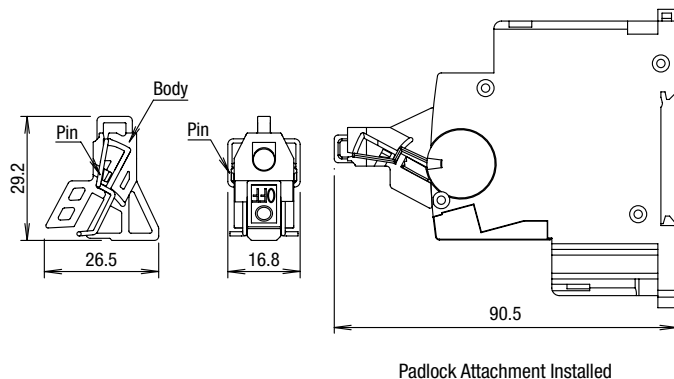

Rail

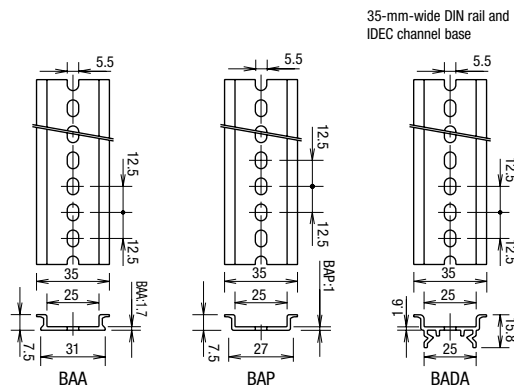Download catalogs and CAD from <http://eu.idec.com/downloads>