

THREAD SEALANTS

LA-CO Makes the Thread Sealant Professionals Depend On.



Slic-tite® is the compound for your threads. Slic-tite


contains PTFE which aids in leak prevention, even with pipe imperfections. As the industry leader, Slic-tite is non-toxic, washes off hands and clothing easily, and is environmentally safe. For an anaerobic pipe thread sealant, use LA-CO LOC®. It contains PTFE for a positive seal, contains no solvents, and will not shrink or weaken the seal. LA-CO LOC is ideal for use on threads in heavy vibration areas such as compressors and reciprocating equipment.

LA-CO also carries a variety of other pipe thread sealants, as well as high-density Slic-tite PTFE thread tape and low-density, contractor-grade PTFE tape.



THREAD SEALANTS

Slic-tite® PASTE WITH PTFE

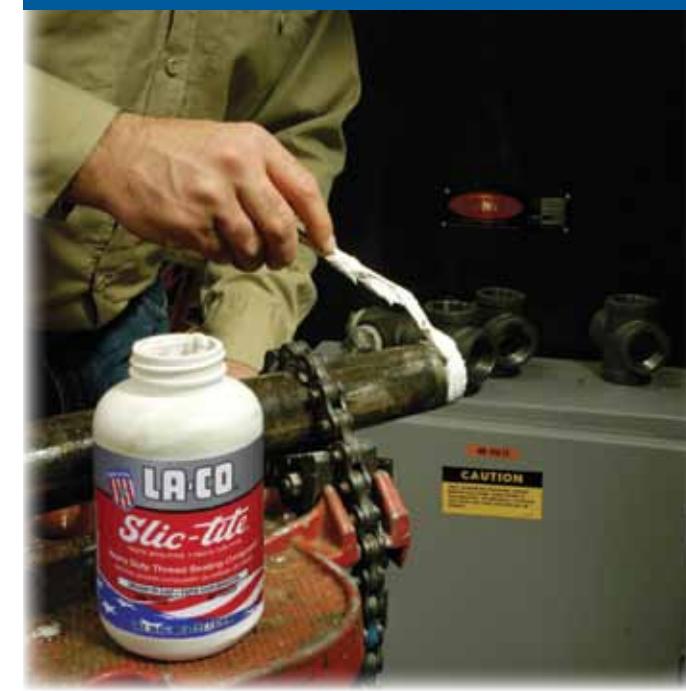

Premium Thread Sealant

- Contains PTFE for greater sealing power
- Use on metal, PVC, CPVC and ABS plastic pipe threads
- For sealing water, air, steam, natural gas, LP gas, refrigerants, ammonia, gasoline, ethanol and oil
- Washes off hands and clothing easily
- Non-toxic, non-drying
- Do not use on oxygen service; use Slic-tite® PTFE thread tape or OXY-TITE® paste
- Sealing temperature: -50°F to 500°F (-46°C to 260°C)
- Pressures: 3,000 PSI (204 BAR) for gas, 10,000 PSI (680 BAR) for liquid
- USDA approved for use in federally inspected meat and poultry plants
- **New** – Noveon approved to be chemically compatible with Flowguard Gold®/Blazemaster® CPVC system
- No V.O.C.'s



PART NO.	SIZE	CASE QTY.
41209	1/4 pt. BIC	12
42009	1/4 pt. BIC	24
41219	1/2 pt. BIC	12
42019	1/2 pt. BIC	24
42012	1 pt.	24
42029	1 pt. BIC	24
42013	1 qt.	12
42049	1 qt. BIC	12
42014	1 gal.	4
42015	5 gal.	1
42069	55 gal.	1
Dozen Display Pack Tubes		
42002	1-1/2 oz.	24

BIC = Brush in Cap



LA-CO LOC®

Anaerobic Pipe Thread Sealant



- Contains PTFE for a positive seal
- Anaerobic adhesive provides locking power
- Contains no solvents, won't shrink and weaken seal
- Seals and locks in the absence of air
- Ideal for threads in heavy vibration areas such as compressors and reciprocating equipment
- Do not use on oxygen service; use Slic-tite® PTFE thread tape or OXY-TITE® paste
- Sealing temperature: -65°F to 400°F (-54°C to 204°C)
- Pressures: to 3,000 PSI (204 BAR) for gas, to 10,000 PSI (680 BAR) for liquid



PART NO.	SIZE	CASE QTY.
49050	50 ml. Tube (1.69 fl. oz.)	12
49250	250 ml. Tube (8.45 fl. oz.)	6



THREAD SEALANTS

LEAK-TITE® BLUE

Economical Thread Sealant with PTFE




- Contains PTFE particles for greater sealing power
- Will not harden or dry out over time; remains flexible for easy disassembly
- Non-toxic, contains no solvents
- Sticks to hot, oily threads
- Ideal for use on production lines and fabrication shops
- Easy clean-up, will not stain hands or clothing
- For use on metal and PVC plastic pipe threads
- For sealing water, air, steam, natural gas, refrigerants, gasoline and ammonia
- Do not use on oxygen service; use Slic-tite® PTFE thread tape or OXY-TITE® paste
- Sealing temperature: -50°F to 500°F (-45°C to 260°C)
- Pressures: to 1,500 PSI (102 BAR) for gas, to 5,000 PSI (340 BAR) for liquid
- No V.O.C.'s



PART NO.	SIZE	CASE QTY.
46009	1/4 pt. BIC	24
46029	1 pt. BIC	24
46013	1 qt.	12
46049	1 qt. BIC	12
46069	55 gal.	1

BIC = Brush in Cap



PIPETITE® PASTE

Soft Set Pipe Thread Compound




- Soft set pipe thread compound
- For refrigerants, butane, gasoline, oil, as well as water, steam, air, natural gas and LP gas
- Use on metal threads
- Do not use on oxygen service; use Slic-tite® PTFE thread tape or OXY-TITE® paste
- Sealing temperature: up to 400°F (204°C)
- Pressures: to 2,600 PSI (177 BAR) for gas, to 5,000 PSI (340 BAR) for liquid
- No V.O.C.'s



PART NO.	SIZE	CASE QTY.
12109	1/4 pt. BIC	24
12110	1/2 pt. BIC	24
12112	1 pt. BIC	24

BIC = Brush in Cap



T-O-T®

Pipe Thread Compound



- No-drip, siliconized for fast application on metal threads
- For water, steam, air and natural gas service
- Lead-free, non-toxic
- Do not use on oxygen service; use Slic-tite® PTFE thread tape or OXY-TITE® paste
- Sealing temperature: up to 350°F (177°C)
- Pressures: to 350 PSI (24 BAR) for gas, to 500 PSI (34 BAR) for liquid
- No V.O.C.'s



PART NO.	SIZE	CASE QTY.
12219	1/2 pt. BIC	24
12208	5 lb.	6

BIC = Brush in Cap



THREAD SEALANTS

OXY-TITE®

Pipe Thread Sealant for Oxygen

- PTFE thread sealant for oxygen services
- Each batch tested to ASTM G-72
- Pressure: to 2,600 PSI (180 BAR)

- Sealing temperature: -320°F to 450°F (-196°C to 232°C)
- No V.O.C.'s



PART NO.	SIZE	CASE QTY.
42805	4 oz.	6



PIPETITE-STIK®

Soft Set Pipe Thread Compound



- Certified by NSF to meet ANSI/NSF Std. 61 for use on potable water
- Thread compound in handy stick form
- For water, steam, air, natural gas and LP gas
- Use on metal threads
- Classified by Underwriters Laboratories, U.S.A
- Non-toxic, lead-free

- Do not use on oxygen service; use Slic-tite® PTFE thread tape or OXY-TITE® paste
- Sealing temperature: up to 350°F (177°C)
- Pressures: to 350 PSI (24 BAR) for gas, to 2,000 PSI (136 BAR) for liquid



PART NO.	SIZE	CASE QTY.
Standard Size		
11175	1-1/4 oz.	144
King Size Dozen Display Box		
11176	4 oz.	72



PLASTO-JOINT STIK®

Plastic Thread Sealant

- Pipe thread compound in handy stick form
- For use on ABS, PVC, and CPVC plastic pipe and fittings and on metal threads

- Do not use on oxygen service; use Slic-tite® PTFE thread tape or OXY-TITE® paste
- Sealing temperature: up to 250°F (121°C)

- Pressures: to 300 PSI (20 BAR) for gas, to 500 PSI (34 BAR) for liquid
- Ideal for pool and spa installation



PART NO.	SIZE	CASE QTY.
Dozen Display Pack		
11775	1-1/4 oz.	144
13675	1-1/4 oz.	36



Slic-tite® STIK WITH PTFE

Thread Sealant in a Stick



- High-performance thread compound in handy stick form
- Contains PTFE particles for greater sealing power
- Non-toxic, non-staining, non-drying
- Designed for professional servicemen and tradesmen
- Clean – white-washes off easily
- Use on metal and PVC pipe thread connections for water, air, natural gas, steam, gasoline, oil, refrigerants and ammonia

- Do not use on oxygen service; use Slic-tite® PTFE thread tape or OXY-TITE® paste
- Sealing temperature: -50°F to 350°F (-46°C to 177°C)
- Pressures: to 500 PSI (34 BAR) for gas, to 5,000 PSI (340 BAR) for liquid



PART NO.	SIZE	CASE QTY.
Dozen Display Pack		
41600	1-1/4 oz.	24



THREAD SEALANTS

CORD OF PTFE

For Packing and Gaskets



- Use as packing for faucets, valves, pumps, etc.; also as gasket between flanges
- Product packaged in a unique Visu-Kit that keeps cord clean and ready for use; the durable kit can be mounted over the workbench or carried in a toolbox
- Sealing temperature: -450°F to 500°F (-268°C to 260°C)



PART NO.	SIZE	CASE QTY.
Carded - 1 per card		
45089	3/32" x 25'	6
45090	3/32" x 50'	6
45091	5/32" x 20'	6
45092	7/32" x 10'	6
Bulk Packed		
45097	9/32" x 9'	6



Slic-tite® PTFE THREAD TAPE

Premium Grade, High Density



- Thickness 4 mils
- Premium grade, high density
- Provides a highly resistant seal on pipe threads for all types of service
- Suitable for use with solvents, chemicals, oxygen and on food lines
- Non-toxic
- Permits easy disassembly, even after many years of service
- Meets Mil. Spec. T-27730A
- Sealing temperature: -450°F to 550°F (-268°C to 288°C)
- Pressure: to 2,000 PSI (136 BAR)



PART NO.	SIZE	CASE QTY.
Dozen Display Box		
44080	1/4" x 300"	12
44081	1/4" x 600"	12
44082	1/2" x 300"	12
44083	1/2" x 600"	12
44084	1/2" x 1200"	12
44101	1/2" x 600"	144
44085	3/4" x 300"	12
44086	3/4" x 600"	12
44087	1" x 300"	12
44088	1" x 600"	12
44094	1/2" x 260" YEL	12
44095	1/2" x 260" PINK	12
Carded - 1 per card		
44003	1/2" x 600"	12

PIPE THREAD TAPE OF PTFE

Contractor Grade



- Thickness 3 mils
- Contractor grade, low density
- Provides a highly resistant seal on pipe threads for all types of service
- Suitable for use with solvents, chemicals, oxygen and on food lines
- Non-toxic
- Permits easy disassembly, even after years of service
- Meets Mil. Spec. T-27730A
- Sealing temperature: -450°F to 550°F (-268°C to 288°C)
- Pressure: to 2,000 PSI (136 BAR)
- Sold in case quantities only
- Suitable for use on stainless steel



PART NO.	SIZE	CASE QTY.
44070	1/4" x 520"	144
44071	1/2" x 260"	144
44072	1/2" x 520"	144
47272	1/2" x 520"	72
44073	1/2" x 1296"	144
44074	3/4" x 260"	144
44075	3/4" x 520"	144
44076	3/4" x 1296"	144
44077	1" x 260"	144
44078	1" x 520"	144
44079	1" x 1296"	144

ABC TOOLS



A New Line Of Products

Since 1942 millions of industry professionals have trusted LA-CO® to help join piping systems together. With the new ABC Tools — a line of pro-grade Abrasives, Brushes, and Cutting tools — LA-CO is flexing its expertise and helping professionals join piping systems more than we ever have before.

ABRASIVE CLOTH

- Open mesh for all projects
- Premium Grade
- Waterproof
- 180 Grit

Open Mesh

PART NO.	SIZE	CASE QTY.
79720	5 yards	24
79721	10 yards	24



SAND CLOTH

- Closed cloth for a quality finish
- Water resistant
- Aluminum oxide coating
- 120 Grit

Closed Cloth

PART NO.	SIZE	CASE QTY.
79722	5 yards	24
79723	10 yards	24

