


JACK SCREWS

- Equivalent to AMP, CANNON & TRW Jack Screws
- "D" subminiature connector mounting screw
- Other sizes upon request

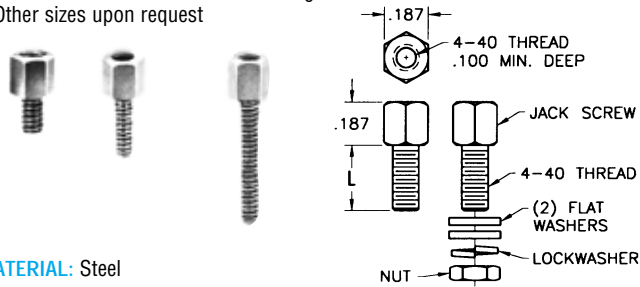


MATERIAL: Steel

JACK ONLY		"L" DIM.	JACK WITH HARDWARE (Supplied Unassembled in Bulk)	
ZINC PLATE & GOLD IRIDITE	ZINC PLATE & CLEAR CHROMATE		ZINC PLATE & GOLD IRIDITE	ZINC PLATE & CLEAR CHROMATE
7228	7228-5	.250	7229	7229-5
7230	7230-5	.312	7231	7231-5
7232	7232-5	.625	7233	7233-5

SEMS JACK SCREWS

- "D" subminiature connector mounting screw
- Captivated helical spring lockwasher, simplifies use
- Flat washer and nut supplied unassembled

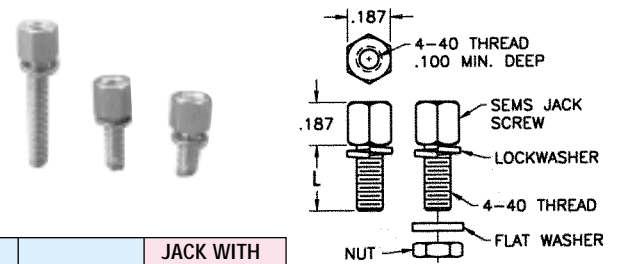

"L" DIM.	JACK ONLY CAT. NO.	JACK WITH HARDWARE (Supplied Unassembled in Bulk)
.285	7235	7236
.347	7237	7238
.660	7239	7240

MATERIAL: Steel, Zinc Plate & Clear Chromate


MOUNTING HARDWARE

Our assortment of standard clips and washers offer the needed flexibility to secure your connectors in the manner best suited to your instrumentation and design.

"U" CLIP



Supplied Unassembled




MATERIAL:

CAT. NO. 2062 Clip & Screw: Steel, Zinc Plate & Gold Iridite

SADDLE WASHER



Supplied Unassembled




MATERIAL:

CAT. NO. 2063 Clip & Screw: Steel, Zinc Plate & Gold Iridite

"BOW TIE" RETAINING CLIP



Supplied Unassembled



MATERIAL:

CAT. NO.	X
2060	4-40 x 1/4
2061	4-40 x 9/32


Clip & Screw: Steel, Zinc Plate & Gold Iridite

TURNABLE JACK SCREWS

Turnable jack screws, available with or without screwdriver slot make mating and disconnecting computer connectors quick and easy.

DIRECT ACCESS

AVAILABLE WITH OR WITHOUT SCREWDRIVER SLOT.




"T" DIM.	"L" DIM.	CAT. NO. WITHOUT SLOT	CAT. NO. WITH SLOT
.125	.250	2064	2065
.250	.437	2066	2067

MATERIAL: Steel, Black Oxide

STRAIGHT KNURL

AVAILABLE WITH OR WITHOUT SCREWDRIVER SLOT.




CAT. NO. WITHOUT SLOT	CAT. NO. WITH SLOT
2072	2073

MATERIAL:

Steel, Zinc Plate & Clear Chromate

SLIM LINE

AVAILABLE WITH OR WITHOUT SCREWDRIVER SLOT.

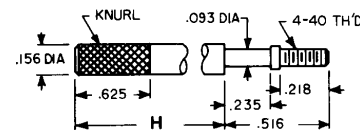

"H" DIM.	CAT. NO. WITHOUT SLOT	CAT. NO. WITH SLOT
1.250	2068	2069
1.750	2070	2071

MATERIAL: Steel, Nickel Plate

PANEL HARDWARE


Designers' Choice



MATERIAL: Stainless Steel per ASTM-A581/A582


THUMB SCREWS

4-40

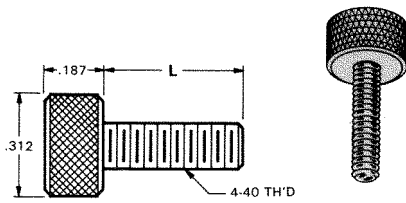


CAT. NO.	LENGTH
2400	.312
2401	.375
2402	.437
2403	.500

6-32

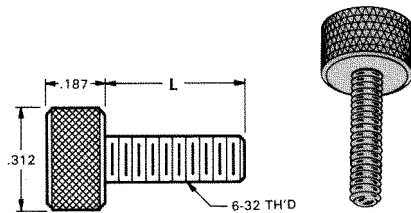

CAT. NO.	LENGTH
2404	.312
2405	.375
2406	.437
2407	.500


8-32

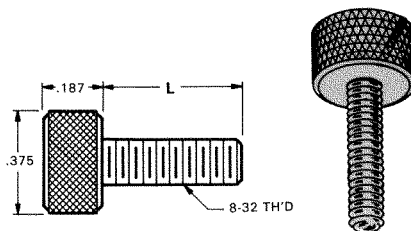

CAT. NO.	LENGTH
2408	.375
2409	.437
2410	.500
2411	.562
2412	.625


CAPTIVE SCREWS

4-40

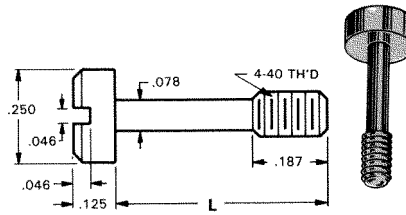


CAT. NO.	LENGTH
2413	.469
2414	.531

6-32

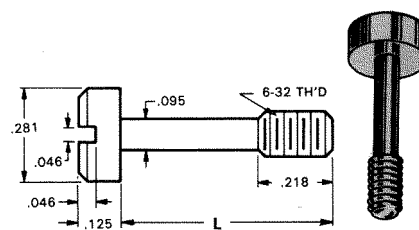

CAT. NO.	LENGTH
2415	.531
2416	.593
2417	.656


8-32

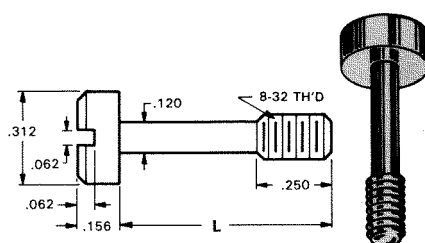

CAT. NO.	LENGTH
2418	.656
2419	.718
2420	.781


SHOULDER SCREWS

4-40

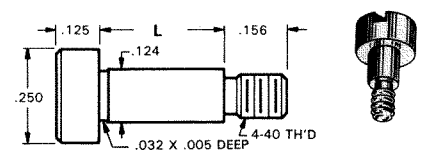


SLOTTED		SOCKET
CAT. NO.	LENGTH	CAT. NO.
2421	.125	2441
2422	.250	2442
2423	.375	2443
2424	.500	2444

6-32

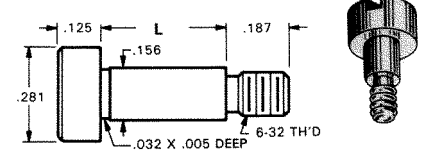

SLOTTED		SOCKET
CAT. NO.	LENGTH	CAT. NO.
2425	.125	2445
2426	.250	2446
2427	.375	2447
2428	.500	2448
2429	.625	2449
2430	.750	2450

8-32

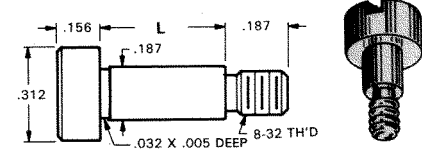

SLOTTED		SOCKET
CAT. NO.	LENGTH	CAT. NO.
2431	.125	2451
2432	.250	2452
2433	.375	2453
2434	.500	2454
2435	.625	2455
2436	.750	2456
2437	1.000	2457






Designers' Choice

PANEL HARDWARE

STAINLESS STEEL CAPTIVE PANEL SCREWS

MATERIAL: Stainless Steel per ASTM-A581/A-582

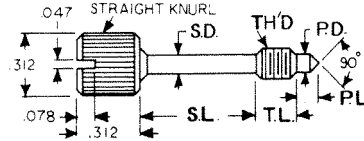
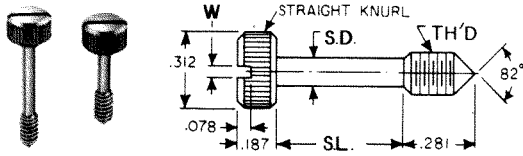


CAT. NO.	TH'D	S.D. +.005	S.L. +.010	W +.005 -.000
8700	4-40	.078	.375	.036
8701	4-40	.078	.500	.036
8702	4-40	.078	.625	.036
8703	6-32	.095	.375	.045
8704	6-32	.095	.500	.045
8705	6-32	.095	.625	.045



CAT. NO.	TH'D	T.L. +.000 -.015	S.D. +.005	S.L. ±.010	P.D. +.000 -.010	P.L. ±.015
8706	4-40	.125	.078	.171	.078	.078
8707	4-40	.125	.078	.296	.078	.078
8708	4-40	.125	.078	.421	.078	.078
8709	6-32	.218	.095	.187	.095	.093
8710	6-32	.218	.095	.312	.095	.093
8711	6-32	.218	.095	.437	.095	.093

SHAFT LOCKS (1/8" & 1/4")


MATERIAL: Brass, ASTM-B16, Nickel Plate per QQ-N-290



CAT. NO. 1700



CAT. NO. 1701



CAT. NO. 1702

PANEL BEARINGS

STANDARD AND MINIATURE

MATERIAL: Brass, Nickel Plated (QQ-N-290). Supplied unassembled.



CAT. NO.	A	B	C	D	E
1705	.253	.437	.500	.437	3/8-32 Standard
1706	.128	.343	.437	.375	1/4-32 Miniature


THUMB SCREWS

For quick removal of panel from chassis.

Other variations available

MATERIAL: Brass, Nickel Plated (QQ-N-290)


CAT. NO.	THREAD
1708	6-32
1709	8-32
1710	10-32



STAINLESS STEEL CAPTIVE SCREW

For quick removal of panel from chassis. Other variations available

MATERIAL: Stainless Steel per ASTM-A581/A582

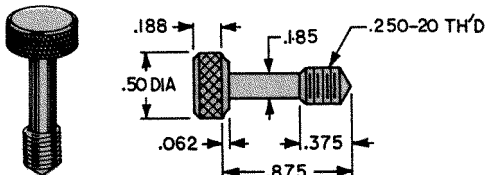


CAT. NO. 1704

PRECISION PANEL NUTS

For Volume Controls, Switches, Capacitors, Tip Jacks, etc.

MATERIAL: Brass, Nickel Plated (QQ-N-290).



CAT. NO.	FOR	THREAD	DIAMETER	THICKNESS
1448	Mounting	1/4-32	3/8 Hex	3/32"
1449	Mini. Control	1/4-32	5/16 Hex	5/64"
1456	Vol. Control	3/8-32	1/2 Hex	3/32"
1458	Switch	15/32-32	9/16 Hex	5/64"
1459	Switch Ring	15/32-32	5/8 Knurled	1/16"
1472	Filter	5/16-32	3/8 Hex	3/32"


1/4" - 1/4" SHAFT COUPLING

MATERIAL: Brass, Nickel Plated (QQ-N-290).

Two set screws hold shaft securely.

Supplied unassembled.

CAT. NO. 1453

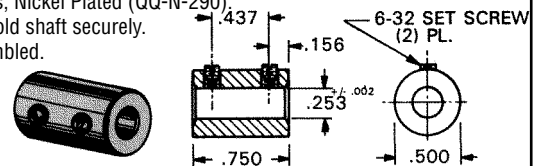


VOLUME CONTROL EXTENDERS

For 1/4" volume control shafts having 3/8-32 threaded bushings.

MATERIAL: Brass, Nickel Plated (QQ-N-290).

CAT. NO.	A	B
1464	.625	.250
1465	.625	.375
1466	.687	.500
1467	.750	.250





Designers' Choice

HOUSINGS & HEADERS

PLUG-IN HOUSINGS

Enhance the appearance and give a professional look to your products using these molded housings. Ideally suited for packaging relays, logic packages, networks and miniature circuitry. Durable, lightweight covers withstand vibrations and rough usage.

HEADERS: Molded of G.P. black phenolic. Fits standard sockets. **PINS:** Brass, Nickel Plated.


MATERIAL CHARACTERISTICS:

- Variety of molded materials
- Good chemical resistance.

POLYSTYRENE: For general purpose use where high impact strength is not required and temperature would not exceed 170° F.


LEXAN: 3 Times the impact strength of Polystyrene. Excellent electrical properties. Use wherever temperatures of 280° F exist

Housing with Octal Header & 4 Screws CAT. NO.	Housing Only CAT. NO.	Fig. No.	Type	Material	Color
660	670	1	Mini	Lexan	Clear
661	671	1	Mini	Lexan	White
662	672	1	Mini	Polystyrene	Clear
641	675	1	Mini	Polystyrene	Opaque Black
663	673	2	Small	Lexan	Clear
664	674	2	Small	Lexan	White
665	676	2	Small	Polystyrene	Clear
643	647	2	Small	Polystyrene	Opaque Black
650	649	3	Large	Lexan	Clear
668	679	3	Large	Polystyrene	Clear
677	666	3	Large	Polystyrene	Opaque Black
639	640	4	Xtra-L'ge	Polystyrene	Clear
710	711	4	Xtra-L'ge	Polystyrene	Opaque Black
712	713	4	Xtra-L'ge	Lexan	Clear

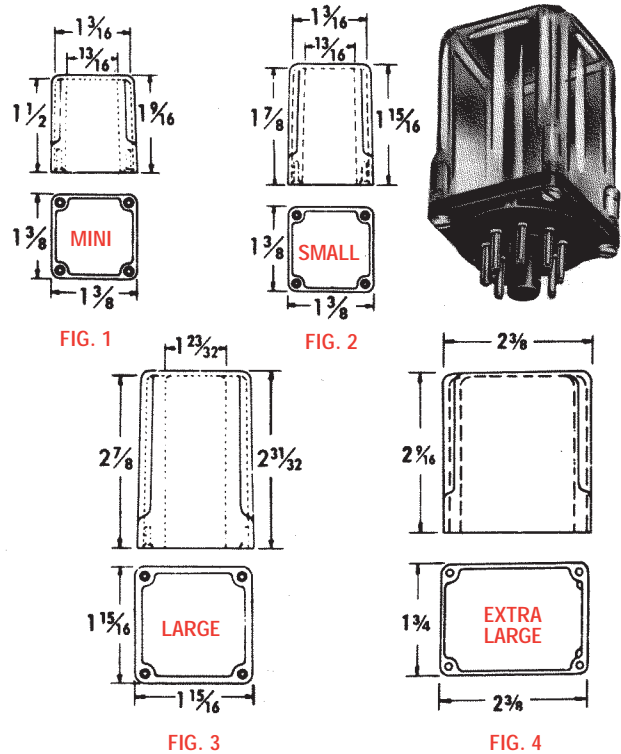


HEADERS FOR THE ABOVE HOUSINGS

HEADERS: Headers are available in a variety of pin configurations that fit standard sockets. Molded of general purpose phenolic with brass nickel plated pins sturdily staked.

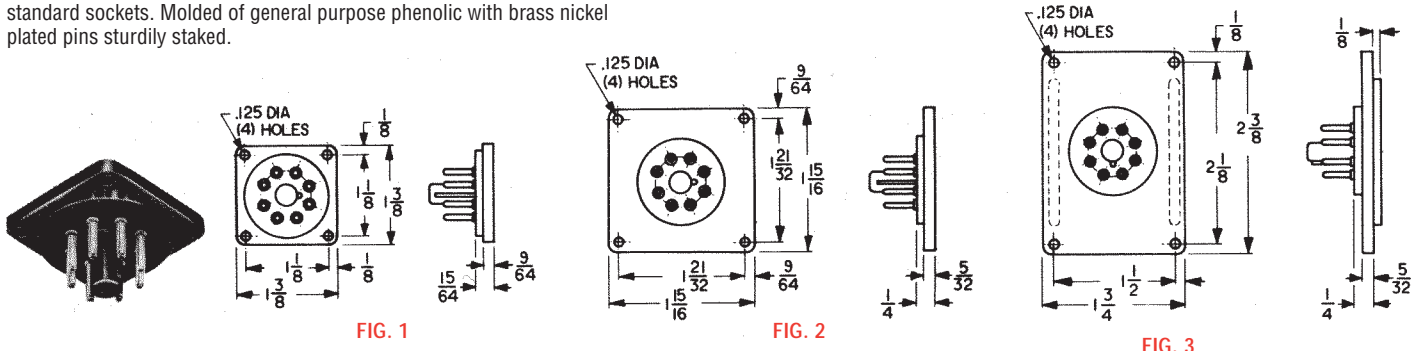

1 3/8 Sq. Headers for Mini & Small Housing (Fig. 1 Above) CAT. NO.	Pin Configuration	1 15/16 Sq. Headers for Large Housing (Fig. 2 Above) CAT. NO.	1 3/4 x 2 3/8 Headers for Extra Large Housing (Fig. 3 Above) CAT. NO.
681	Octal	685	690
682	Nine Pin	Not Available	Not Available
683	Eleven Pin	686	714



SELF TAPPING SCREW
CAT. NO. 689-For covers #4x3/8 Lg.