
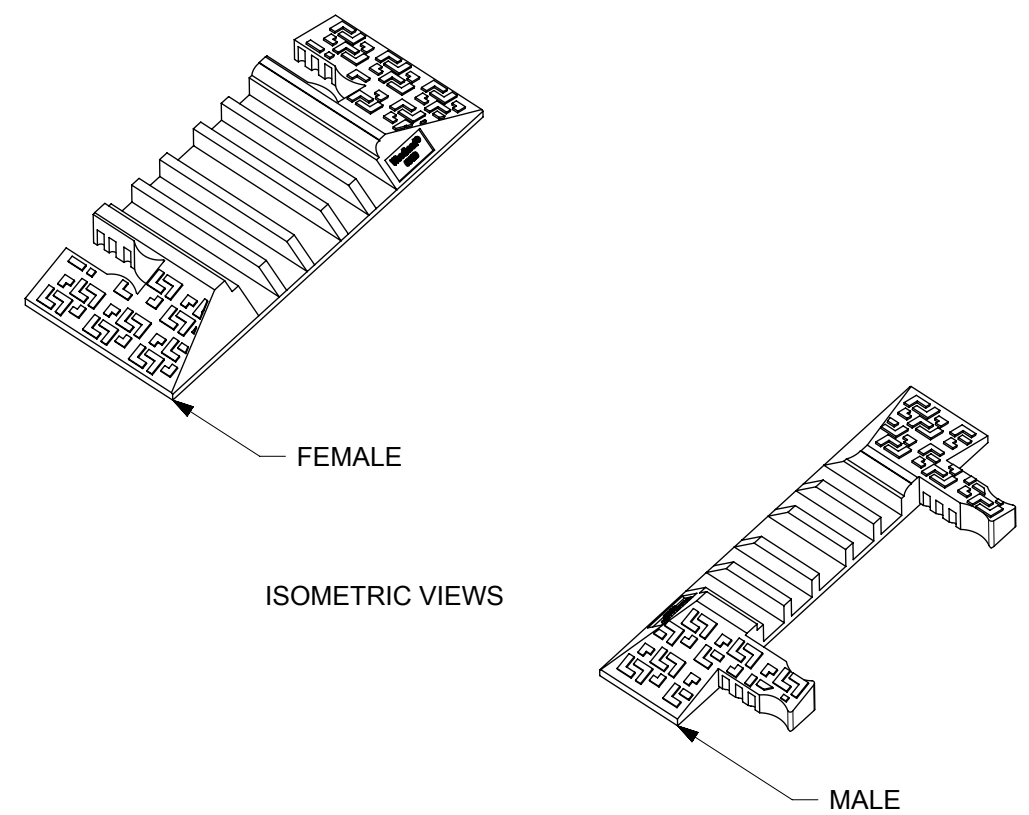
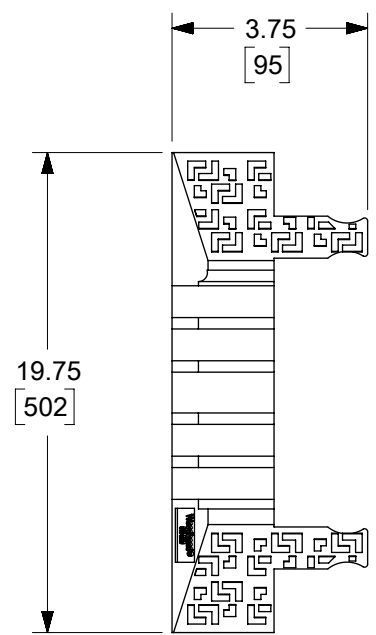


SAME DIMENSIONS FOR BOTH MALE AND FEMALE

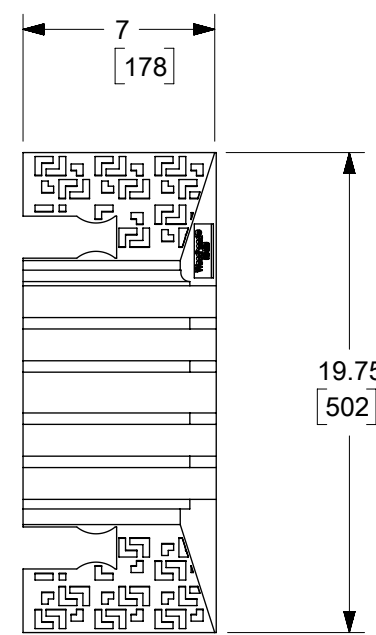

- NOTES:
- 1) MATERIAL: HEAVY-DUTY, NON-CONDUCTIVE POLYURETHANE, UV STABILIZED  
COLOR: BLACK
  - 2) WEIGHT:  
MALE: 2.5 LBS/ 1.1 KG  
FEMALE: 4.5 LBS/ 2 KG
  - 3) LOAD CAPACITY PER TIRE/AXLE:  
16,300 LBS PER TIRE/32,600 LBS PER AXLE AT 70°F
  - 4) OPERATING TEMPERATURE: -40°F TO 120°F (-40°C TO 48°C)
  - 5) ENGINEERING NO.: 610-END
  - 6) ROHS COMPLIANT

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

EC NO: 112083 DRWN: WLEUNG CHKD: DNGUYEN62 APPR: JFMURPHY	2016/10/17 2017/01/06 2017/02/13	GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± 1.0 °	DIMENSION UNITS: INCH SCALE: 1:8				
	4 PLACES ± 1.0 3 PLACES ± 1.0 2 PLACES ± 1.0 1 PLACE ± 1.0 0 PLACES ± 1.0	DRWN BY: WLEUNG DATE: 2016/04/18	5 CHANNEL END CAPS, MALE & FEMALE SAFEWAY® CABLE PROTECTOR				
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	CHKD BY: GSUDHINI DATE: 2016/04/25	PRODUCT CUSTOMER DRAWING				
	APPR BY: BWOODMAN DATE: 2016/04/28	DRAWING SIZE: B THIRD ANGLE PROJECTION	SERIES: 130138 MATERIAL NUMBER: 1301380117	CUSTOMER:			
	B	REV:	DOCUMENT NUMBER: 1301380117 DOC TYPE: PSD DOC PART: 000 SHEET NUMBER: 1 OF 1				