

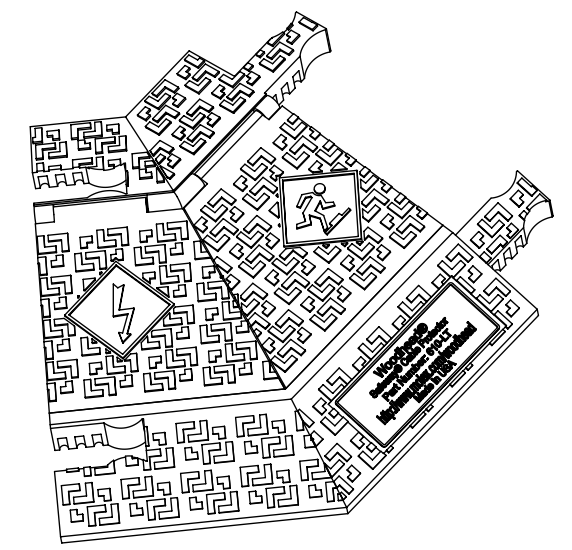
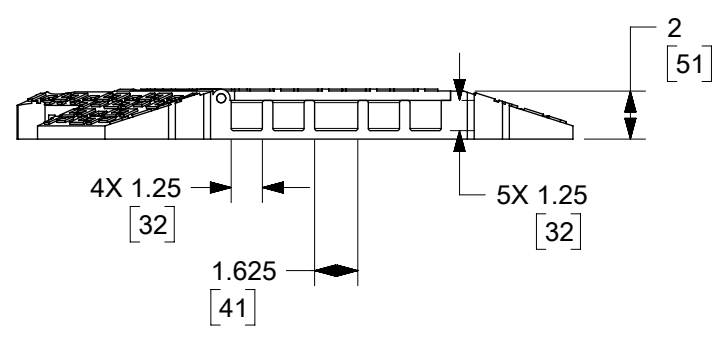


Left Turn:
Each left turn piece allows a 45° change in direction of the cable run. Turn pieces connect directly to the end of the cable protectors. Multiple left turns may be used in combination to produce a 90° or greater change in direction of the cable run.

SAFETY WARNING SYMBOLS
(PER ANSI Z535.3-2011)

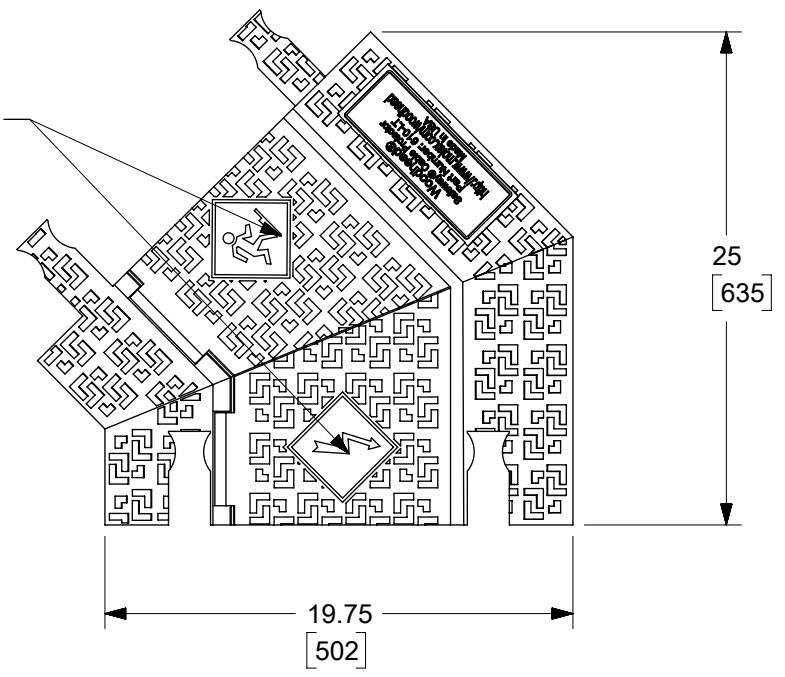

ISOMETRIC VIEWS

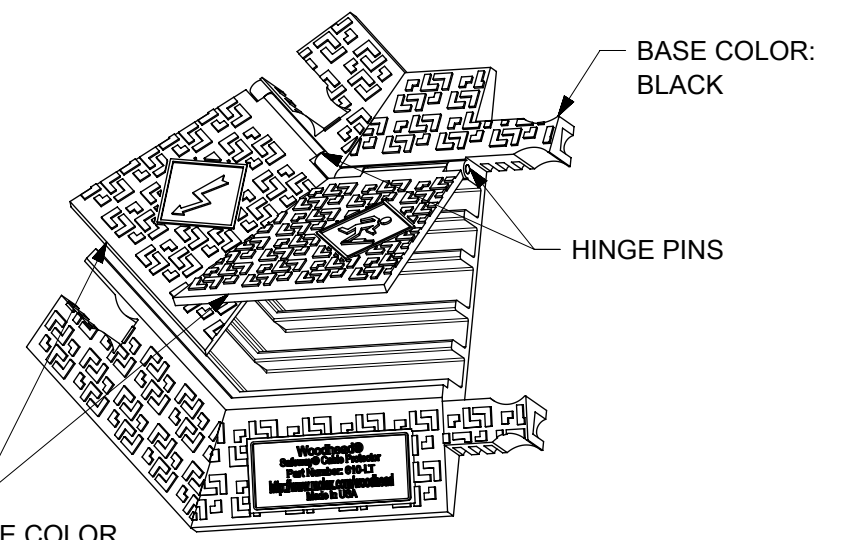

LID COLOR:
SAFETY ORANGE COLOR
(PER ANSI Z535.1-2006)

NOTES:

- 1) MATERIAL:
BASE/LID: HEAVY-DUTY, NON-CONDUCTIVE POLYURETHANE, UV STABILIZED
HINGE PIN: REINFORCED FIBERGLASS
- 2) WEIGHT: 15.5 LBS/ 7 KG
- 3) LOAD CAPACITY PER TIRE/AXLE: 16,300 LBS PER TIRE/32,600 LBS PER AXLE AT 70°F
- 4) OPERATING TEMPERATURE: -40°F TO 120°F (-40°C TO 48°C)
- 5) ENGINEERING NO.: 610-LT
- 6) ROHS COMPLIANT

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

EC NO: 112083 DRWN: WLEUNG CHKD: DNGUYEN62 APPR: JFMURPHY	RELEASED 2016/10/18 2017/01/06 2017/02/13	GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± 1.0 °	DIMENSION UNITS: INCH SCALE: 1:8				
	4 PLACES ± 1.0 3 PLACES ± 1.0 2 PLACES ± 1.0 1 PLACE ± 1.0 0 PLACES ± 1.0	DRWN BY: WLEUNG DATE: 2016/04/18	5 CHANNEL 45° LEFT TURN SAFEWAY® CABLE PROTECTOR				
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	CHK'D BY: GSUDHINI DATE: 2016/04/25			PRODUCT CUSTOMER DRAWING		
		APPR BY: BWOODMAN DATE: 2016/04/28	DRAWING SIZE: B THIRD ANGLE PROJECTION	SERIES: 130138 MATERIAL NUMBER: 1301380118	CUSTOMER:		
				DOCUMENT NUMBER: 1301380118 DOC TYPE: PSD DOC PART: 000 SHEET NUMBER: 1 OF 1			