

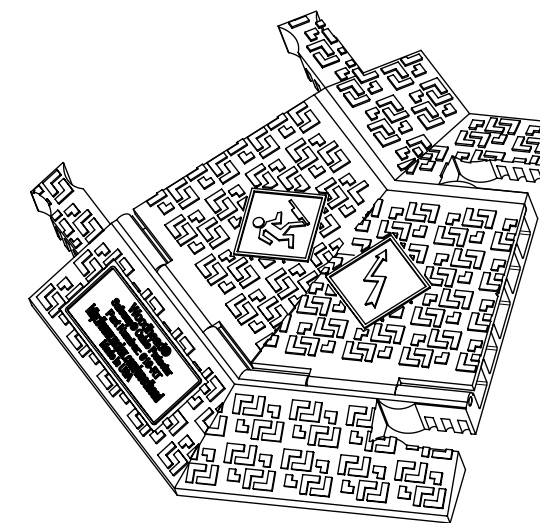


RightTurn:
 Each right turn piece allows a 45° change in direction of the cable run. Turn pieces connect directly to the end of the cable protectors. Multiple right turns may be used in combination to produce a 90° or greater change in direction of the cable run.

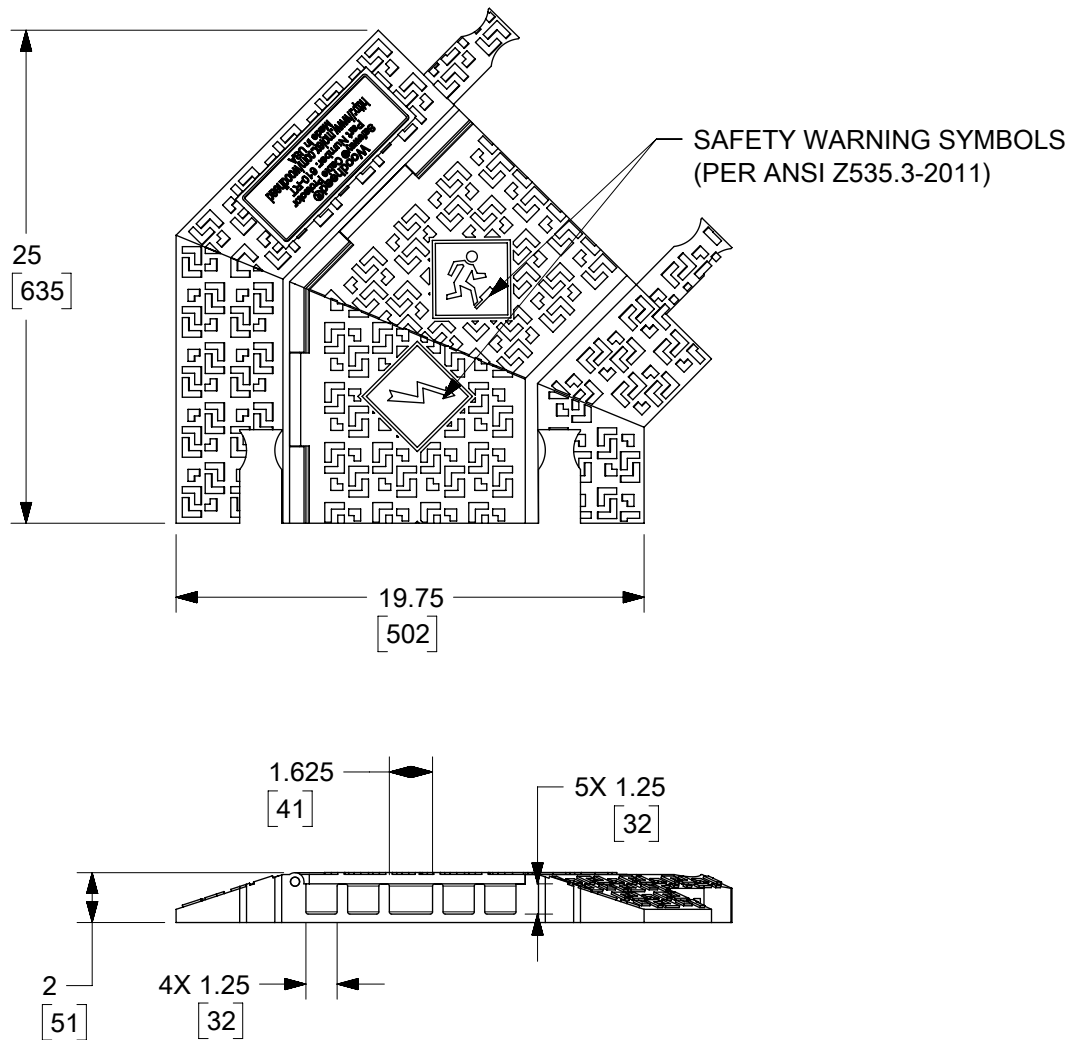

ISOMETRIC VIEWS

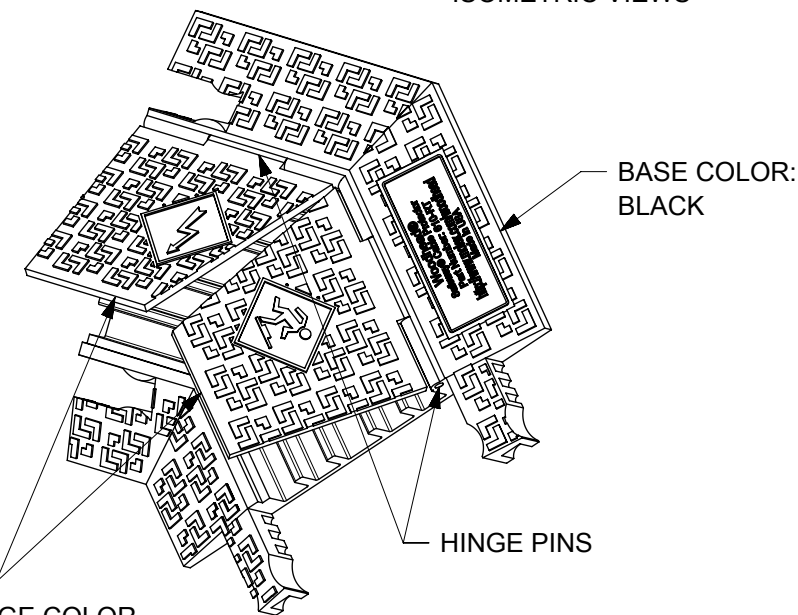

LID COLOR:
SAFETY ORANGE COLOR
(PER ANSI Z535.1-2006)

NOTES:

- 1) MATERIAL:
 BASE/LID: HEAVY-DUTY, NON-CONDUCTIVE POLYURETHANE, UV STABILIZED
 HINGE PIN: REINFORCED FIBERGLASS
- 2) WEIGHT: 15.5 LBS/ 7 KG
- 3) LOAD CAPACITY PER TIRE/AXLE: 16,300 LBS PER TIRE/32,600 LBS PER AXLE AT 70°F
- 4) OPERATING TEMPERATURE: -40°F TO 120°F (-40°C TO 48°C)
- 5) ENGINEERING NO.: 610-RT
- 6) ROHS COMPLIANT

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

EC NO: 112083 DRWN: WLEUNG CHKD: DNGUYEN62 APPR: JFMURPHY	2016/10/17	2017/01/06	2017/02/13	GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± 1.0 ° 4 PLACES ± 1.0 3 PLACES ± 1.0 2 PLACES ± 1.0 1 PLACE ± 1.0 0 PLACES ± 1.0 DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DIMENSION UNITS	SCALE						
	RELEASED				INCH	1:8						
					DRWN BY	DATE						
							WLEUNG	2016/04/18	5 CHANNEL 45° RIGHT TURN SAFEWAY® CABLE PROTECTOR			
					CHK'D BY	DATE						
							GSUDHINI	2016/04/25	PRODUCT CUSTOMER DRAWING			
			APPR BY	DATE								
					BWOODMAN	2016/04/28	SERIES	MATERIAL NUMBER	CUSTOMER			
					DRAWING SIZE	THIRD ANGLE PROJECTION	130138	1301380119				
					B		DOCUMENT NUMBER	DOC TYPE	DOC PART	SHEET NUMBER		
							1301380119	PSD	000	1 OF 1		