



Powered Attic Ventilators

An economical way to beat the heat.

Trapped attic air can easily reach 150° or more. These units remove super-heated attic air, making any home more comfortable. Whether it's air conditioned or not. In those homes that are, the air conditioners run less and don't have to work nearly as hard. And all Broan Powered Attic Ventilators are as efficient as they are dependable.

- 14" diameter steel blade specially designed for maximum air movement.
- Operates automatically – adjustable thermostat built-in.
- Thermally protected, permanently lubricated motor.

Roof-Mounted

Models 350, 355, 356, 358

- Durable off-white, fade-resistant PVC dome can be painted to match roof color (Models 350, 355, 356).
- Heavy gauge aluminum dome (Model 358).
- Mounts easily between rafters – template included for cutting roof boards and shingles.
- Mesh screen keeps out birds and insects.
- 3 $\frac{7}{8}$ " high splash guard helps keep out rain.
- Heavy gauge metal flashing stands up to nailing and tarring, regardless of climate.
- Thermostat and motor accessible from outside for easy servicing, if required.
- HVI certified air delivery @ 0.03" static pressure.

Model 350 – 1050 CFM for attics up to 1500 sq. ft.

Model 355/358 – 1200 CFM for attics up to 1715 sq. ft.

Model 356 – 1600 CFM for attics up to 2285 sq. ft.

- To determine correct model for your attic size, see page 32.





General Accessories

Utilize our static intake and exhaust vents to ensure the efficient operation of your Broan Powered Attic Ventilator. To determine the number required for your specific application, see page 32.

- Model 445 Aluminum Roof Vent; 15" x 16" base; 8" opening; 3 $\frac{3}{4}$ " high; Free area: 45 square inches (6 per carton).
- Model 446 Aluminum Eave Vent; 4" x 16"; Free area: 22.7 square inches (24 per carton).
- Model 447 Aluminum Eave Vent; 8" x 16"; Free area: 54.6 square inches (12 per carton).

Gable-Mounted

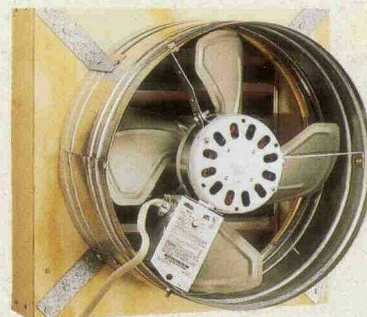


Model 353

- Quiet, high-performance operation for inside-the-attic applications.
- Galvanized steel housing, ribbed for added strength.
- Mounting brackets simplify installation.
- 1140 CFM for attics up to 1630 sq. ft.

Model 35316

- 1600 CFM for attics up to 2280 sq. ft.
- Other features same as Model 353.

Gable-Mounted Unit Accessory



Model 433 Automatic Shutter

- Allows more air movement than conventional stationary attic louvers.
- Counter-balanced aluminum vanes open automatically when ventilator is turned on, close when fan stops.
- Flange fits flush against outside wall for neat, smooth appearance.
- Reinforced for strength; provides weathertight closure.

