




### HS-T-PF

### THIN WALL HEAT SHRINK TUBING

### CROSS-LINKED POLYOLEFIN

### 6 INCH LENGTHS

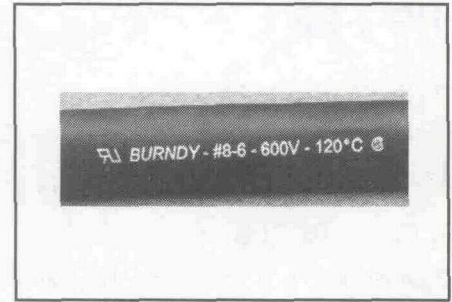

SURFACE MARKED

Type HS-T-PF is a flexible thin wall, flame retardant heat shrink tubing made of cross-linked polyolefin. The 2:1 shrink ratio allows for faster shrink recovery, covering wire sizes: #18 AWG to 300 kcmil. Operating temperatures from -55°C to 135°C with a shrink temperature of 120°C.



Meets MIL-1-25053/5  
600 VOLTS

Catalog Number	Nominal Diameter Inches	Min. Exp. ID In.	Max. Recov. ID In.	Nom. Wall Thickness In.	Conductor Range	# Pcs. Black	# Pcs. Ea. Color
HSM116T6PF26	1/16	0.06	0.03	0.018	#18	8	3
HSB116T6PF26	1/16	0.06	0.03	0.018	#18	26	0
HSM332T6PF24	3/32	0.09	0.05	0.020	#18-16	6	3
HSB332T6PF24	3/32	0.09	0.05	0.020	#18-16	24	0
HSM18T6PF20	1/8	0.12	0.06	0.020	#18-14	2	3
HSB18T6PF20	1/8	0.12	0.06	0.020	#18-14	20	0
HSM316T6PF18	3/16	0.19	0.09	0.020	#18-12	6	2
HSB316T6PF18	3/16	0.19	0.09	0.020	#18-12	18	0
HSM14T6PF14	1/4	0.25	0.12	0.180	#14-10	2	2
HSB14T6PF14	1/4	0.25	0.12	0.180	#14-10	14	0
HSM38T6PF12	3/8	0.38	0.19	0.020	#8-6	6	1
HSB38T6PF12	3/8	0.38	0.19	0.020	#8-6	12	0
HSM12T6PF10	1/2	0.50	0.12	0.020	#6-2	4	1
HSB12T6PF10	1/2	0.50	0.12	0.020	#6-2	10	0
HSM34T6PF8	3/4	0.75	0.38	0.020	#1 - 3/0	2	1
HSB34T6PF8	3/4	0.75	0.38	0.020	#1 - 3/0	8	0
HSM100T6PF6	1	1.00	0.50	0.180	2/0 - 300	1	1
HSB100T6PF7	1	1.00	0.50	0.180	2/0 - 300	7	0

HSB series - all black

HSM series - multiple colors: black, blue, clear, green, red, white, yellow

HSB11612T6PF14	1/16, 3/32, 1/8, 3/16, 1/4, 3/8, 1/2					14	0
HSB38100T6PF8	3/8, 1/2, 3/4, 1"					8	0

Multiple diameter packages contain two pieces of each size listed: Black only.