



### TYPE Y45 HYPRESS™ 10,000 PSI

### 15 TON REMOTE POWER OPERATED HYDRAULIC TOOLS

The Y45 . . . series is designed for remote hydraulic operation. A C-shaped head design provides easy installation of tap and splice connectors. The hook style head with extensive ram travel operates easily on large distribution and transmission conductors. Together with accessories, the Y45...Series tooling may be used on overhead lines. The small light-weight head design is very adaptable for work in underground trenches and manholes.

Cat. No. PT6515 is required to use "U-" type dies in all Y45 variations. Order Head, Hose, Pump, Dies and accessories separately. 5 year limited warranty.




PT6545

### BENEFITS

- Easy connector installation and tool removal from line conductors with the open C-shaped head.
- Easily lifted into working position using lifting eye.
- Easy die changing plus secure die alignment is provided with the positive die lock buttons.
- Long life expectancy is provided with fully protected ram and die buttons.
- Rapid assembly and disassembly is provided with the quick disconnect hydraulic coupler.
- Rugged design provides long life expectancy.
- The Y45-1 head has molded rubber covering.
- Easy tool handling plus hydraulic coupler protection is provided with the rubber boot.
- 5 year limited warranty.

### FEATURES

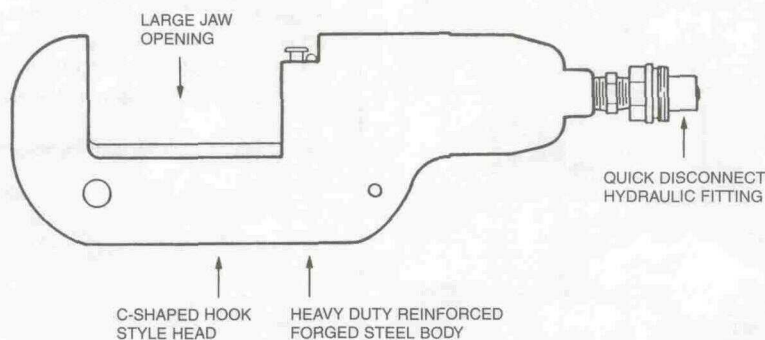

### SPECIFICATIONS

	<b>Y45</b>
Operating pressure:	10,000 psi
Force developed:	15 Tons
Weight (less case):	153/4 lbs.
Maximum Width:	71/4 "
Maximum Height:	141/4 "
Molded Covering:	—

### FOR USE ON

AWG/KCMIL WIRE SIZE RANGE	CONNECTOR TYPE	
Tension Sleeves	Copper	#8 sol.-500 kcmil
	Aluminum	#6 sol.-954 kcmil
	ACSR	#4 -795 (26/7)
Taps (18/1)	Aluminum	#14-954 ACSR
	ACSR	#6-795 (54/7)
Aerial Cable Connectors	Copper	#6 str.-1500 kcmil
	Aluminum	#4 str.-1000 kcmil
HYGROUND		
Compression Grounding	Copper	#6-500 kcmil 1/2 "-1" ground rods
Code Cable		
Terminals & Splices	Copper	#8-1500 kcmil
	Aluminum	#8-1000 kcmil
Taps	Copper	#14-1000 kcmil
	Aluminum	#14-900 kcmil

### Accessories:

**Cat. No. PT6515**

#### Description

Adapter for use with "U--"die sets.

**Cat. No. PT6547-2**

#### Description

Universal Hot-stick adapter for Y45 HYPRESS tools.

**Cat. No. PT6581**

#### Description

Fiberglass handle adapter for Y45 (10,000 PSI)

**Cat. No. PT6545**

#### Description

Die carrying case for "S-" type dies used with Y45 HYPRESS tools. Holds eight (8) die sets.