

PC 6120

Insulpads Sound Barrier Pads

Duct Seal

Cat. No.	UPC	Size	Std.
68	15250	1/8" X 6" X 8"	100

DESCRIPTION:

Dottie's #68 Insulpads are a heavy, mastic, flexible, non-hardening material that remains pliable as applied or as packaged.

Dottie's #68 Insulpads are supplied on a special silicone-treated release paper.

APPLICATIONS:

Electrical Outlet Boxes, under moldings, around windows, doors, and vents; or wherever metal overlaps metal.

ADVANTAGES:

Can be pressed into any shape to form a watertight and airtight seal.


THE PAD'S FUNCTION:

The pad's function is to both easily seal nail and knock out holes in boxes and to prevent air transmitted sound.

PHYSICAL PROPERTIES OF #68

Color:	Grey
Solids:	100%
Odor:	Slight to nil
Temperature Range:	-20F to 180F*
Cure:	Non-curing
Cohesion:	Good
Flow:	None
Vehicle Base:	Polymers and Butyl Rubber

* Fire Rated products on D10 & D11

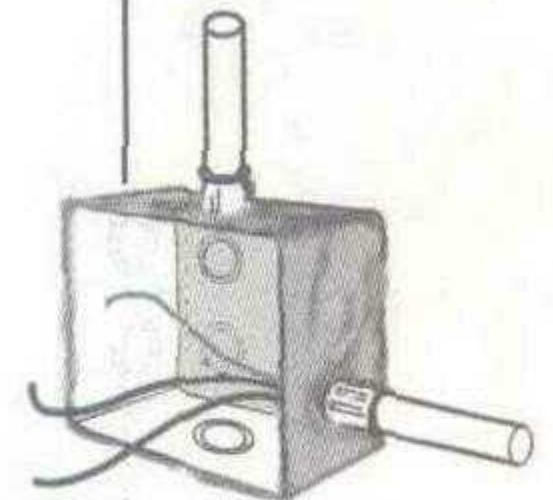

PC 6130

Duct Seal

Prest "O" Seal

Cat. No.	UPC	Size	Std.
LHD-1	17230	1 Pound	50
LHD-5	17235	5 Pounds	10

- Asbestos Free
- Will adhere to most clean surfaces
- Non-Toxic (No adverse effect on human skin)
- Paintable- Easily shaped
- UL Listed
- 1 Year shelf life
- USES: To seal around junction boxes, flashings, service masts, etc.

ELECTRICAL • HEATING • PLUMBING • FABRICATION



L.H. Dottie Co. 6131 S. Garfield Ave. Commerce, CA 90040 (323) 725-1000

D9