

Limit Switches Miniature DIN Models

Contents

Overview	1
Model Selection	2
Specifications	3
Dimensions	3

Cutler-Hammer® E49 DIN Limit Switches by Eaton's electrical business are designed to International standards. Positive opening normally closed contacts, finger-proof wire-ready terminals, double insulated nylon housing, and environmental ratings to NEMA 4, 4X, 6P, 13 — IP65 make E49 the choice in many packaging, material handling, conveying, sorting and counting, positioning and end-of-travel applications.


Ratings and Approvals

- UL Listed
- CSA Certified
- IEC 947-5-1
- VDE 0660
- CENELEC — EN50047
- NEMA A300 (AC-15)
- NEMA R300 (DC-13)
- Direct opening N.C. contacts 
- Double insulated enclosure 



Unless otherwise noted, the products contained in this document are not designed or intended for use in human safety applications.

Miniature, Nonmetallic Limit Switches Feature Positive Opening N.C. Contacts for Reliable Sensing in Space-Restrictive Light Industrial Applications

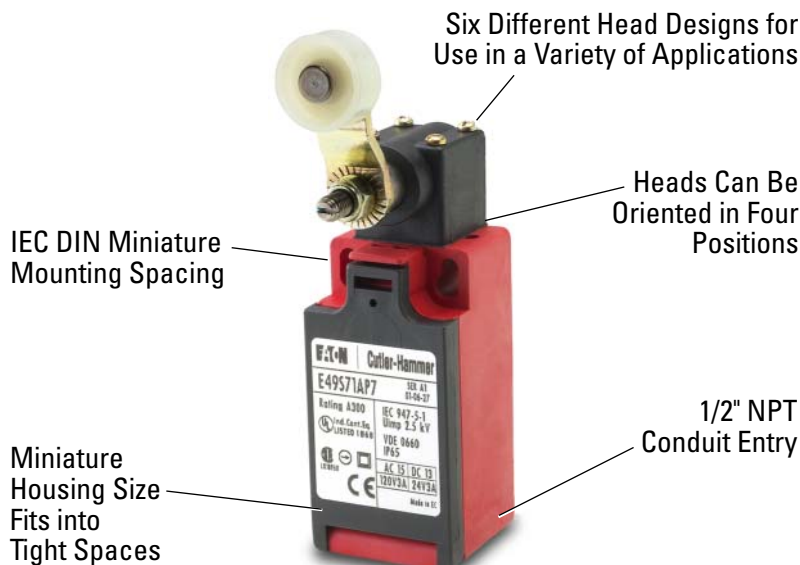

Product Features

- Nonmetallic housing is ideal for corrosive environments
- "Fingerproof" terminals and double insulated enclosures protect against accidental shock
- Generous wiring space speeds installation
- Electrically isolated contacts eliminate polarity restrictions for electrical loads
- Positive opening N.C. contacts improve reliability by positively breaking the N.C. contacts during operation, eliminating light welding/sticking conditions

For Customer Service in the U.S. call **1-800-356-1243**,
in Canada call **1-800-268-3578**.
For Application Assistance in the U.S. and Canada
call **1-800-426-9184**.

July 2005

Model Selection — Miniature Limit Switches




Operating Head Type	Specifications						Catalog Numbers			
	Travel to Operate Contacts	Travel to Operate Pos. Break N.C. Contacts	Travel to Reset Contacts	Total Travel	Force to Operate Contacts (Maximum)	Minimum Return Force	Operating Head Only	Assembled Unit (Switch Body and Head)		
								1N.O.-1N.C. Contacts ^{①②}	2N.O. Contacts ^③	2N.C. Contacts ^③
Side Rotary 	35°	55°	15°	76°	1.16 in-lb	0.76 in-lb	E49AP7	E49S71AP7	E49S74AP7	E49S73AP7
Top Push Plunger 	0.12 in (3.0 mm)	0.19 in (4.8 mm)	0.05 in (1.3 mm)	0.23 in (5.8 mm)	1.79 lb	1.14 lb	—	E49S71	E49S74	E49S73
Top Push Roller 	0.11 in (2.8 mm)	0.19 in (4.8 mm)	0.04 in (1.0 mm)	0.23 in (5.8 mm)	1.81 lb	0.95 lb	E49CP7	E49S71CP7	E49S74CP7	E49S73CP7
Rod Lever ^④ 	35°	55°	16°	76°	0.80 in-lb	0.49 in-lb	E49DP7	E49S71DP7	E49S74DP7	E49S73DP7
Offset Roller Lever 	0.14 in (3.6 mm)	0.12 in (3.0 mm)	0.06 in (1.5 mm)	0.30 in (7.6 mm)	1.7 lb	0.78 lb	E49EP7	E49S71EP7	E49S74EP7	E49S73EP7
Adjustable Roller Lever ^④ 	35°	55°	16°	75°	0.88 in-lb	0.58 in-lb	E49UP7	E49S71UP7	E49S74UP7	E49S73UP7

① 1/2" NPT conduit entry (bottom) supplied as standard for 1N.O.-1N.C. Contacts.

② Switching voltage: 500V, snap action.

③ Switching voltage: 400V, slow make & break.

④ Not rated positive open contact.

Catalog Number — Switch Body Only ^①**E49S71****E49S74****E49S73**

Isolated Contacts —
No Polarity Restriction

Specifications


Mechanical Life	1 million operations
Operating Temperature	-22° to 176°F (-30° to 80°C)
Housing Material	Self-extinguishing PA-6 (Glass-reinforced, Polyamide)

Ratings — Isolated Contacts, No Polarity Restriction


NEMA A300 (AC-15) 50 or 60 Hz						NEMA R300 (DC-13)	
Rated Voltage	Current			Voltamperes		Rated Voltage	Current
	Continuous	Make	Break	Make	Break		
24V AC	10A	60A	6.0A	7200 VA	720 VA	24V DC	1.5A
120V AC	10A	60A	6.0A	7200 VA	720 VA	120V DC	0.22A
240V AC	10A	30A	3.0A	7200 VA	720 VA	240V DC	0.11A
480V AC	10A	15A	1.5A	7200 VA	720 VA		
600V AC	10A	12A	1.2A	7200 VA	720 VA		

Approximate Dimensions in Inches (mm)


Switch Body with E49S71 Top Push Plunger

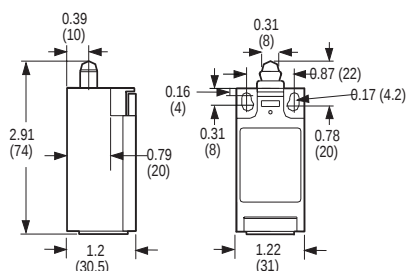


E49AP7 Side Rotary Head

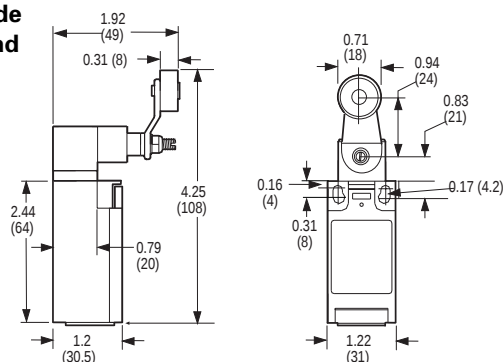


E49DP Rod Lever

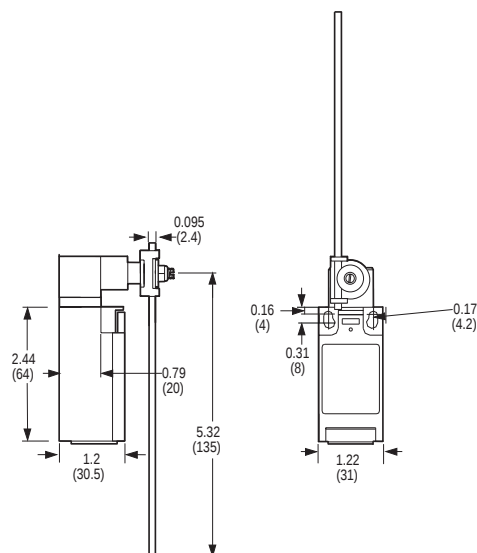

E49UP7 Adjustable Roller Lever

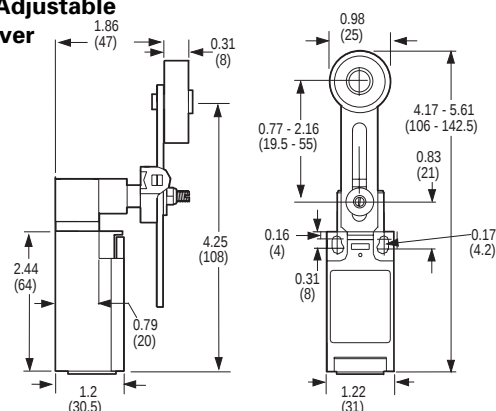

E49CP7 Top Push Roller

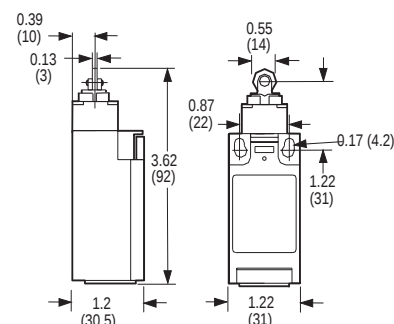

E49EP7 Offset Roller Lever

