
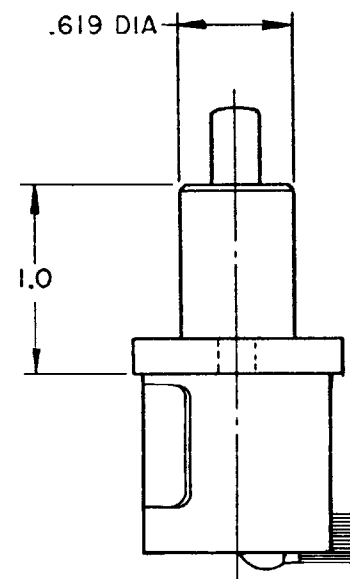
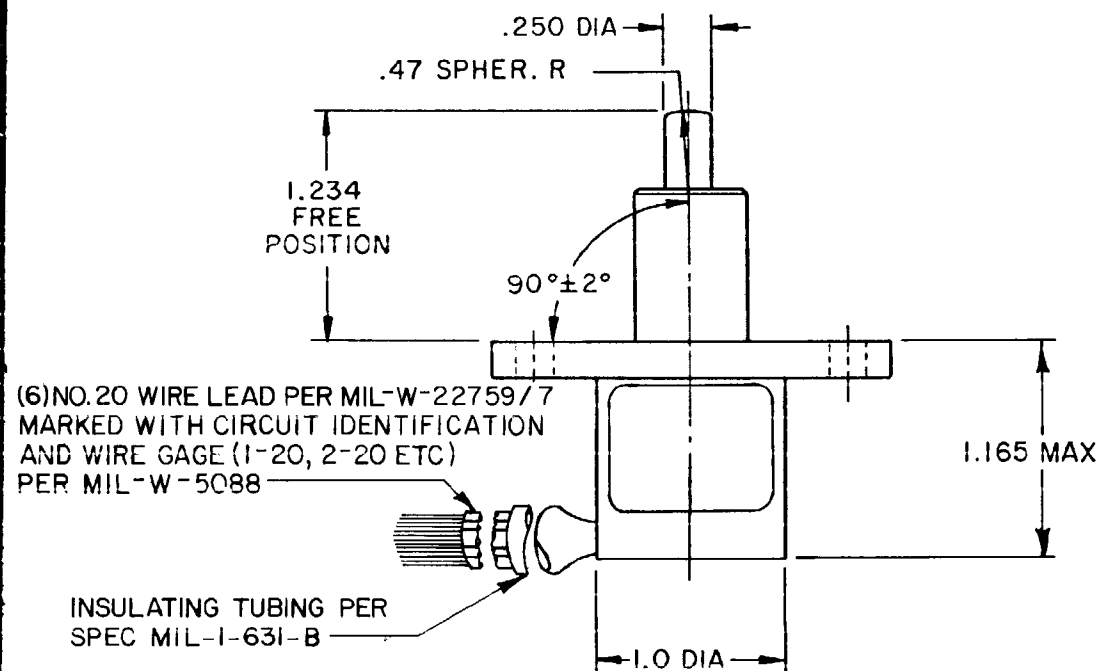
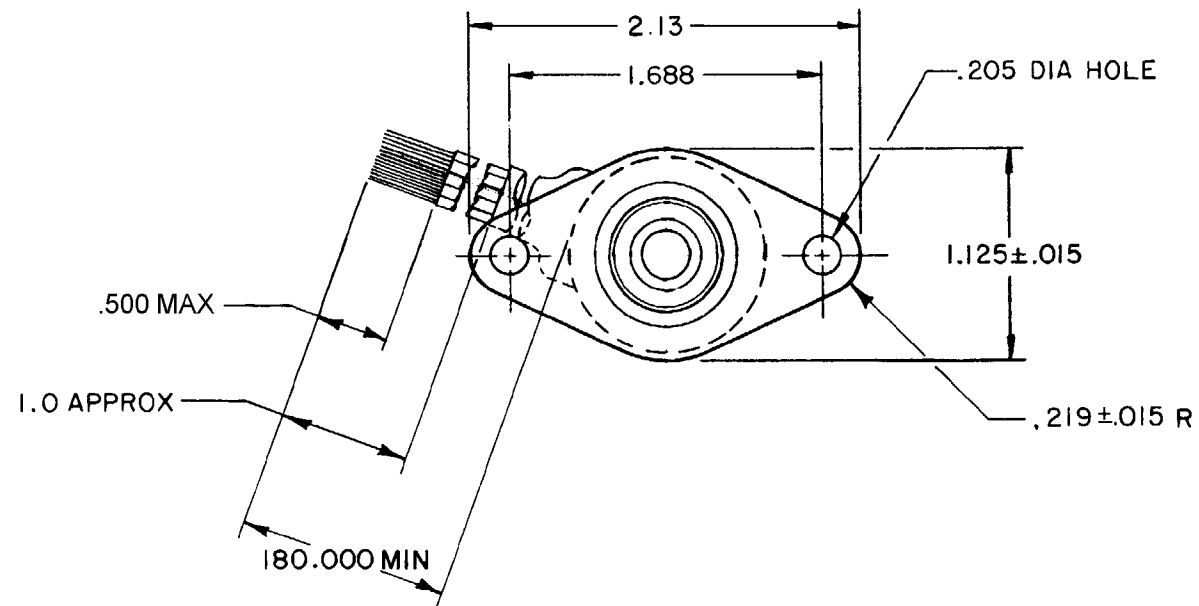




- NOTES
- 1 - CORROSION RESISTANT STEEL ENCLOSURE
 - 2 - SWITCH SEALED PER MIL-PRF-8805 SYMBOL 4
 - 3 - CIRCUIT DIAGRAM, CATALOG LISTING, AND DATE CODE ARE SHOWN ON NAMEPLATE
 - 4 - COINCIDENCE OF OPERATING AND RELEASING POINTS: .010 OF PLUNGER TRAVEL

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS		ELECTRICAL DATA			SCALE FULL	
OPERATING FORCE ----- 6-12 LB		CONTACT ARRANGEMENT			DO NOT SCALE PRINT	
FULL OVERTRAVEL FORCE ----- 30 LB MAX		S P D T (2)				
RELEASE FORCE ----- 4 LB MIN		LOAD	28 VDC		UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES TOLERANCES ARE: ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ±	
PRETRAVEL ----- .040 MAX			SEA LEVEL	50,000 FT.		
DIFFERENTIAL TRAVEL ----- .020 MAX			RES	4		
OVERTRAVEL ----- .250 MIN			IND	2		
			MOTOR	4		
					WEIGHT 19.5 OZ MAX	