MICRO SWITCH FREEPORT, ILLINOIS, U.S.A. A DIVISION OF HONEYWELL FED. MFG. CODE 91929	# SWITCH – ENCLOSED	CATALOG LISTING 204LS1

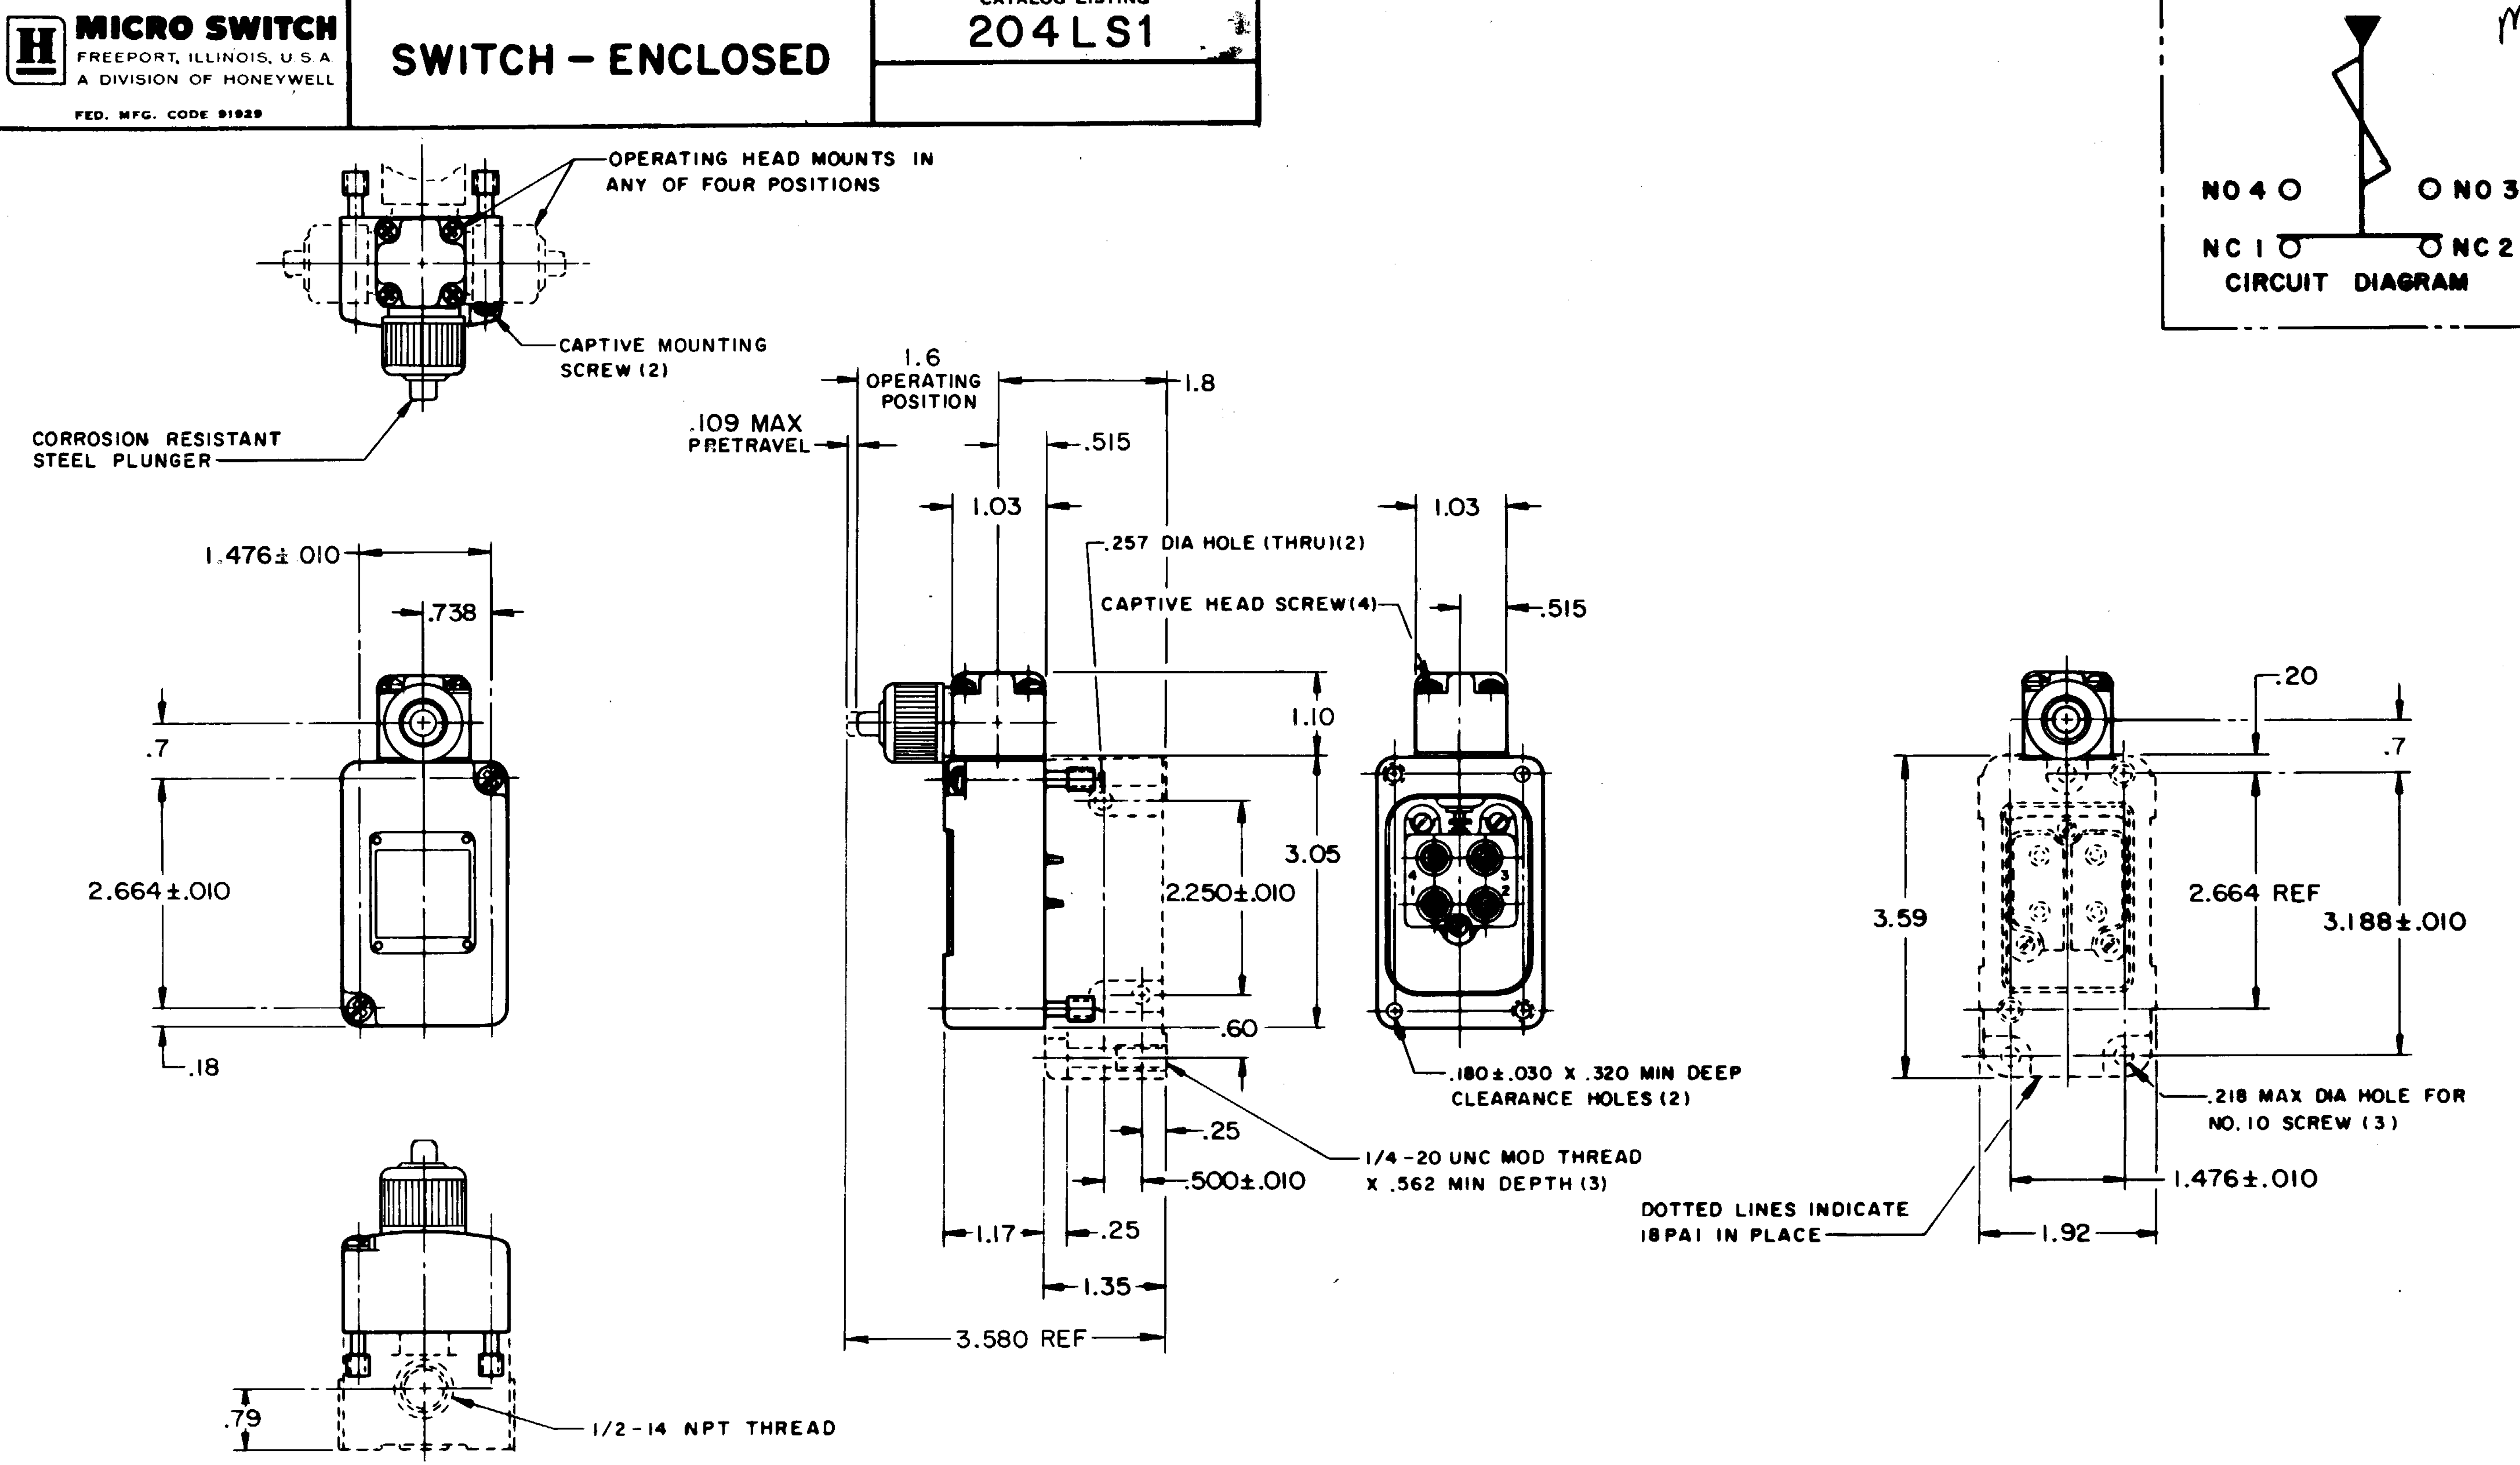

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE 1/2 TO 1
OPERATING FORCE – – – – – – – 9 LB MAX	CONTACT ARRANGEMENT (SEE CIRCUIT DIAGRAM)	DO NOT SCALE PRINT
RELEASE FORCE – – – – – – – – 2 LB MIN	10A-120, 240, OR 480 VAC, 1/3 HP - 120 VAC 3/4 HP - 240 VAC; 0.8A - 115 VDC; 0.4A - 230 VDC .1A - 550 VDC PILOT DUTY: 600 VAC MAX	UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES TOLERANCES ARE: ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ±
DIFFERENTIAL TRAVEL – – – – – .040 MAX		
OVERTRAVEL – – – – – – – – – – .250 MIN		
(B) SWITCH – BASIC REPLACEMENT – – – – – – 2MN9		WEIGHT

REVISIONS		
A	C015200	OMW 22 JUN 65
B	C022566	M B F 20 MAR 67
C	C025152	M B S 24 APR 69
D	C026198	S R H 10 NOV 69
E	C026824	M B S 6 JAN 70
F	CO-77031	J D B 22 DEC 93

DRAWING NUMBER: 204LS1
RELEASE NO.: M
ISSUE: 9
REPLACES
CHECK
DRAWN: O M W 22 JUN 65
PO-50378-003