


CATALOG LISTING
23AT1-T
PAGE 1 OF 1
RELEASE NO. SR 8852
CHECK
REVISIONS
A 0000274
CSL 12 MAY 03
CHECK
12 MAY 03
CHECK
SAV
CHECK
12 MAY 03
DRAWN
CSL 12 MAY 03
RASTER

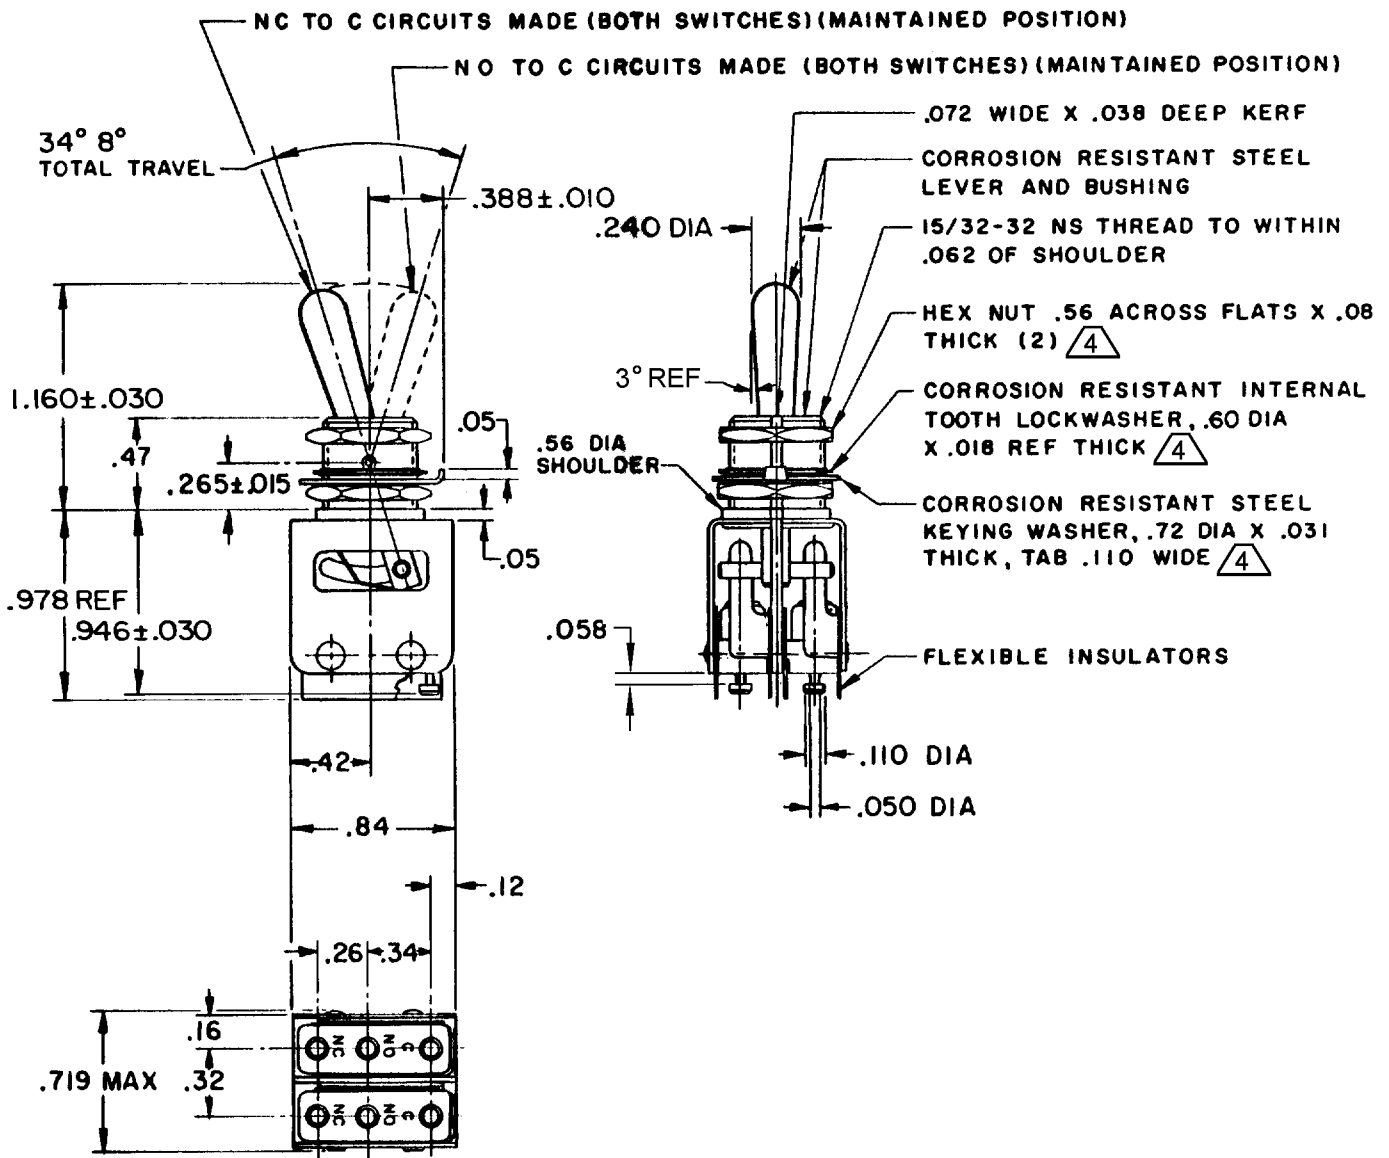


NOTES

- 1 - UNIT INCLUDES CAT. LIST. 1SM1-T BASIC SWITCH (2)
- 2 - TERMINALS ARE PLATED FOR SOLDERING
- 3 - SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY
- 4 HARDWARE FURNISHED ASSEMBLED WITH SWITCH OR IN PACKET PER MIL-PRF-8805
- 5 - REPLACEMENT MOUNTING HARDWARE PACKET 15PA312-AT

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
	CONTACT ARRANGEMENT S P D T (2)	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
	250 VAC 5 AMP	ONE PLACE (.0)	± .030
	30 VOLTS DC RATING	TWO PLACE (.00)	± .015
	INDUCTIVE	THREE PLACE (.000)	± .005
	RESISTIVE	ANGLES	±
	MAXIMUM INRUSH 24 AMP	WEIGHT .06 LB	
	BREAK DISTANCE010 MIN		