MICRO SWITCH
A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
FREEPORT, ILLINOIS
FED. MFR. CODE 91929

ASSEMBLY– TOGGLE SWITCH

CATALOG LISTING
23AT23–T

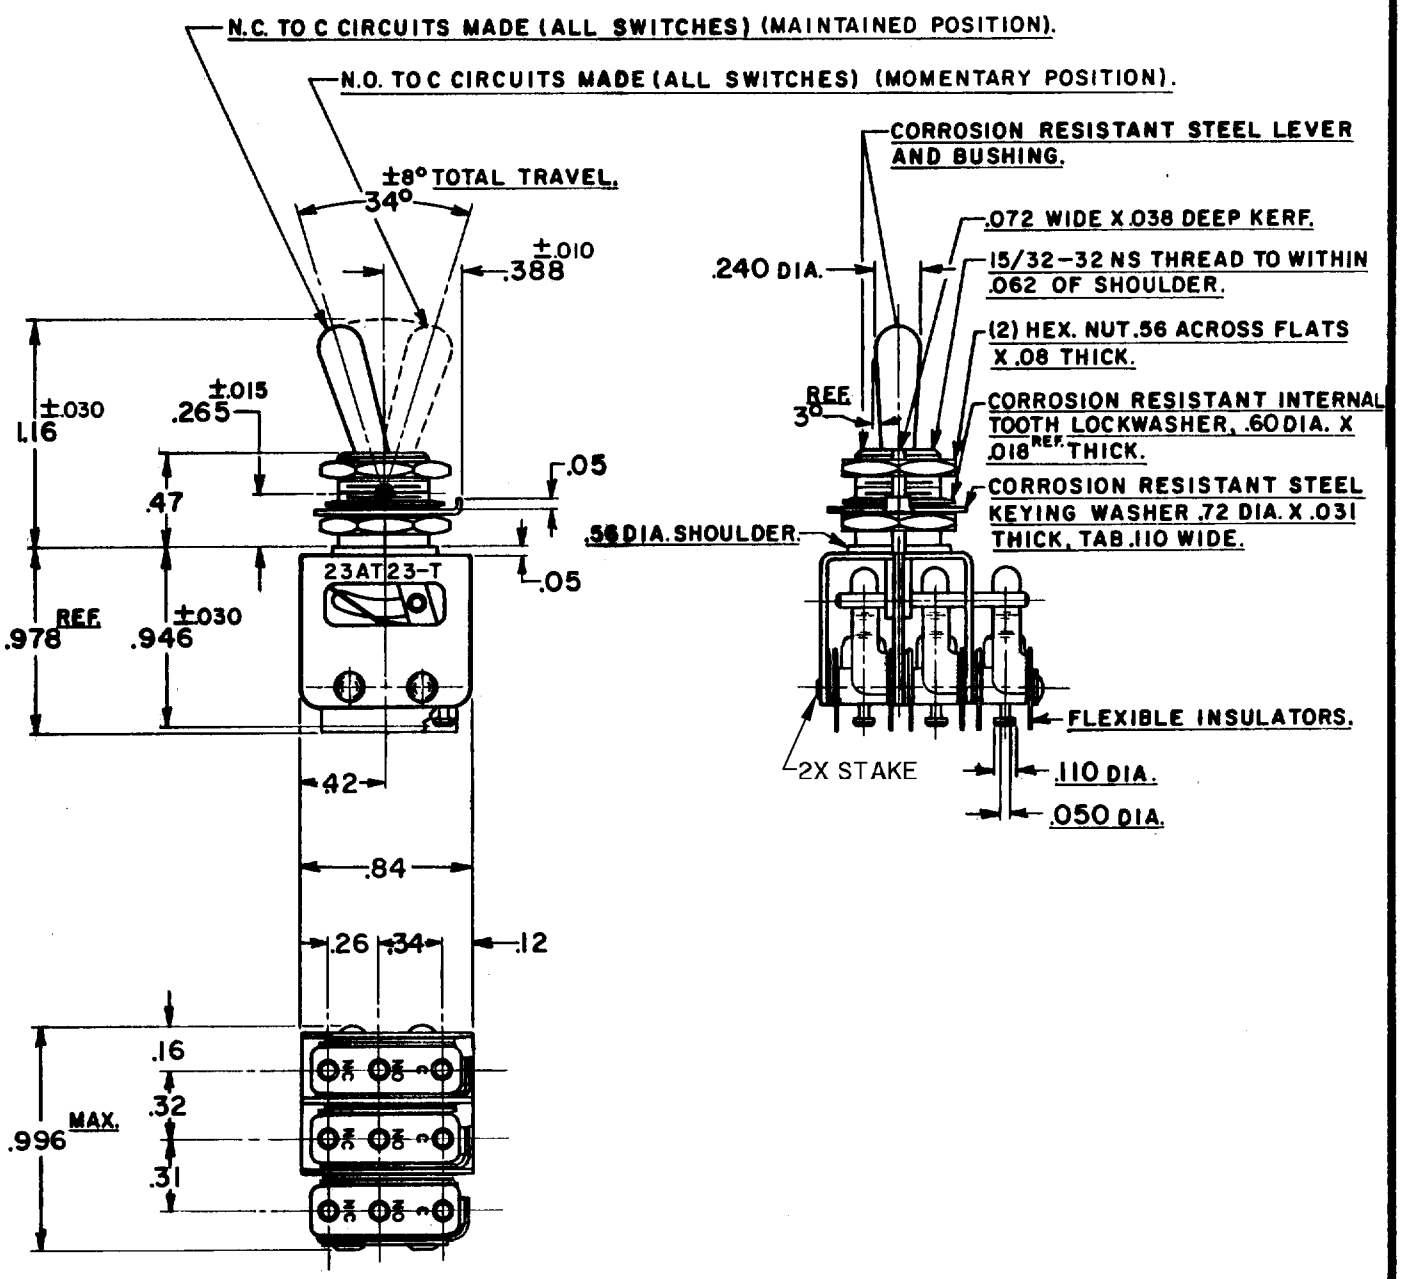

NOTE–
1–UNIT INCLUDES (3) CAT. LIST. 1SM1-T BASIC SWITCHES.
2–SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY.
3–TERMINALS ARE PLATED FOR SOLDERING.

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

ELECTRICAL DATA

CONTACT ARRANGEMENT	BREAK DISTANCE
(3) S. P. D. T.	.010 MIN

30 VOLTS DC RATING

INDUCTIVE	SEA LEVEL	3	AMP
	50,000 FT.	2.5	AMP
(B) RESISTIVE	SEA LEVEL	5	AMP
	50,000 FT.	5	AMP
MAXIMUM INRUSH		24	AMP

SCALE – FULL
DO NOT SCALE PRINT
UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT

CATALOG LISTING 23AT23–T PAGE 1 OF 1 REPLACES

ISSUE	DRAWING NUMBER	RELEASE NO.	DRAWN	CHECK	CHECK	CHECK	CHECK
X	M	S.R. 6810	K.A.F. 5 AUG. 57	W/R D 7 AUG. 57	CNT 6 AUG. 57	GCH 8 AUG. 57	

REVISIONS

A	C013507	MBF 2 APR 59
B	CORR	LSD 15 APR 60
C	CO 50566-B	WJM 6 MAY 82
D	C066089	MAM 25 SEP 90
E	200009	GJW 4 JAN 00

FORMTEK
FO-80378