MICRO SWITCH
FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

ASSEMBLY– TOGGLE SWITCH

CATALOG LISTING
23AT29–S

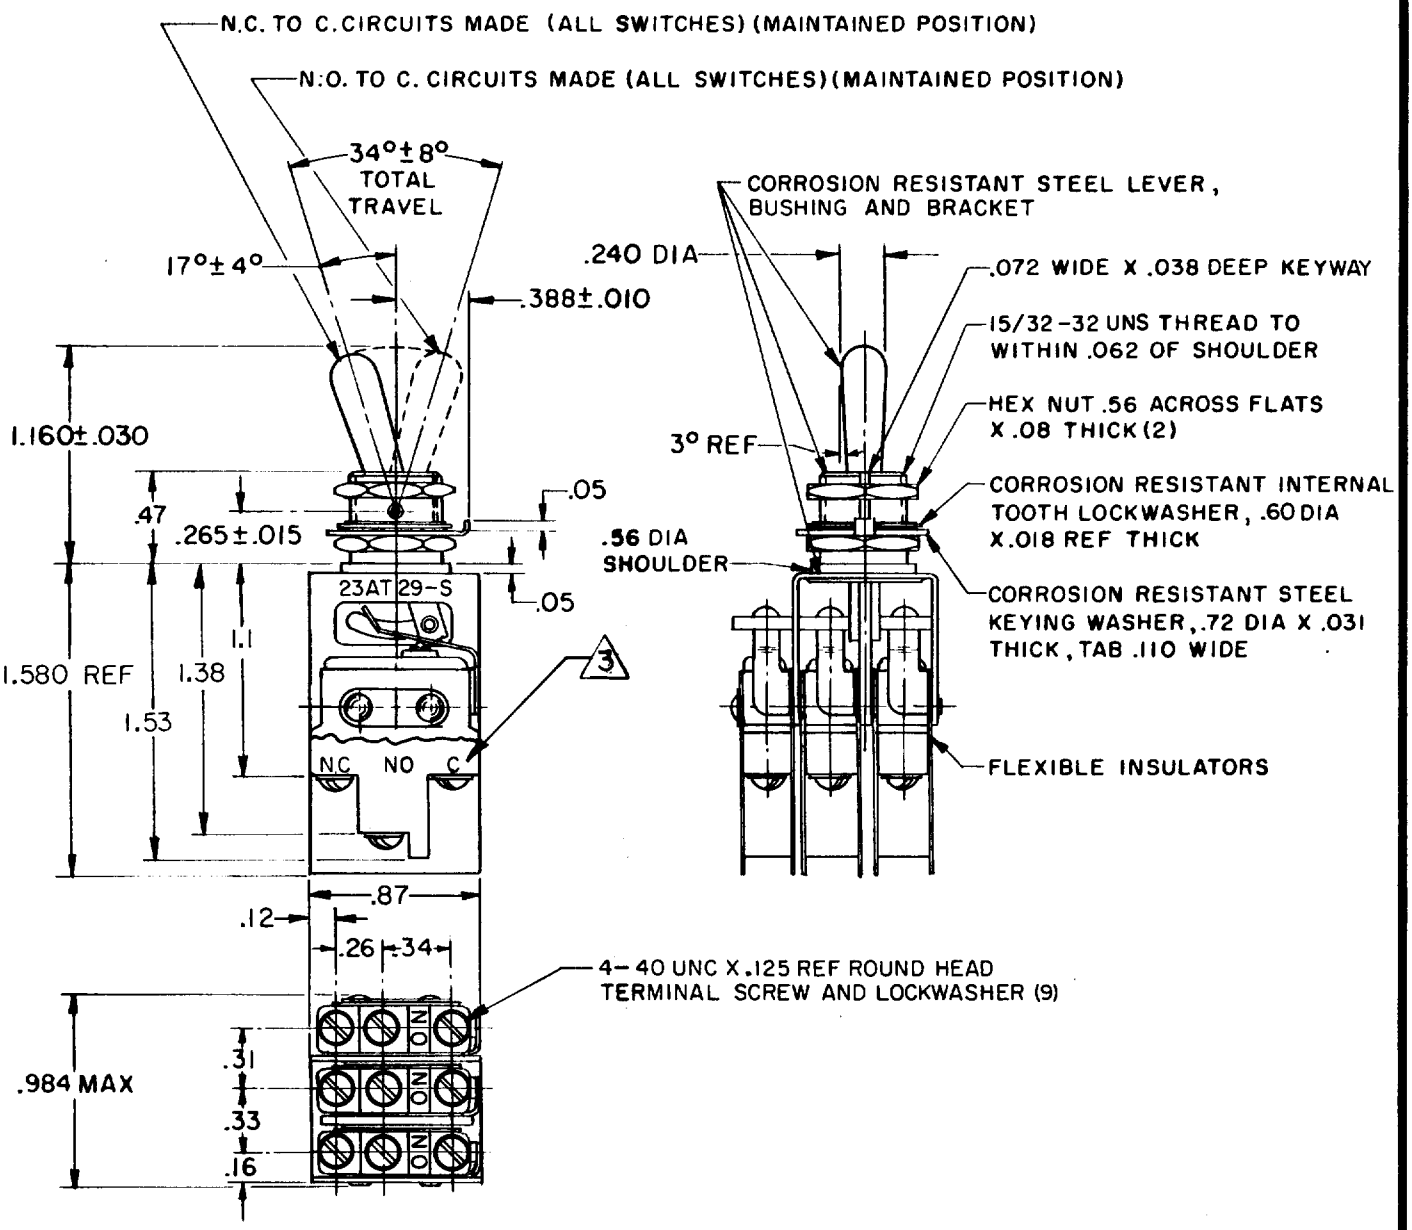

NOTE –
1 – UNIT INCLUDES CAT. LIST. 11SM3–S BASIC SWITCH (3)
2 – SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY
3 – TERMINAL DESIGNATION STAMPED ON SIDE OF SWITCH

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T (3)

250 VAC ---------- 5 AMP
30 VOLTS DC RATING
INDUCTIVE ---- SEA LEVEL -- 3 AMP
50,000 FT -- 2.5 AMP
RESISTIVE ---- SEA LEVEL -- 5 AMP
50,000 FT --- 5 AMP
MAXIMUM INRUSH --------- 24 AMP

SCALE FULL
DO NOT SCALE PRINT
UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE
ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±
WEIGHT .11 LBS MAX

M 23AT29–S
REPLACES
RELEASE NO. PR–3592
DRAWING NUMBER
ISSUE
CHECK
REVISIONS
A CO32990 D B W 4 JAN 74
B CO 47983 S L B 16 AUG 80
C CO 50566-B WJM 6 MAY 82
D CO-64947 DCG 2 MAR 89
E CO 66089 DAW 6 FEB 91
CHECK
CHECK
DRAWN
R E R 25 SEP 73
FO-52848