

ASSEMBLY- TOGGLE SWITCH

CATALOG LISTING
31AT417-T2

31AT417-T2

M

DRAWING
NUMBER

ISSUE

84

84

REPLACES

RELEASE NO. PR-1478

CHECK

REVISIONS

A	CO	50566-B	WJM	10 MAY 82
B	CO	56281	GHW	28 SEP 85
C	CO	66089	DAW	27 FEB 91

CHECK

CHECK

CHECK

CHECK




CHECK

CHECK

CHECK

CHECK

CHECK

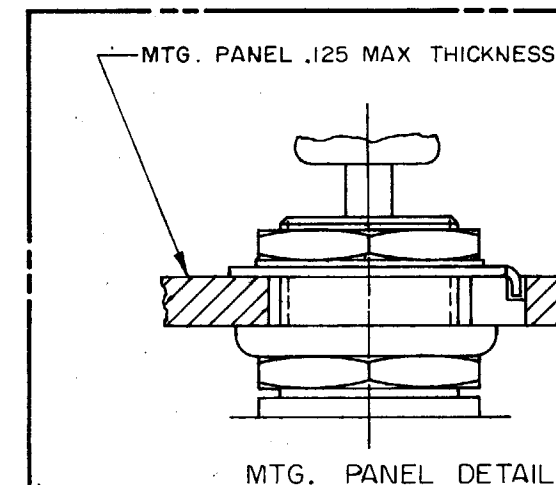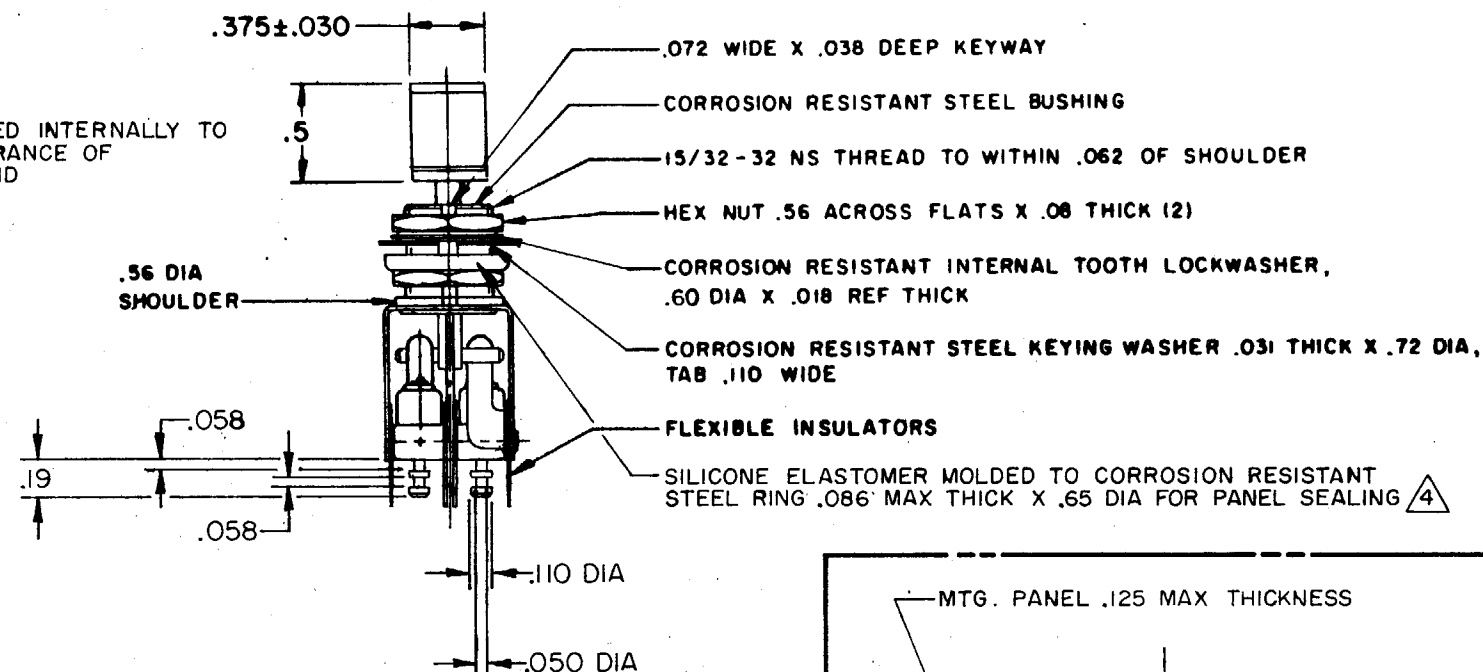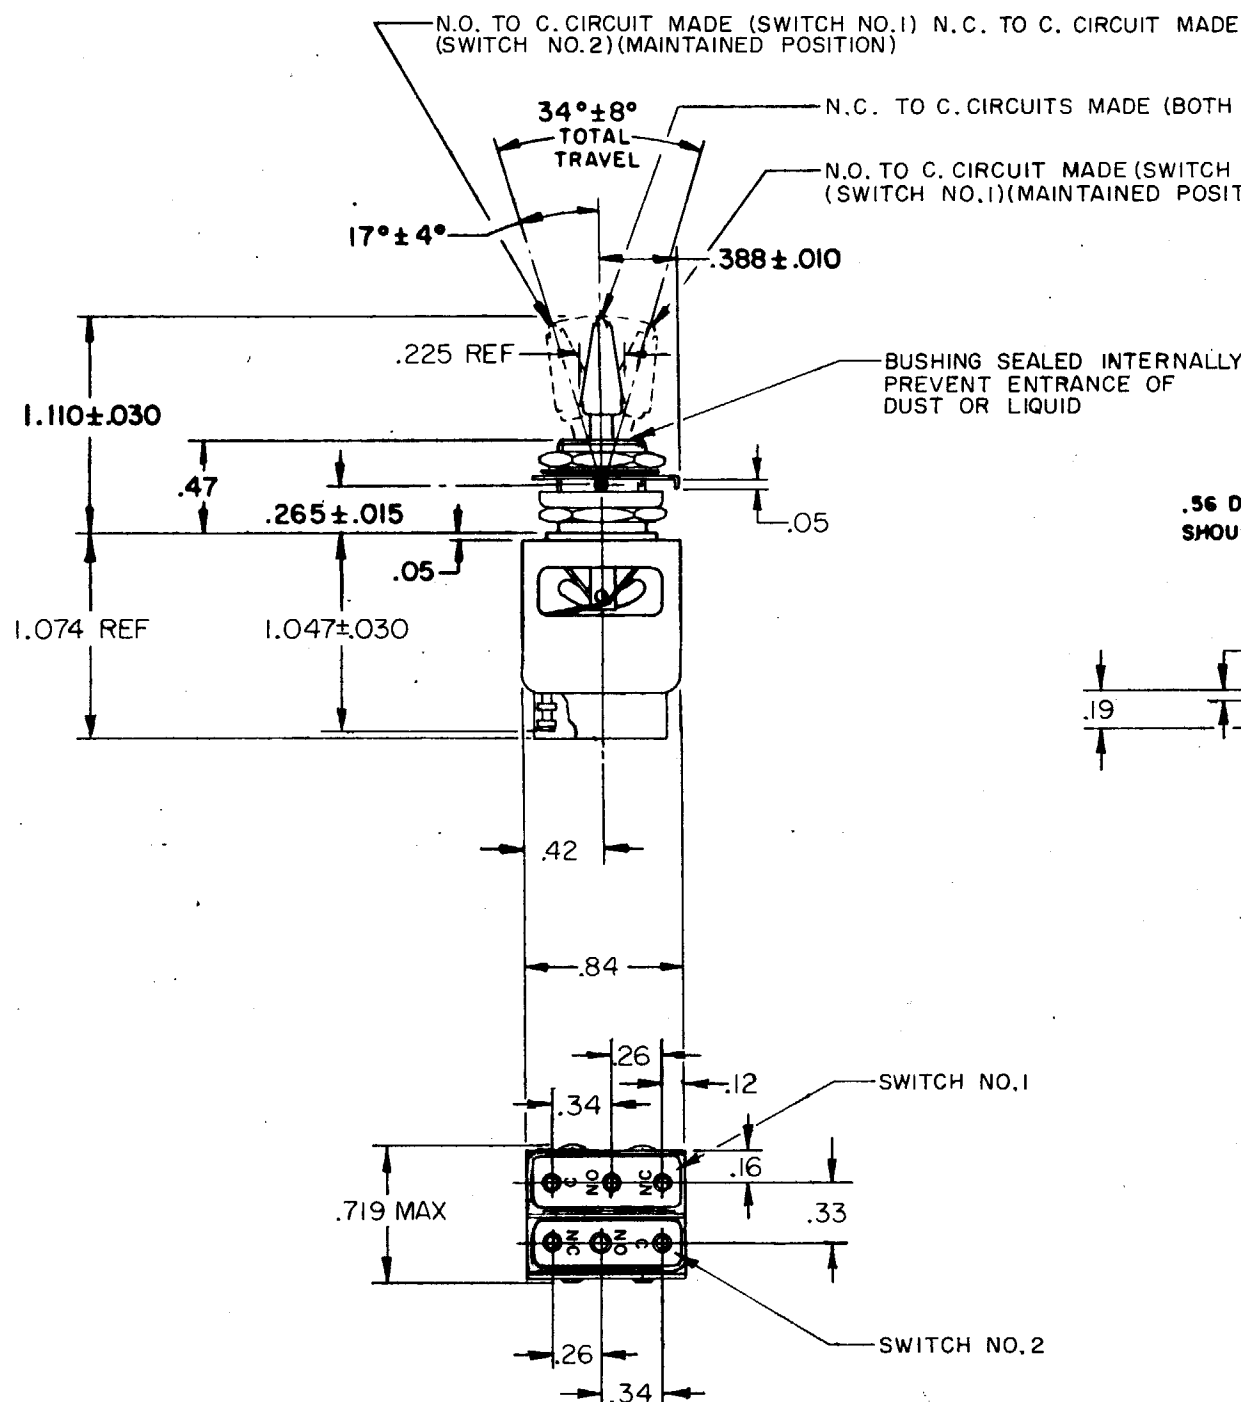

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

ELECTRICAL DATA

SCALE FULL

DO NOT SCALE PRINT

CONTACT ARRANGEMENT
SPDT (2)

250 VAC ----- 5 AMP
30 VOLTS DC RATING
INDUCTIVE ----- SEA LEVEL ----- 3 AMP
50,000 FT ----- 2.5 AMP
RESISTIVE ----- SEA LEVEL ----- 5 AMP
50,000 FT ----- 5 AMP
MAXIMUM INRUSH ----- 24 AMP

UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±

WEIGHT .06 LB APPROX

NOTE-

- 1 - UNIT INCLUDES CAT. LIST. 2ISM284-T2 BASIC SWITCH (2)
- 2 - TERMINALS ARE PLATED FOR SOLDERING
- 3 - KNOB PORTION OF TOGGLE LEVER BRIGHT ANODIZED
- 4 - FOR PANEL SEAL TO BE EFFECTIVE, MTG HOLE IN PANEL SHOULD NOT EXCEED .500 DIA