

CATALOG LISTING

402EN505-1

RELEASE NO. PR-23047

REPLACES

CHECK

ISSUE

2

REVISIONS

A

PR-23047

TSM

15 DEC 97

CHECK

CHECK





DDM/CAD

DRAWN

T S M

15 DEC 97

CHECK

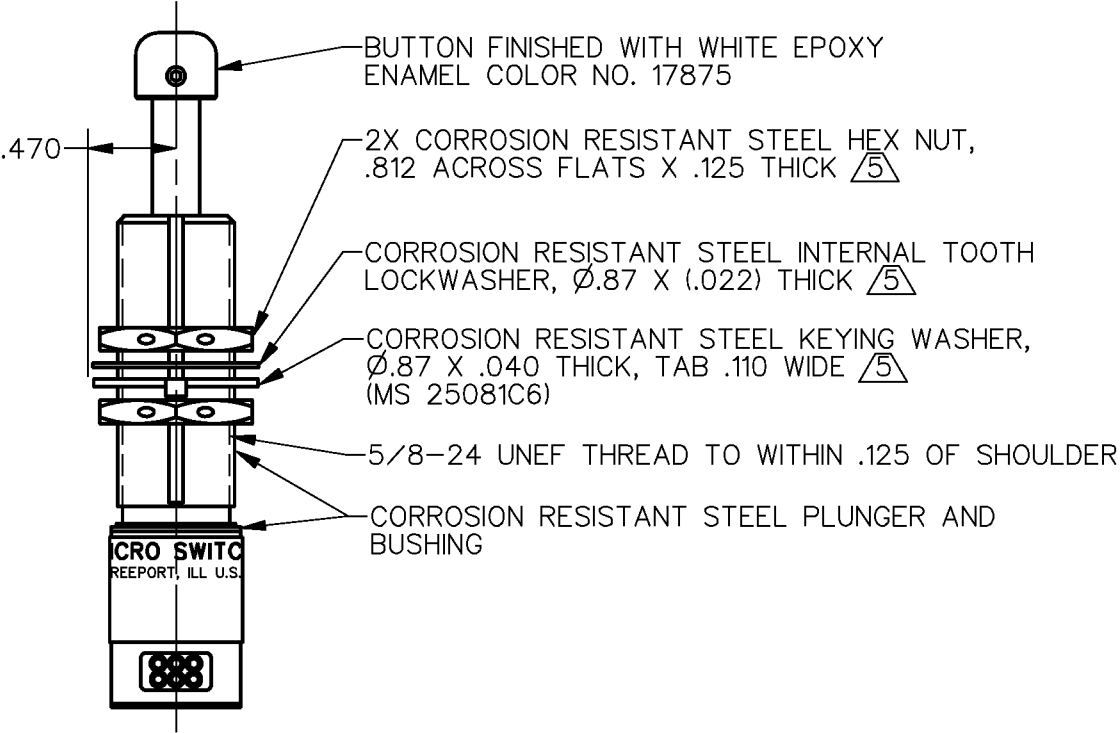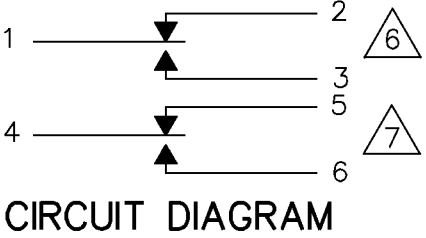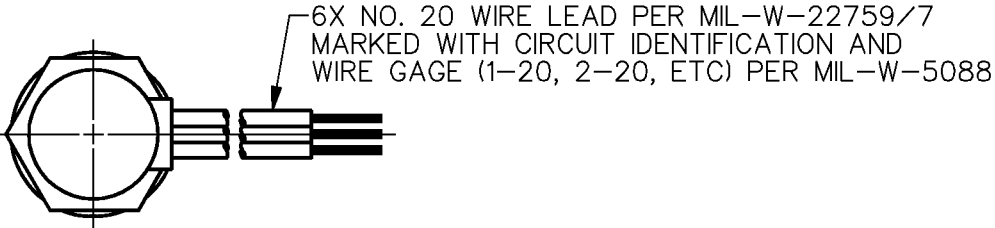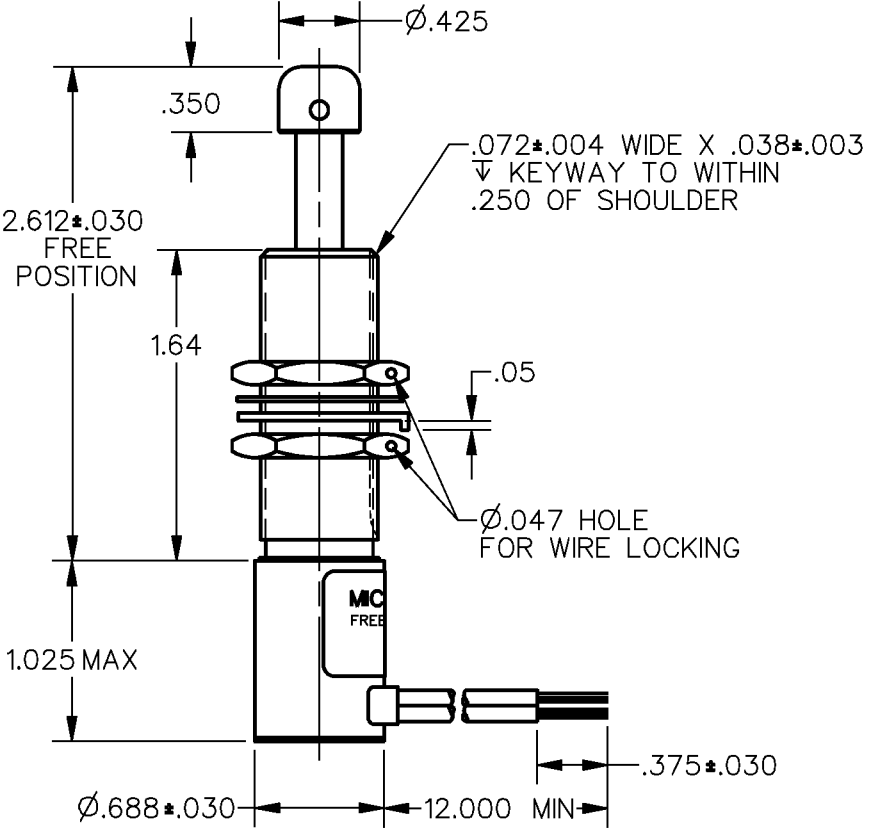

NOTES

1 - CORROSION RESISTANT STEEL ENCLOSURE

2 - SWITCH SEALED PER MIL-S-8805 SYMBOL 4

3 - CIRCUIT DIAGRAM AND CATALOG LISTING ARE SHOWN ON NAMEPLATE

4 - COINCIDENCE OF OPERATING AND RELEASING POINTS: $.010$ OF PLUNGER TRAVEL

5 - HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-S-8805

6 - RATING APPLIES TO CIRCUIT 1-2-3 (GOLD CONTACT BASICS)

7 - RATING APPLIES TO CIRCUIT 4-5-6 (SILVER CONTACT BASICS)

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH				THIRD ANGLE PROJECTION	
CHARACTERISTICS		ELECTRICAL DATA		SCALE FULL	
OPERATING FORCE — — — 3-6 LBS		CONTACT ARRANGEMENT		DO NOT SCALE PRINT	
FULL OVERTRAVEL FORCE --- 17 LBS MAX		2X S P D T		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RELEASE FORCE — — — 2 LBS MIN		28 VDC		ONE PLACE (.) $\pm .030$	
PRETRAVEL — — — .040 MAX		7 SEA LEVEL 6 7 50,000 FT. 6		TWO PLACE (.) $\pm .015$	
DIFFERENTIAL TRAVEL — — .020 MAX		RES 7 1 7 1		THREE PLACE (.) $\pm .005$	
OVERTRAVEL — — — .500 MIN		IND 4 .5 2.5 .5		ANGLES $\pm$	
		MOTOR 4		WEIGHT 3.8 OZ	

ANSI Y14.5M-1982 APPLIES