



CATALOG LISTING
 5XE401-1
 PAGE 1 OF 1
 ISSUE 2
 REVISIONS
 A PR-23776
 TSM
 9 DEC 98
 CHECK
 JAF
 9 DEC 98
 CHECK
 TSM
 9 DEC 98
 FORMTEK
 DRAWN

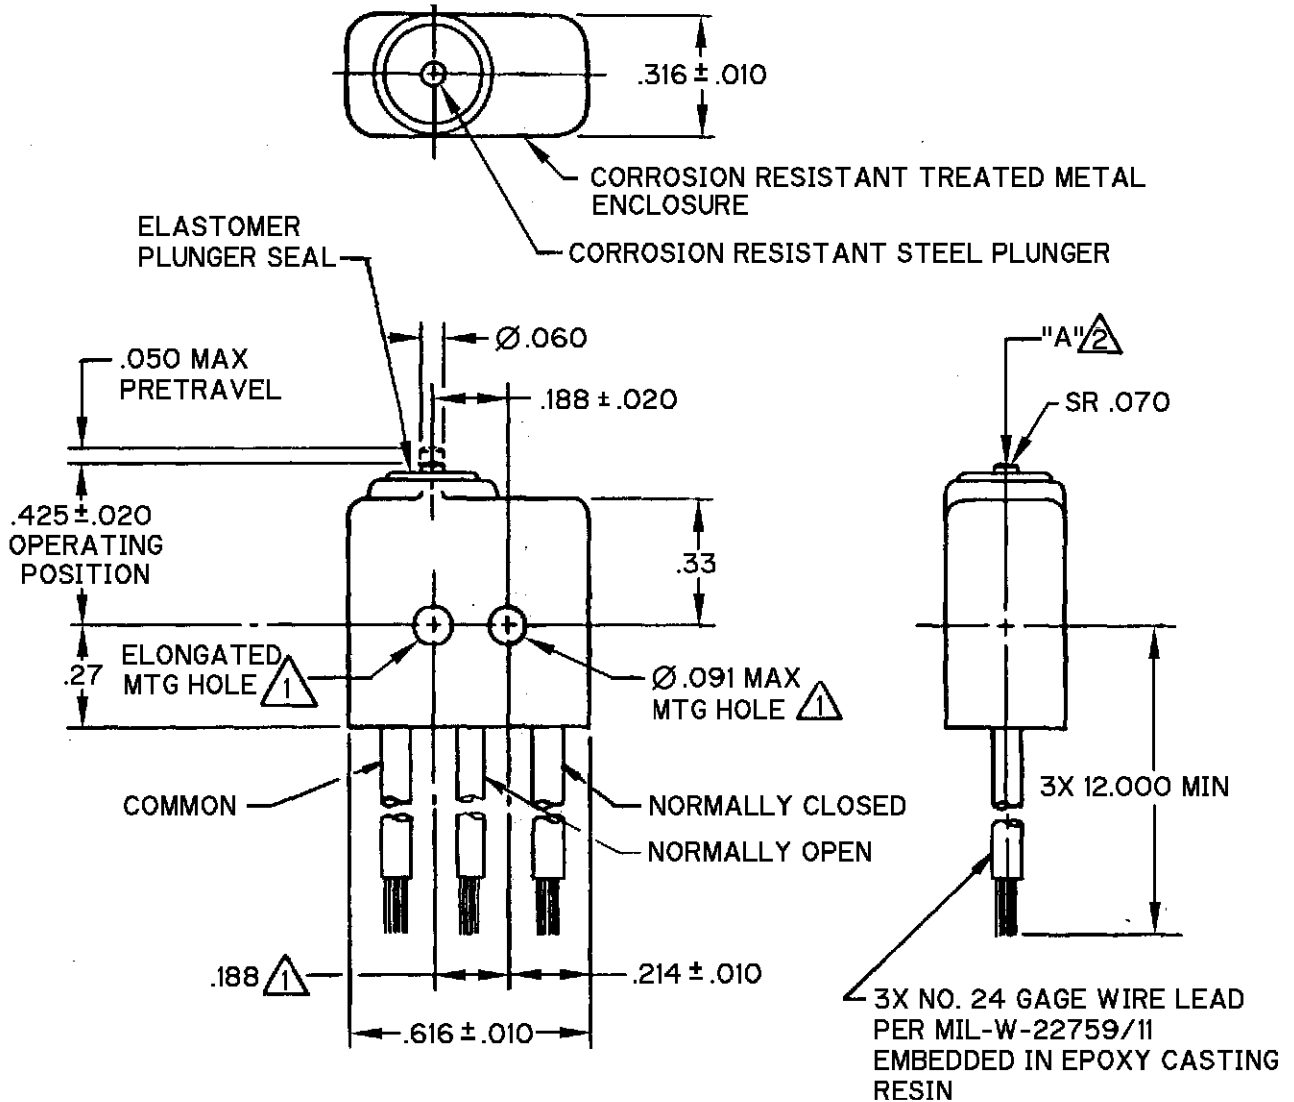

- NOTES**
- 1 MOUNTING HOLES WILL ACCEPT Ø.087 MAX PINS OR SCREWS ON .188 ± .002 CENTERS
 - 2 ACTUATION IN LINE WITH ARROW "A" IS RECOMMENDED
 - 3 WEIGHT OF SWITCH ONLY IS .16 OZ MAX. WEIGHT OF SWITCH WITH WIRE LEADS IS .60 OZ MAX

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.



CHARACTERISTICS	ELECTRICAL DATA	SCALE	DO NOT SCALE PRINT
OPERATING FORCE - - - - - 5-17 OZ	CONTACT ARRANGEMENT S P D T	2:1	
RELEASE FORCE - - - - - 3 OZ MIN	28 VDC	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RELEASE TRAVEL - - - - - .004 MIN	INDUCTIVE - - - SEA LEVEL - - - 0.5 AMP	ONE PLACE (.0) ± .030	
DIFFERENTIAL TRAVEL - - - .005 MAX	RESISTIVE - - - SEA LEVEL - - - 1.0 AMP	TWO PLACE (.00) ± .015	
OVERTRAVEL - - - - - .004 MIN		THREE PLACE (.000) ± .005	
		ANGLES ±	
		WEIGHT 3	