





MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING

602EN550

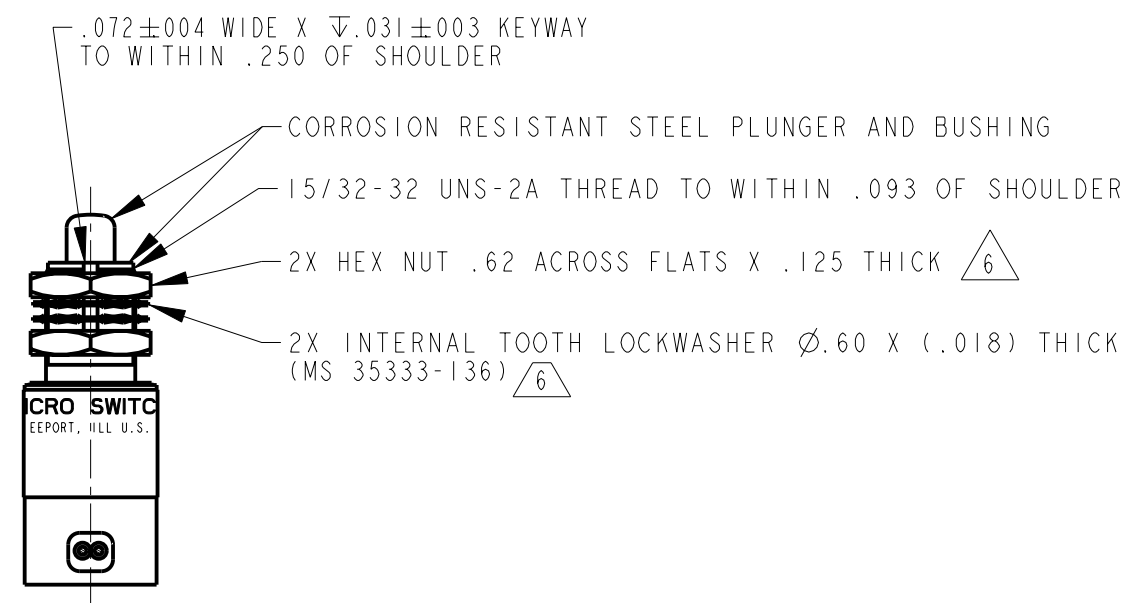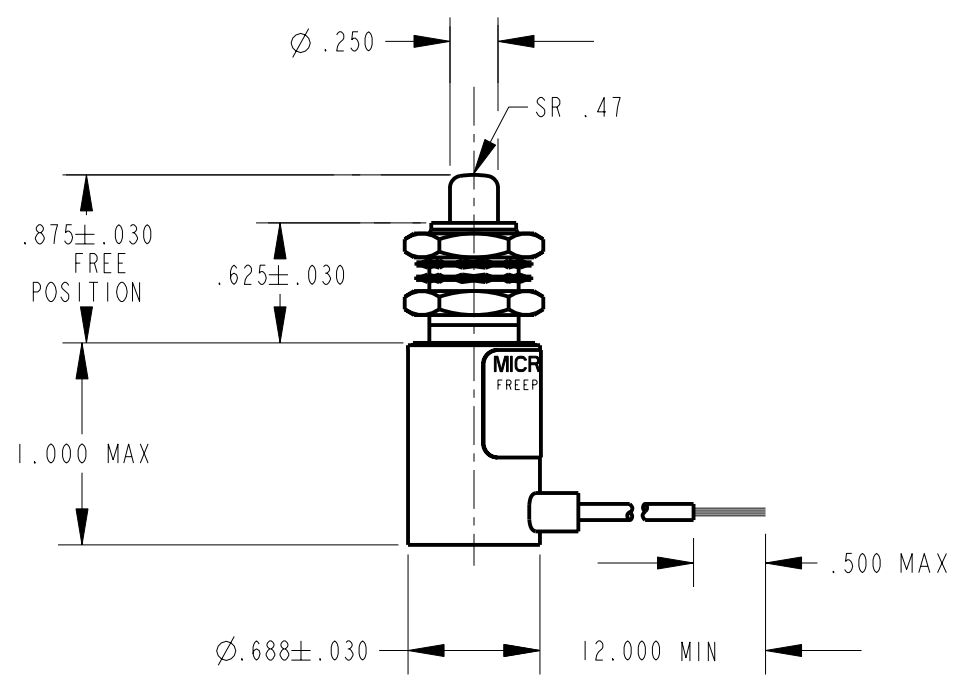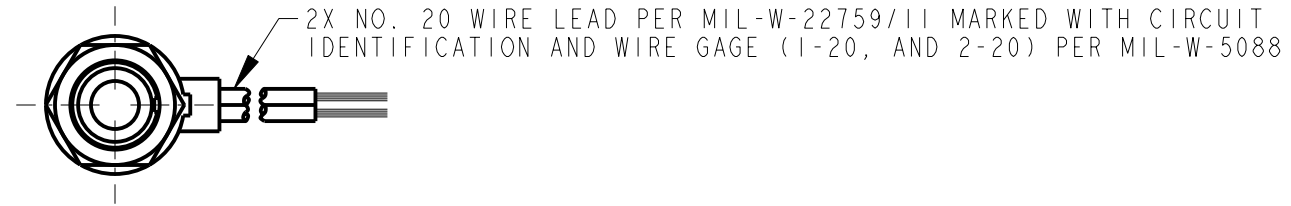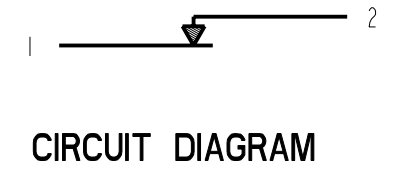

- NOTES
- 1 - CORROSION RESISTANT STEEL ENCLOSURE
 - 2 - SWITCH SEALED PER MIL-PRF-8805 SYMBOL 4
 - 3 - NOTED ELECTRICAL RATINGS APPLY AS SPECIFIED IN MIL-PRF-8805/43 UP TO $+185^{\circ}\text{F}$. MATERIALS OF CONSTRUCTION ARE CAPABLE OF WITHSTANDING -67°F . TO $+250^{\circ}\text{F}$.
 - 4 - CIRCUIT DIAGRAM, DATE CODE, FED. MFG. CODE AND CATALOG LISTING ARE SHOWN ON NAMEPLATE
 - 5 - ALL SOLDER UNIONS ARE WITH SN10 SOLDER
 - 6 - HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-PRF-8805
 - 7 - THIS CATALOG LISTING MUST CONFORM TO PARKER HANNIFIN DWG #2493188, REV G

CATALOG LISTING
602EN550
 PAGE 1 OF 1
 RELEASE NO. PR-21793
 REPLACES -
 ISSUE 7
 CHECK
 REVISIONS
 A 204911
 GRT 15 FEB 02
 CHECK
 15 FEB 02
 SAV
 CHECK
 15 FEB 02
 DRAWN
 PTC/CAD 2D
 GRT 15 FEB 02

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CHARACTERISTICS		ELECTRICAL DATA	
OPERATING FORCE	----- 3 - 6 LB	CONTACT ARRANGEMENT	
FULL OVERTRAVEL FORCE	-- 17 LBS MAX	S P N C	
RELEASE FORCE	----- 2 LB MIN	LOAD	28 VDC
PRETRAVEL	----- .040 MAX	SEA LEVEL	50,000 FT.
DIFFERENTIAL TRAVEL	----- .020 MAX	RES	7
OVERTRAVEL	----- .125 MIN	IND	4
		MOTOR	4
		LAMP	

THIRD ANGLE PROJECTION	
SCALE	FULL
DO NOT SCALE PRINT	
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
ONE PLACE	(.0) $\pm .030$
TWO PLACE	(.00) $\pm .015$
THREE PLACE	(.000) $\pm .005$
ANGLES	\pm
WEIGHT	2.5 OZ MAX

ANSI Y14.5M-1982 APPLIES