MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

SWITCH CLOSED

CATALOG LISTING
622EN226-6

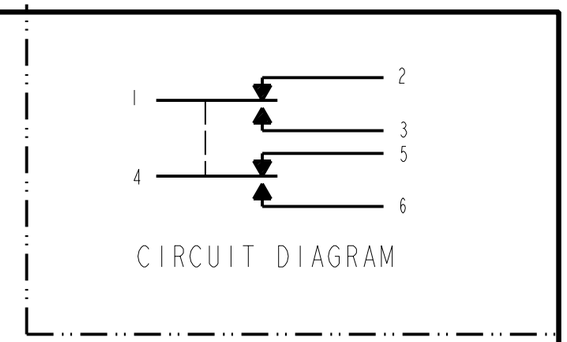

CIRCUIT DIAGRAM

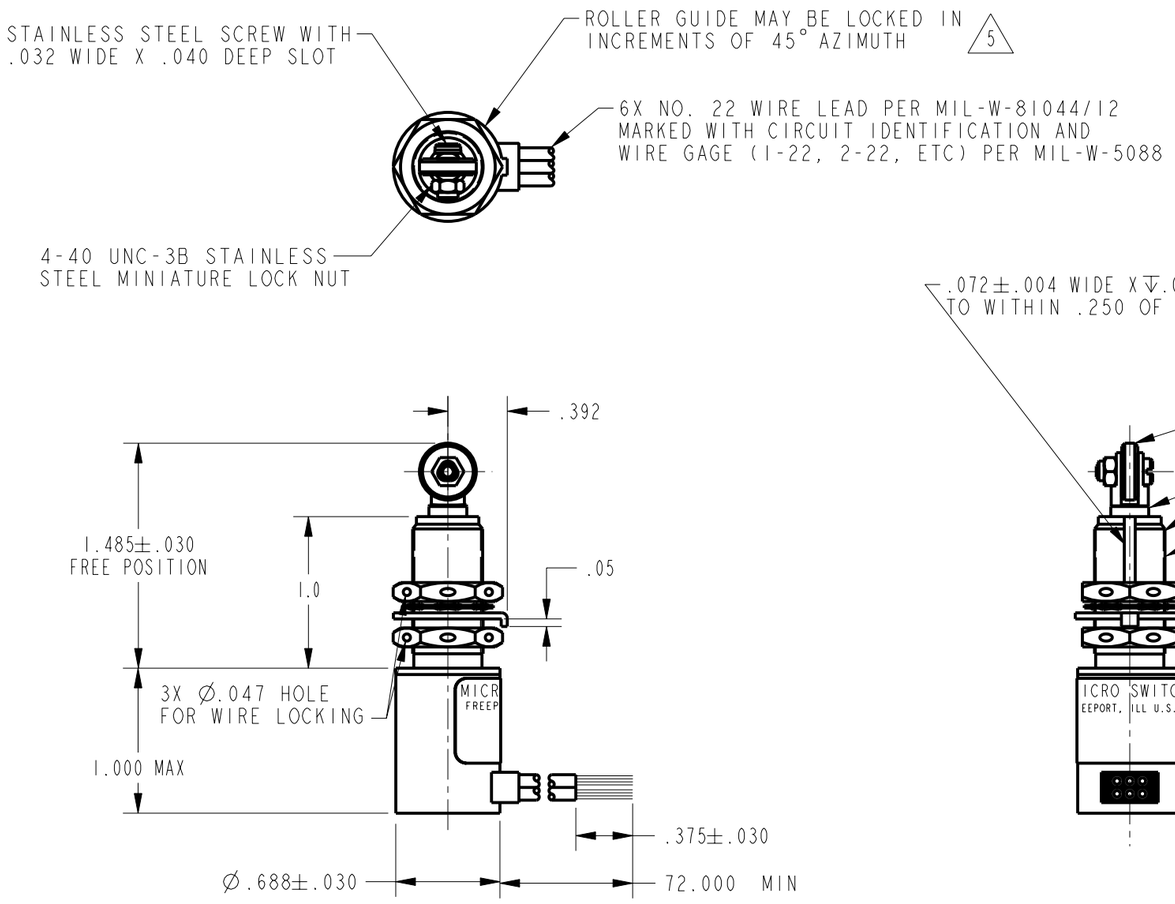

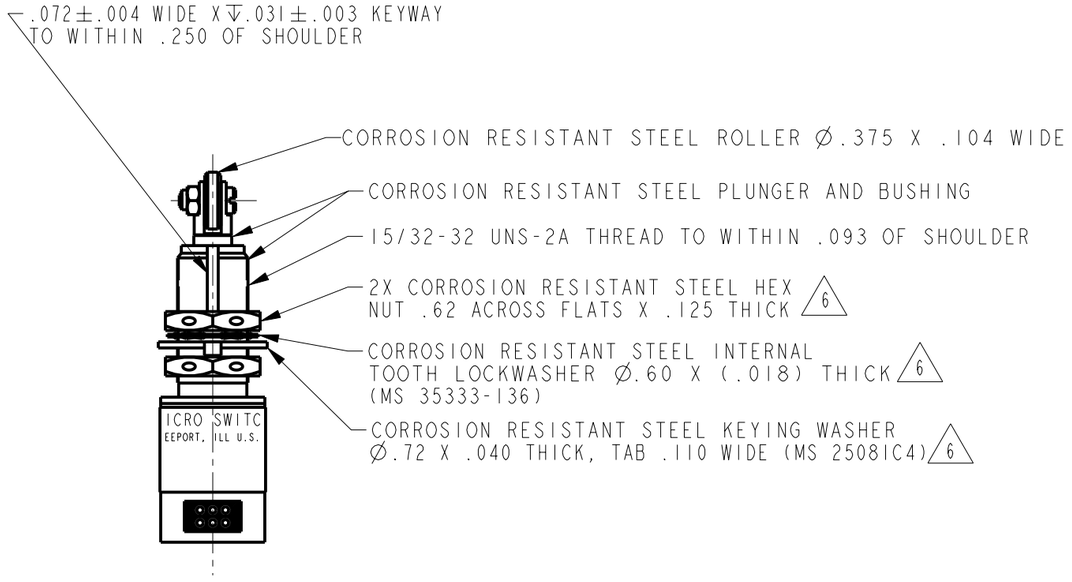

NOTES
1 - CORROSION RESISTANT STEEL ENCLOSURE
2 - SWITCH SEALED PER MIL-S-8805 SYMBOL 4
3 - COINCIDENCE OF OPERATING AND RELEASING POINTS:.010 OF PLUNGER TRAVEL
4 - CIRCUIT DIAGRAM AND CATALOG LISTING SHOWN ON LABEL
5 - TO ADJUST ROLLER DIRECTION, REMOVE LOCK NUT, SCREW AND ROLLER. DEPRESS PLUNGER UNTIL IT CAN BE ROTATED TO DESIRED POSITION. RETURN PLUNGER TO FREE POSITION AND REASSEMBLE ROLLER
6 - HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-S-8805
7 - GOLD BIFURCATED CONTACTS

CHARACTERISTICS	
OPERATING FORCE	6 -12 LB
FULL OVERTRAVEL FORCE	30 LB MAX
RELEASE FORCE	4 LB MIN
PRETRAVEL	.040 MAX
DIFFERENTIAL TRAVEL	.020 MAX
OVERTRAVEL	.125 MIN

ELECTRICAL DATA

7 CONTACT ARRANGEMENT: 2X S P D T

LOAD	28 VDC	
	SEA LEVEL	50,000 FT.
RES	1	1
IND	0.5	0.5

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT 8.0 OZ MAX

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CATALOG LISTING 622EN226-6 | ISSUE 4 | PAGE 1 OF 1 | RELEASE NO. PR-22794 | REPLACES

REVISIONS

A	201300	GJW 26 SEP 00

DRAWN	CHECK	CHECK	CHECK
GJW 26 SEP 00	SAV 26 SEP 00		PTC/CAD 2D