

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
FREEPORT, ILLINOIS

FED. MFR. CODE 91929

ASSEMBLY- TOGGLE SWITCH

CATALOG LISTING

6ATI

(M) 6ATI

REPLACES ISSUE II

6ATI

M

DRAWING
NUMBER

ISSUE

16

RELEASE NO.

1 OCT 55

4.77

CHECK

16

CHECK

16

CHECK

16

CHECK

16

CHECK

16

CHECK

16

CHECK

16

CHECK

16

CHECK

16

CHECK

16

CHECK

16

CHECK


16

CHECK

16

CHECK

16

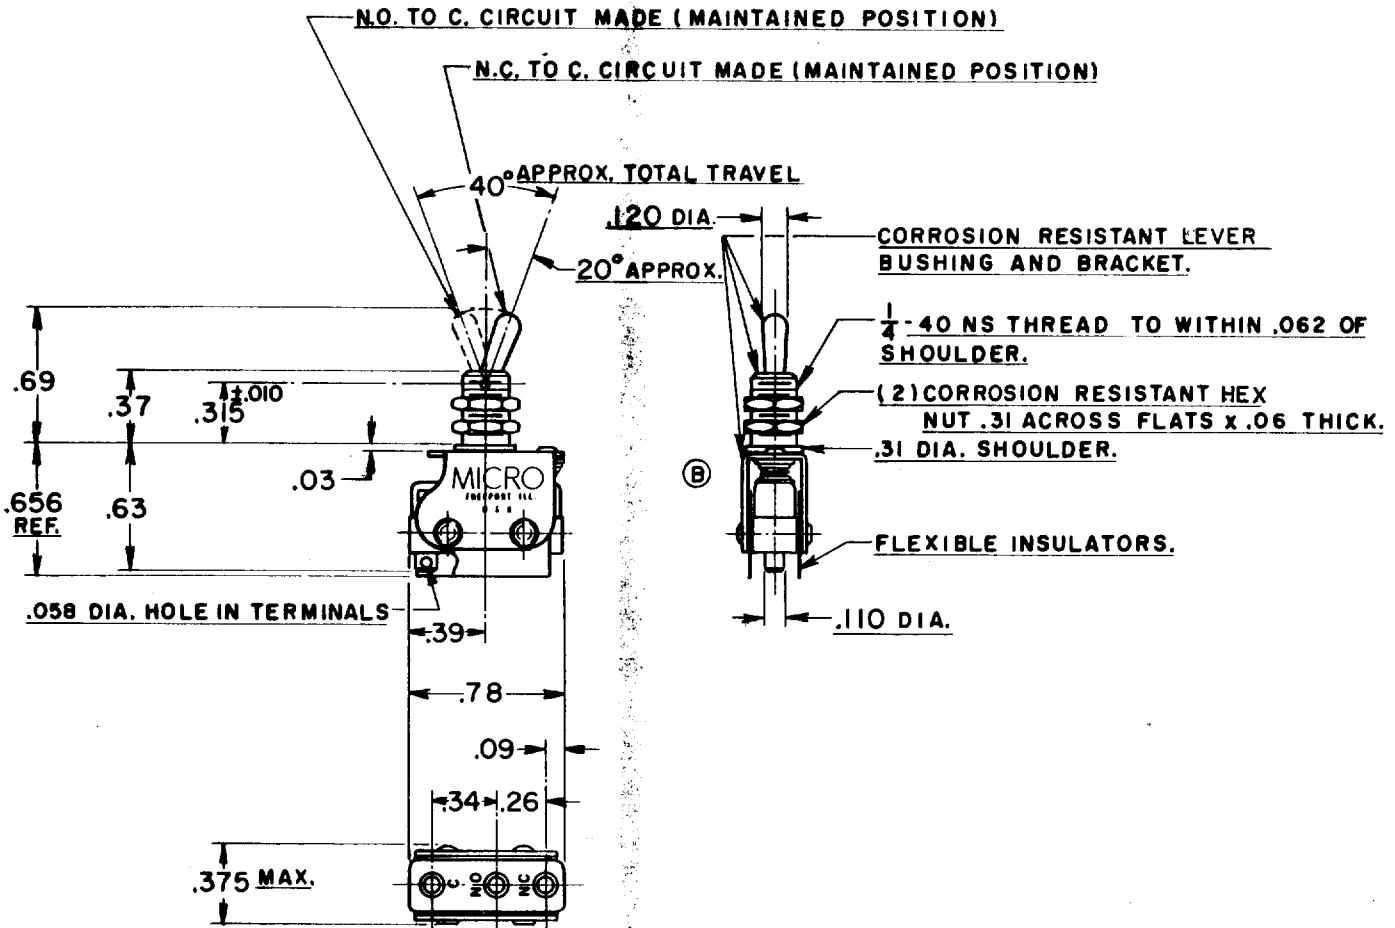

NOTE-

- 1-UNIT INCLUDES (1) CAT. LIST. 11SM106 BASIC SWITCH,
- 2-TERMINALS ARE PLATED FOR SOLDERING.

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

ELECTRICAL DATA

SCALE FULL

CONTACT ARRANGEMENT
S. P. D. T.

BREAK DISTANCE
.010 MIN.

DO NOT SCALE PRINT

250 VAC ————— 5 AMP

30 VOLTS DC RATING

INDUCTIVE ——— SEA LEVEL ——— 3 AMP
50,000 FT. ——— 2.5 AMP

RESISTIVE ——— SEA LEVEL ——— 5 AMP
50,000 FT. ——— 5 AMP

© MAXIMUM INRUSH ————— 24 AMP

UNLESS OTHERWISE
SPECIFIED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±

WEIGHT ——.018 LB.

DRAWN

74-88

R. L. Z. 22 SEPT 55