MICRO SWITCH
a Honeywell Division
FED.MFG.CODE 91929

SWITCH – BASIC

CATALOG LISTING
9HM30NH–REL–PGM

RELIABILITY PROGRAM

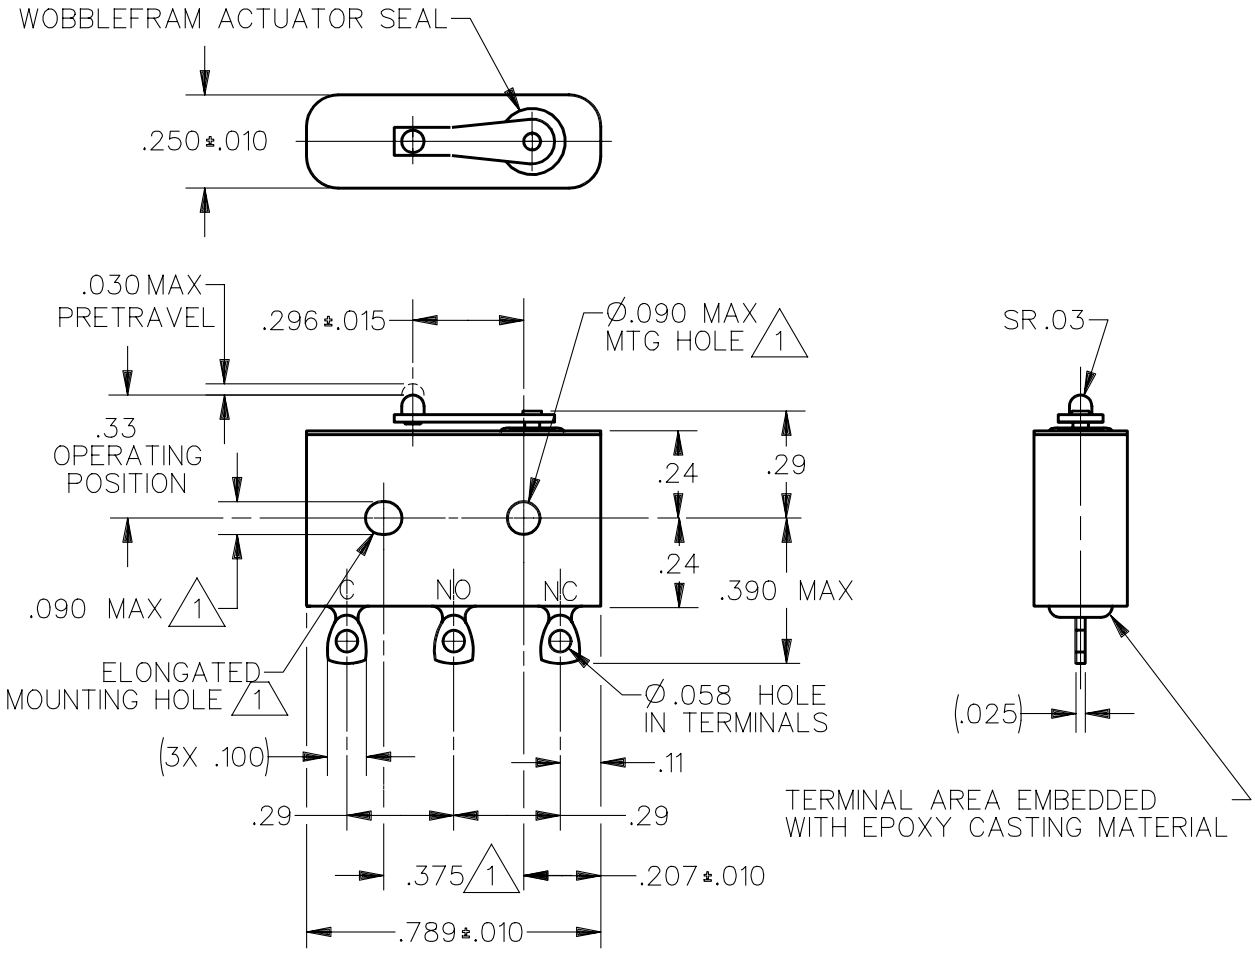

NOTES
1. MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF Ø.087 MAX ON .375±.002 CENTERS
2 – FOR USE IN TEMPERATURE RANGE –300°F TO +250°F
3 – HERMETICALLY SEALED (METAL–TO–METAL, GLASS–TO–METAL)
4 – ALL EXPOSED PARTS ARE OF CORROSION RESISTANT MATERIALS
5 – TERMINALS ARE TINNED FOR SOLDERING
6 – DO NOT APPLY MORE THAN 1 1/2 INCH–LBS OF TORQUE WHEN TIGHTENING MOUNTING SCREWS
7 – 24K GOLD MOVABLE CONTACT
8 – GOLD ALLOY STATIONARY CONTACTS
9 – SPECIAL 90/10 NITROGEN/HELIUM FILL GAS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS	ELECTRICAL DATA	SCALE 2 : 1 — DO NOT SCALE PRINT
OPERATING FORCE — — — — 7 OZ MAX	CONTACT ARRANGEMENT S P D T	**UNLESS OTHERWISE SPECIFIED TOLERANCES ARE**
RELEASE FORCE — — — — — 1 OZ MIN		ONE PLACE (.0) ±.030
DIFFERENTIAL TRAVEL — — — .006 MAX	28 VOLTS DC RATING	TWO PLACE (.00) ±.015
OVERTRAVEL — — — — — — .003 MIN	INDUCTIVE--SEA LEVEL-- 1/4 AMP 70,000 FT-- 1/4 AMP RESISTIVE--SEA LEVEL-- 1/2 AMP 70,000 FT-- 1/2 AMP	THREE PLACE (.000) ±.005 ANGLES ±
		WEIGHT .014 LB MAX

CATALOG LISTING 9HM30NH–REL–PGM
PAGE 1 OF 1
RELEASE NO. PR–21868
REPLACES
ISSUE 1
CHECK
REVISIONS
CHECK
CHECK
DRAWN M A M 18 OCT 95
DDM/CAD