

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

BZ-R55511-A4

CATALOG LISTING
BZ-R55511-A4
PAGE 1 OF 1
RELEASE NO. PR-10454
REPLACES

M
DRAWING
NUMBER
5

ISSUE


REVISEMENTS

A C067209
JAP
3 MAY 90
B C073287-6
JAT
20 OCT 93
C C077588
KDR
29 MAR 94
D 206008
CSL
16 JUL 02

CHECK

FO-52848-A
DRAWN
T M M 6 AUG 81
CHECKED
D W
AUG 81

RASTER

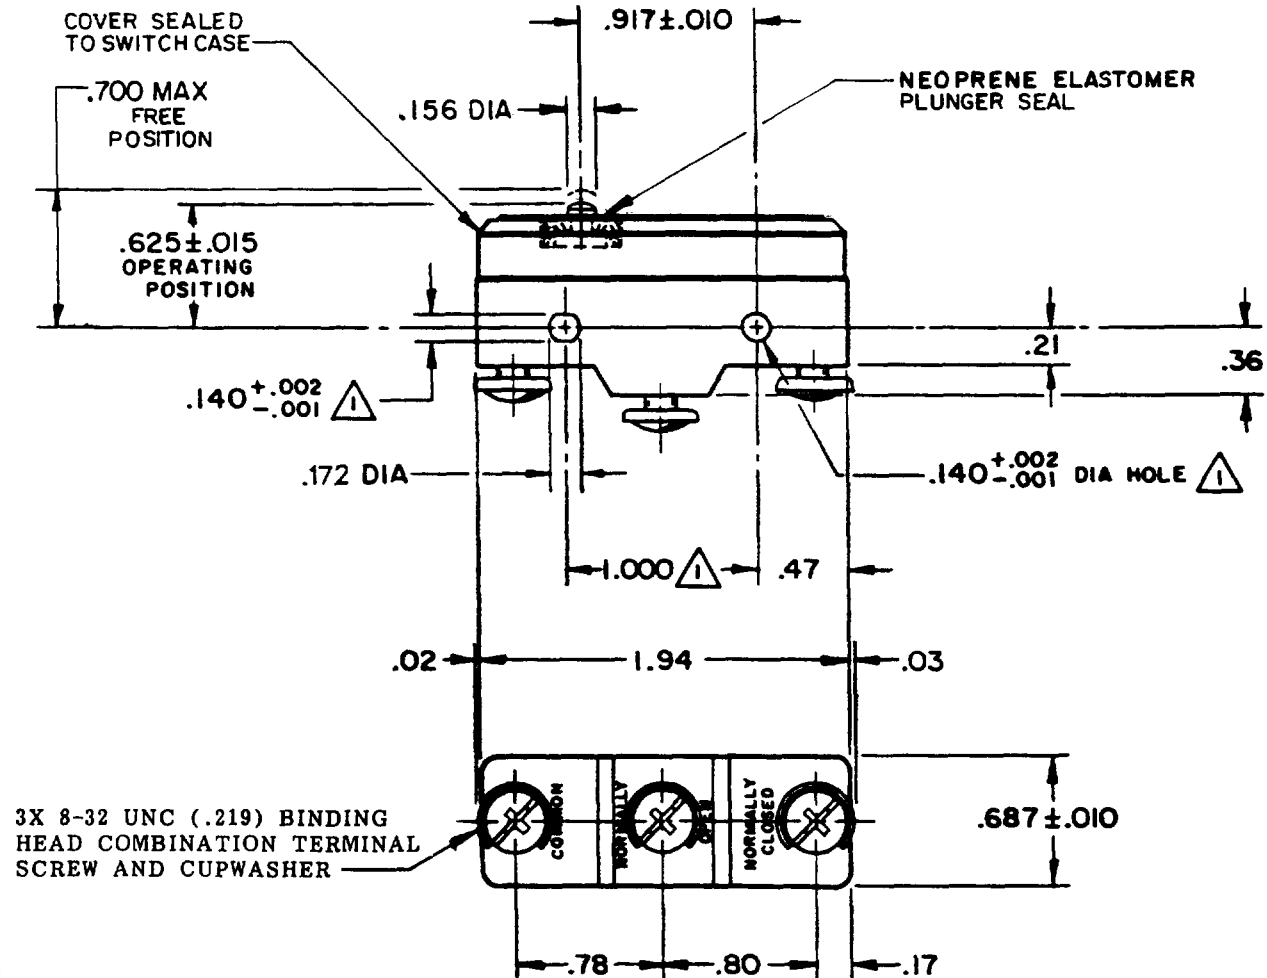


NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000±.002 CENTERS
- 2 SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE — — — 7-12 OZ

DIFFERENTIAL FORCE — — 1/2-1 1/4 OZ

DIFFERENTIAL TRAVEL — — .001 MAX

OVERTRAVEL — — — .005 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L103

15A 125, 250 OR 480 VAC
1/8HP 125 VAC, 1/4HP 250 VAC



SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE:

	DES. UNITS	TOL. mils	DES. IN	TOL. mils
NO PLACES	IN	1/100	IN	0.0100
ONE PLACE	IN	0.00010	IN	0.00010
TWO PLACES	IN	0.000010	IN	0.000010
THREE PLACES	IN	0.0000010	IN	0.0000010

DESIGN UNITS ☐ METRIC ☒ US CUSTOMARY

WEIGHT .074 LB