

**MICRO SWITCH**  
a Honeywell Division

FED. MFG. CODE 91 929

SWITCH - BASIC

CATALOG LISTING

V7-2S27P07-201

CW-B8713


CATALOG LISTING  
V7-2S27P07-201  
PAGE 1 OF 1

REPLACES  
RELEASE NO. PR-21653


ISSUE  
3

REVISIONS	
A	REL PR21653 DCS 26 APR 95
B	CO-93311 TSM 26 OCT 98



CORROSION RESISTANT  
STEEL ACTUATOR

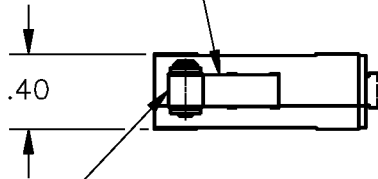

∅ .19 X .19 WIDE OIL BRONZE ROLLER  
(CONCENTRICITY .005 FIM)



TERMINATION PATTERN

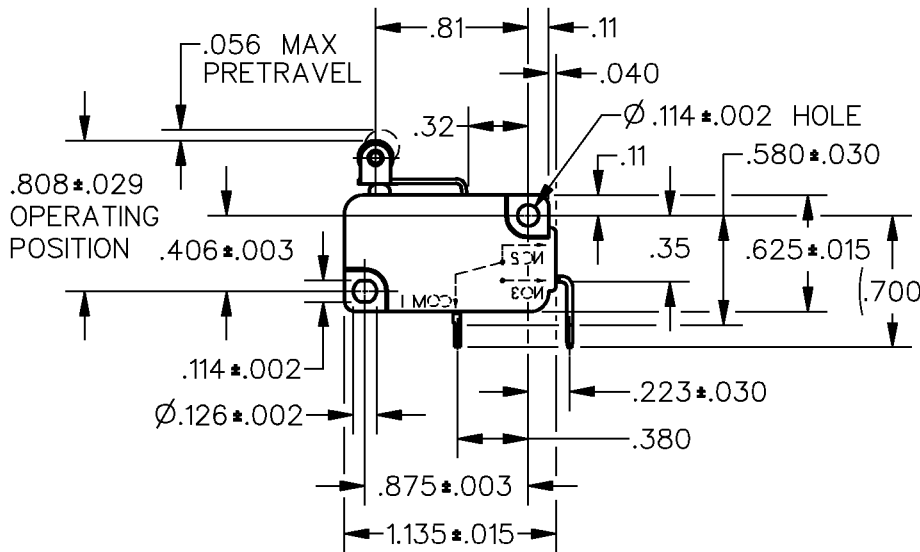


NOTES

- 1 - TERMINATION MAY REQUIRE STUFFING INTO BOARD
- 2 - IN INSPECTION, DO NOT BURN OUT - GOLD CONTACTS
- 3 - IN INSPECTION, DO NOT EXCEED 10 VDC, .1A RESISTIVE LOAD

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
		<p>OPERATING FORCE --- 88 GRAMS MAX</p> <p>RELEASE FORCE --- 7 GRAMS MIN</p> <p>DIFFERENTIAL TRAVEL --- .013 MAX</p> <p>OVERTRAVEL --- .034 MIN</p> <p>RELEASE TRAVEL --- .007 MIN</p>	
		<p>UNLESS OTHERWISE SPECIFIED TOLERANCES ARE</p> <p>ONE PLACE (.0) ±.030</p> <p>TWO PLACE (.00) ±.015</p> <p>THREE PLACE (.000) ±.005</p> <p>ANGLES ±</p>	
		WEIGHT	



FORMTEK

DRAWN

6 JAN 95 CHECK