




HUBBELL HiImpact[™] TRUKTRAK[®] and TREDTRAK[®] Modular Cable Protection Systems

Modular Interlocking Design.

Supports Both Power and Communications.

Weather Resistant.

Supports Heavy Loads.

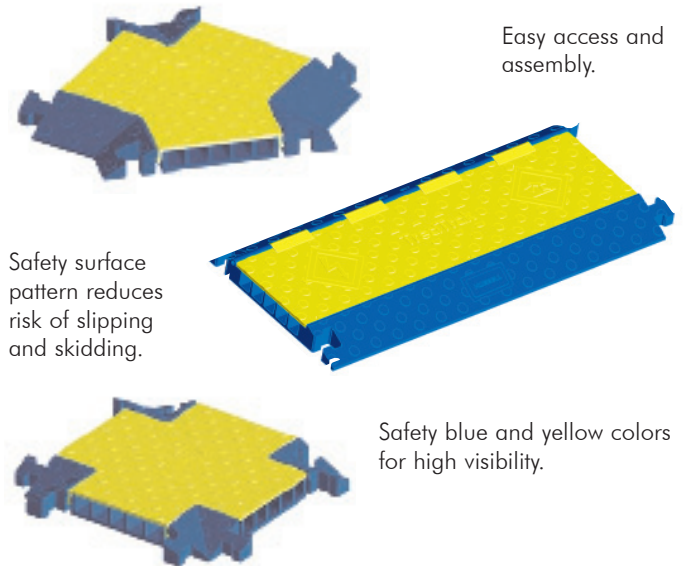

Easy access and assembly.

Safety surface pattern reduces risk of slipping and skidding.

Safety blue and yellow colors for high visibility.

HARSH e3e2e1

SPECIFICATIONS

- ◆ Material: High-density cast polyurethane.
Hinge: Reinforced fiberglass.
- ◆ Operating Temperature Range: TIA/EIA-568-B -25°C to 70°C.

TREDTRAK[®]

- ◆ Height: 1.95" (50).
- ◆ Cable channel dimensions:
Width x Height: 1.3" x 1.3".
- ◆ Cable bundle diameters up to 1.28".
- ◆ Light traffic.

TRUKTRAK[®]

- ◆ Height: (C) 2.31" (57.2).
- ◆ Cable channel dimensions:
Width (D) x Height (E): 1.25" (31.8) x 1.25" (31.8).
- ◆ Cable bundle diameters up to 1.25".

Hubbell **HI-IMPACT[™] TRUKTRAK[®]** and **TREDTRAK[®]** non-metallic cable protectors are designed to safeguard electrical and communication cables from vehicle and pedestrian traffic. Both are 5 channel systems that are designed to provide easy installation, breakdown and storage.

The **HI-IMPACT[™] TRUKTRAK[®]** system is designed to protect cables up to 1.25" in diameter in an industrial environment where it is necessary to support heavy trucks and fork lifts. The **HI-IMPACT[™] TREDTRAK[®]** protects cable diameters up to 1.28" (32.5mm) and is designed to support pedestrian and light vehicle traffic in public, institutional and commercial applications.

The Hubbell modular cable protection line also permits compliance with NEC[®] requirements (Article 525) for insulating electrical cables and cord at carnivals, amusement parks, convention centers and similar public areas.

Hubbell's **HI-IMPACT[™]** system is more than just a connection. It is a complete end-to-end communications solution designed to solve problems in the most punishing environments.

APPLICATIONS

- Use TredTrak for lightweight traffic applications in public, institutional and commercial environments.
- Use TrukTrak for heavy duty industrial locations with heavy weight traffic such as trucks and fork lifts.

APPROVALS

- Safety Symbols per ANSI. Z535.3-1991

TREDTRAK®**Order Information**

Description	A	B	Weight lbs. (kg)	Maximum Load lbs. (N) @		Catalog No.
				21°C	48°C	
36" TredTrak	36" (914.1)	17.5" (445)	18 (18.2)	10,500 (46,700)	6,500 (28,900)	HBLTRED5BHI
End Caps (pair)	Male 5.5" (120)	17.5" (445)	2.5 (1.13)	10,500 (46,700)	6,500 (28,900)	HBLTRED5ECBHI
	Female 6.75" (171)					
"X" Fitting	17.5" (445)	19.5" (500)	12 (5.43)	2,900 (12,900)	2,300 (10,230)	HBLTRED5XBHI
"Y" Fitting	17.5" (445)	19.5" (500)	12 (5.43)	2,900 (12,900)	2,300 (10,230)	HBLTRED5YBHI

TRUKTRAK®**Order Information**

Description	A	B	Weight lbs. (kg)	Maximum Load lbs. (N) @		Catalog No.
				21°C	48°C	
36" TrukTrak	36" (914.4)	20" (508)	29 (13.2)	20,150 (89,627)	9,200 (40,921)	HBLTT5BHI
End Caps (pair)	Male 5.25" (183.4)	20" (508)	4.7 (2.1)	20,150 (89,627)	9,200 (40,921)	HBLTT5ECBHI
	Female 7.5" (114.3)					
45° Left Turn	25" (635)	20" (508)	13 (5.9)	20,150 (89,627)	9,200 (40,921)	HBLTT545LBHI
45° Right Turn	25" (635)	20" (508)	13 (5.9)	20,150 (89,627)	9,200 (40,921)	HBLTT545RBHI

ACCESSORIES**HI-IMPACT™ Connectors**

Delivery: 1 housing, 1 jack, 1 flat bulkhead gasket, and 1 retaining nut.

Description	Connector
Cat 6	HI6
Cat 5e	HI5E
Cat 5e In-Line Coupler	HI5EC
Cat 5e Shielded	HI5ESC

**HI-IMPACT™ Cords****HI-IMPACT™ to HI-IMPACT™ Connector**Catalog No. **HI**XXEE****HI-IMPACT™ Connector to RJ-45**Catalog No. **HI**XXAE****HI-IMPACT™ RJ-45 to RJ-45**Catalog No. **HI**XXAA****** = Type: 5E = Category 5e;****5ES = Cat 5e, Shielded; 6 = Category 6****XX = Length****03 = 3' 05 = 5' 07 = 7' 10 = 10'****15 = 15' 20 = 20' 25 = 25'****Hubbell Premise Wiring**

HUBBELL INCORPORATED (Delaware)

14 Lord's Hill Road • Stonington, CT 06378-0901 • (860) 535-8326 • 800-626-0005

Fax: (860) 535-8328 • Internet site: <http://www.hubbell-premise.com>**Worldwide Locations**

Hubbell Premise Wiring, Asia Pacific
 Hubbell Canada Inc.
 Hubbell Premise Wiring, Central America
 Hubbell Premise Wiring, China
 Hubbell Premise Wiring, Colombia
 Hubbell Premise Wiring, Europe
 Hubbell Int'l. Inc., Korea Branch

852-2836-7131
 905-839-1138
 506-309-4158
 8621-6309-0119
 571-245-8940
 44-01283 500500
 82-2-(0)2607-1363

Fax: 852-2836-7132
 Fax: 905-839-9108
 Fax: 506-260-1616
 Fax: 8621-6309-0122
 Fax: 571-340-0925
 Fax: 44-01283 500400
 Fax: 82-2-(0)2603-7386

Hubbell Premise Wiring, Latin America
 Hubbell de Mexico, S.A. de C.V.
 Hubbell Premise Wiring, Middle East
 Hubbell-Taian Co., Ltd., Taiwan
 Hubbell Premise Wiring, Turkey
 Hubbell Premise Wiring, Venezuela

305-408-4501
 (5255) 9151-9999
 971-4-393-4192
 886-2-2522-1862
 90-216-313-5016
 58-416-680-7453

Fax: 305-408-8201
 Fax: (5255) 9151-9989
 Fax: 971-4-393-4194
 Fax: 886-2-2522-1872
 Fax: 90-216-414-8148
 Fax: 58-281-274-7900