



Grounding Connectors and Accessories

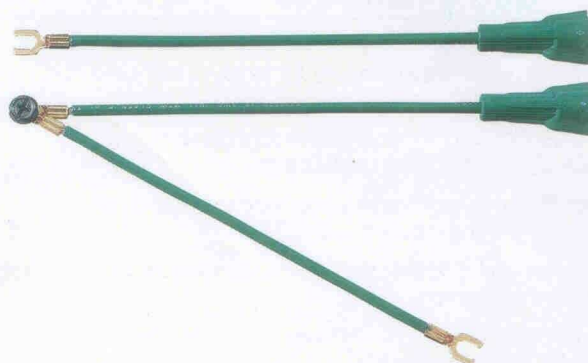


Description	Quantity/Pkg.	Cat. No.
Term-a-Nut® grounding connector w/ring and ground screw	Bag of 25	30-3182
Term-a-Nut® grounding connector w/green jumper ring and ground screw	Bag of 25	30-3186
Stranded wire pigtail, #12 AWG green w/#10 fork terminal, #10 ring/screw	Bag of 25	30-3184
Solid wire pigtail, #14 AWG green w/loop and screw	Bag of 25	30-3190
Solid wire pigtail, #12 AWG green w/loop and screw	Bag of 25	30-3192
Term-a-Nut® grounding connector w/#10 fork terminal	Bag of 25	30-3180
Thread-forming ground screw w/combination hex, phillips, and slotted head	50-pc. Clam	30-3194

- Term-a-Nut® grounding connectors address specific requirements for grounding to steel outlet boxes and wiring multiple devices
- Solid and stranded pigtail lead wires are convenient for stranded device grounding applications
- Grounding screws offer a unique thread-forming feature, plus combination hex, phillips, and slotted head

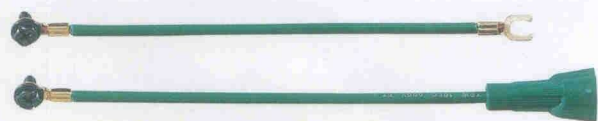

In-Sure™ Push-In Wire Connectors

- Clear shell makes connection easy to inspect
- Low wire insertion force for fast, easy applications
- No-twist connection reduces repetitive motion fatigue
- Check port for continuity testing
- Electrolytic tin-plated internal copper bus for high conductivity
- UL Listed and CSA Certified
- Accepts any combination of 12 through 18 AWG solid copper conductors

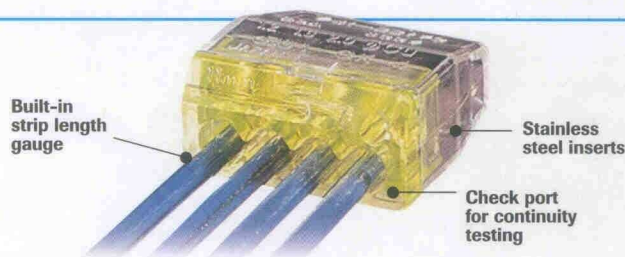

Model	Color	Ports	Length		Width		Height		Quantity	Cat. No.
			In.	mm	In.	mm	In.	mm		
84	Red	2	.355	9.02	.434	11.02	.729	18.52	Jar of 300	30-084J
									Box of 1000	30-184
									Box of 5000	30-684
85	Orange	3	.355	9.02	.591	15.01	.729	18.52	Jar of 250	30-085J
									Box of 1000	30-185
									Box of 5000	30-685
86	Yellow	4	.355	9.02	.748	18.99	.729	18.52	Jar of 200	30-086J
									Box of 1000	30-186
									Box of 5000	30-686
87	Gray	5	.355	9.02	.907	23.03	.729	18.52	Jar of 150	30-087J
									Box of 1000	30-187
									Box of 5000	30-687
88	Blue	6 Stacked	.607	15.42	.603	15.32	.729	18.52	Jar of 100	30-088J
									Box of 1000	30-188
									Box of 5000	30-688
90	Black	8	.355	9.02	1.38	35.03	.717	18.21	Jar of 100	30-090J
									Box of 1000	30-190
									Box of 5000	30-690



COPPER TO COPPER ONLY. Do not use on aluminum
 Temperature rating: 105°C (221°F) maximum
 600V maximum building wire, 1000V maximum signs or lighting fixtures

