



Product Data Sheet

142X123

Replace "X" with 1, 2 or 3 for number of poles

Power Stud Block

200 Amps, 600 Volts (AC/DC)



Wire Range:

Line side: (1) 1/4 – 20 Screw

Load Side: (1) 1/4 – 20 Screw

This product suitable for use with [Listed Crimp-Type Lug Rings](#)

Electrical Ratings:

- 200A Copper wire
- 600 Volts AC/DC (UL 1059 Class C, User Group - General Industrial)
- Factory and Field Wiring

NOTE: Use outside these ratings must be judged in end-use application

Mechanical Ratings:

- Insulator base temperature: -40°C to 125°C (257°F) UL RTI
- Flammability rating of insulator base: UL 94 V-0

Materials:

- Bus Bar: Copper, tin plated
- Insulator base: Phenolic
- Terminal set screws: Brass, nickel plated
- Connector mounting screws: Steel, zinc plated

Agency Approvals:

- UL Recognized, UL 1059 Terminal Block Standard, File No. XCFR2.E62806
- CSA Certified, CSA C22.2 No. 158, File No. LR19766
- CE compliant to IEC 60947-7-1
- RoHS Compliant

Recommended Torque:


50 in-lbs

Mounting:

- Panel mountable: #10 fastener, torque to 25-30 in. lbs

Accessories:

- Cover: Clear protective plastic cover. Catalog description CC142X ("X" numbers of poles, 1, 2 or 3).
- Marking strip: White vinyl strip to mark circuits. Supplied with mounting screws.

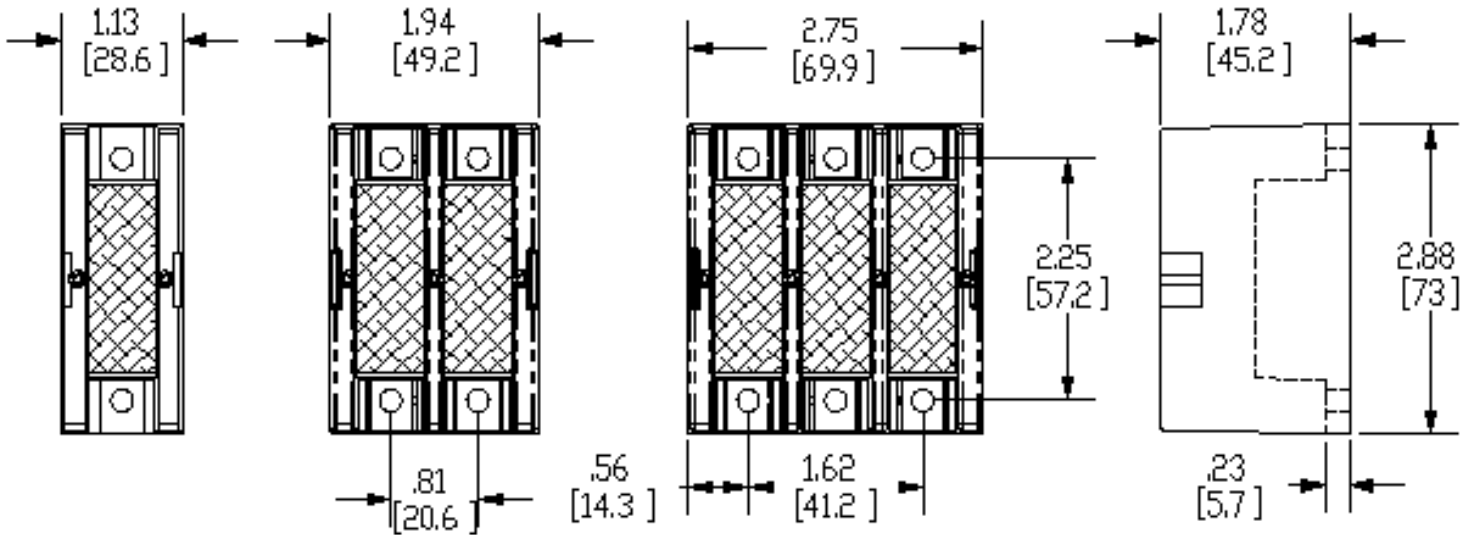

WWW.MARATHONSP.COM
(419) 352-8441