



G5015 series

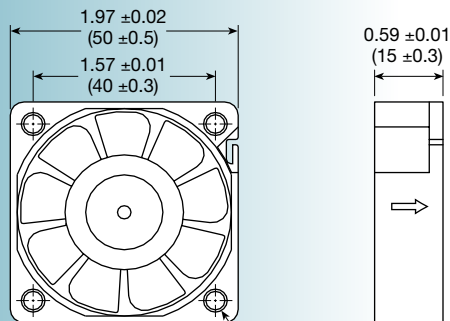

Size: (50 x 50 x 15 mm)
1.97 x 1.97 x 0.59 inches

Construction: UL94V-0 PBT impeller & frame


Bearing option: ball bearing

Connection: AWG 26, UL1061 lead wires

Frame: ribbed

Protection: thermal

Options: tachometer output or
 locked rotor alarm signal

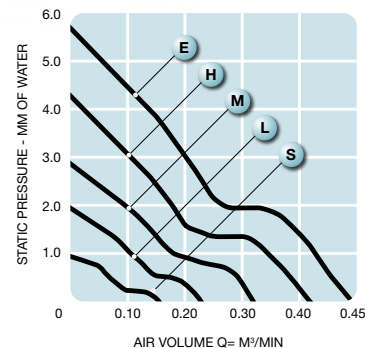

Model No.	Rated Voltage V	Current mA			Revolution RPM	Air Volume		Max. Static Pressure (H ₂ O)		Sound Noise dbA	Weight g
		5	12	24		M³/Min.	CFM	MM	INCH		
G5015S	5/12/24	150	80	70	2,500	0.15	5.00	0.92	0.04	20	20
G5015L	5/12/24	220	130	100	3,500	0.22	8.00	1.94	0.08	22	20
G5015M	5/12/24	300	200	140	4,500	0.31	11.00	2.86	0.11	24	20
G5015H	5/12/24	400	280	180	5,500	0.37	13.00	4.29	0.17	29	20
G5015E	12/24	-	400	250	6,500	0.44	16.00	5.71	0.22	34	20