
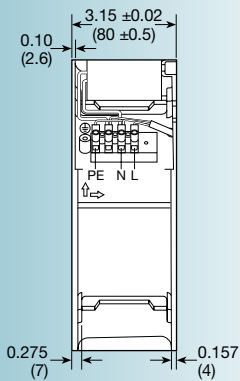


UF200BMB-H2 series

-H2C2A


(standard with Frame)

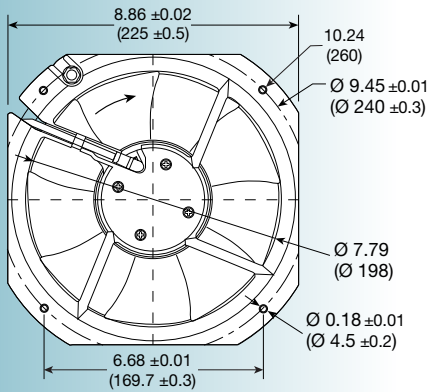

Size: (225 x 225 x 80 mm)
8.86 x 8.86 x 3.15 inches

Features: **metal frame and impeller; Class F insulation; -20° ~ 70°C operating temperature range; high-temp bearing lubricant**


Operating voltage (VAC): 115 or 230
Bearing option: motor quality ball bearings
Motor: permanent split capacitor
Air flow: exhaust over struts
Connection: terminal/lead wires
Protection: thermal

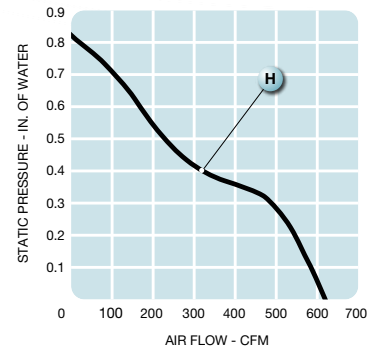

Model No.	Rated Voltage V	Freq. HZ	Input Power W	Rated Cur. A	Locked Cur. A	Speed RPM	Air Volume		Max. Static Pressure (H ₂ O)		Sound Noise db
							M ³ /Min.	CFM	MM	INCH	
UF200BMB12-H2	115	60	100	0.88	1.31	3000	17.7	625	20.5	0.81	61
UF200BMB23-H2	230	60	80	0.37	0.61	3000	17.7	625	20.5	0.81	61

-H2C2B

(With Guard/No Frame)

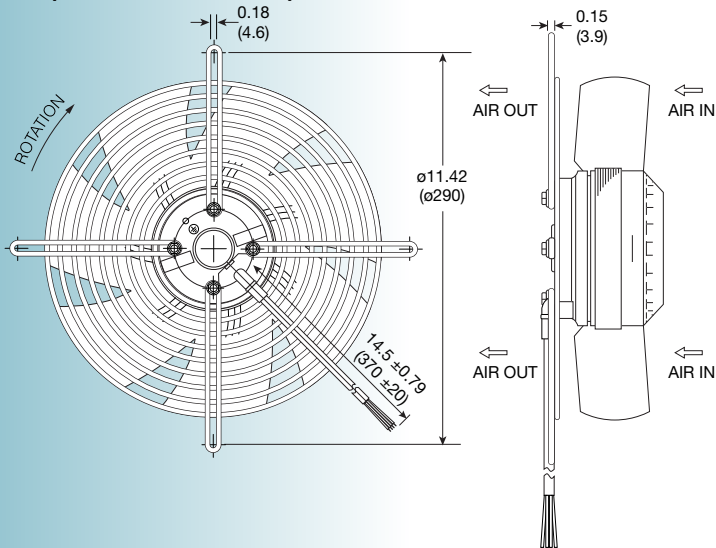

-H2C2E

(Without Frame or Guard)

