

GFN

1-1/2" X 13/32" MIDGET FUSES



GFN midget indicating fuses are available in 34 ratings from 1/10A through 30A. These time-delay fuses have built-in blown fuse indicators which pop out at the end of the fuse to visually indicate when the fuse has operated to open the circuit. Indicators may be used to trip a switch for remote as well as visual annunciation. (Not for Branch Circuit Protection).

Features/Benefits

- **Pin indicator** provides visual indication of open fuse or actuates switch for remote signaling
- **Numerous ratings** for a wide variety of applications
- **12 second time delay** at 200% rating
- Can be used with **ULTRASAFE™** fuse holders

HIGHLIGHTS:

- Pin Indicating
- Time Delay

APPLICATIONS:

- For supplemental protection of circuits where time delay and blown fuse indication are required, such as solenoid circuits or control circuits.

Ratings


- **AC:** 1/10 to 10A
250VAC, 200A I.R.,
125VAC, 10kA I.R.;
- 12 to 15A
125VAC, 10kA I.R.;
- 20 to 30A
32VAC, 10kA I.R.

Approvals

- UL Listed to Standard 248-14 (1/10 to 15A)
- CSA Certified to Standard C22.2 No. 248.14 (1/10 to 15A)



Melting Time – Current Data 1 - 30 Amperes, 250 Volts AC

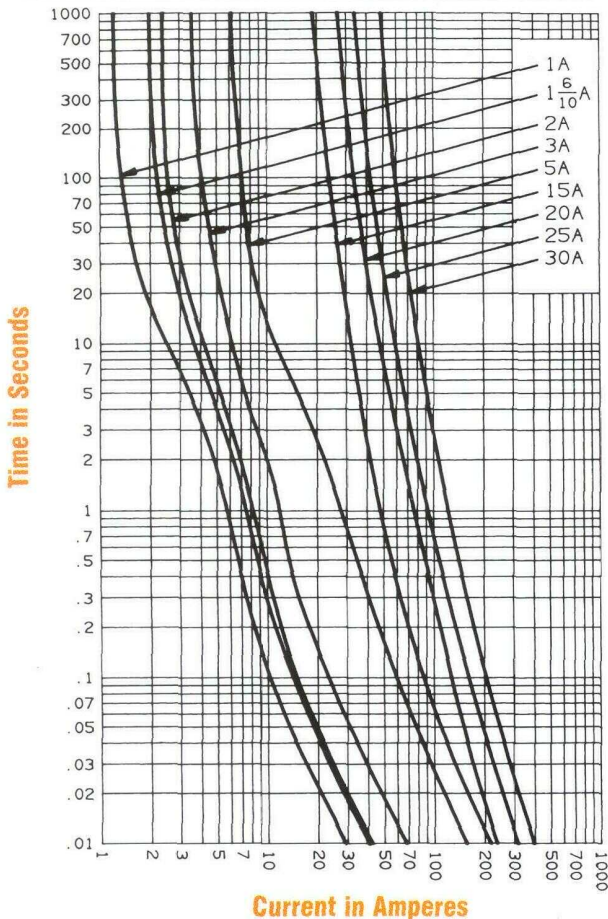

Standard Fuse Ampere Ratings, Catalog Numbers

AMPERE RATING	CATALOG NUMBER	AMPERE RATING	CATALOG NUMBER
1/10	GFN1/10	2	GFN2
1/8	GFN1/8	2-1/4	GFN2-1/4
15/100	GFN15/10	2-1/2	GFN2-1/2
2/10	GFN2/10	3	GFN3
1/4	GFN1/4	3-2/10	GFN3-2/10
3/10	GFN3/10	3-1/2	GFN3-1/2
4/10	GFN4/10	4	GFN4
1/2	GFN1/2	4-1/2	GFN4-1/2
6/10	GFN6/10	5	GFN5
8/10	GFN8/10	6-1/4	GFN6-1/4
1	GFN1	8	GFN8
1-1/8	GFN1-1/8	10	GFN10
1-1/4	GFN1-1/4	12	GFN12
1-4/10	GFN1-4/10	15	GFN15
1-1/2	GFN1-1/2	20	GFN20
1-6/10	GFN1-6/10	25	GFN25
1-8/10	GFN1-8/10	30	GFN30