



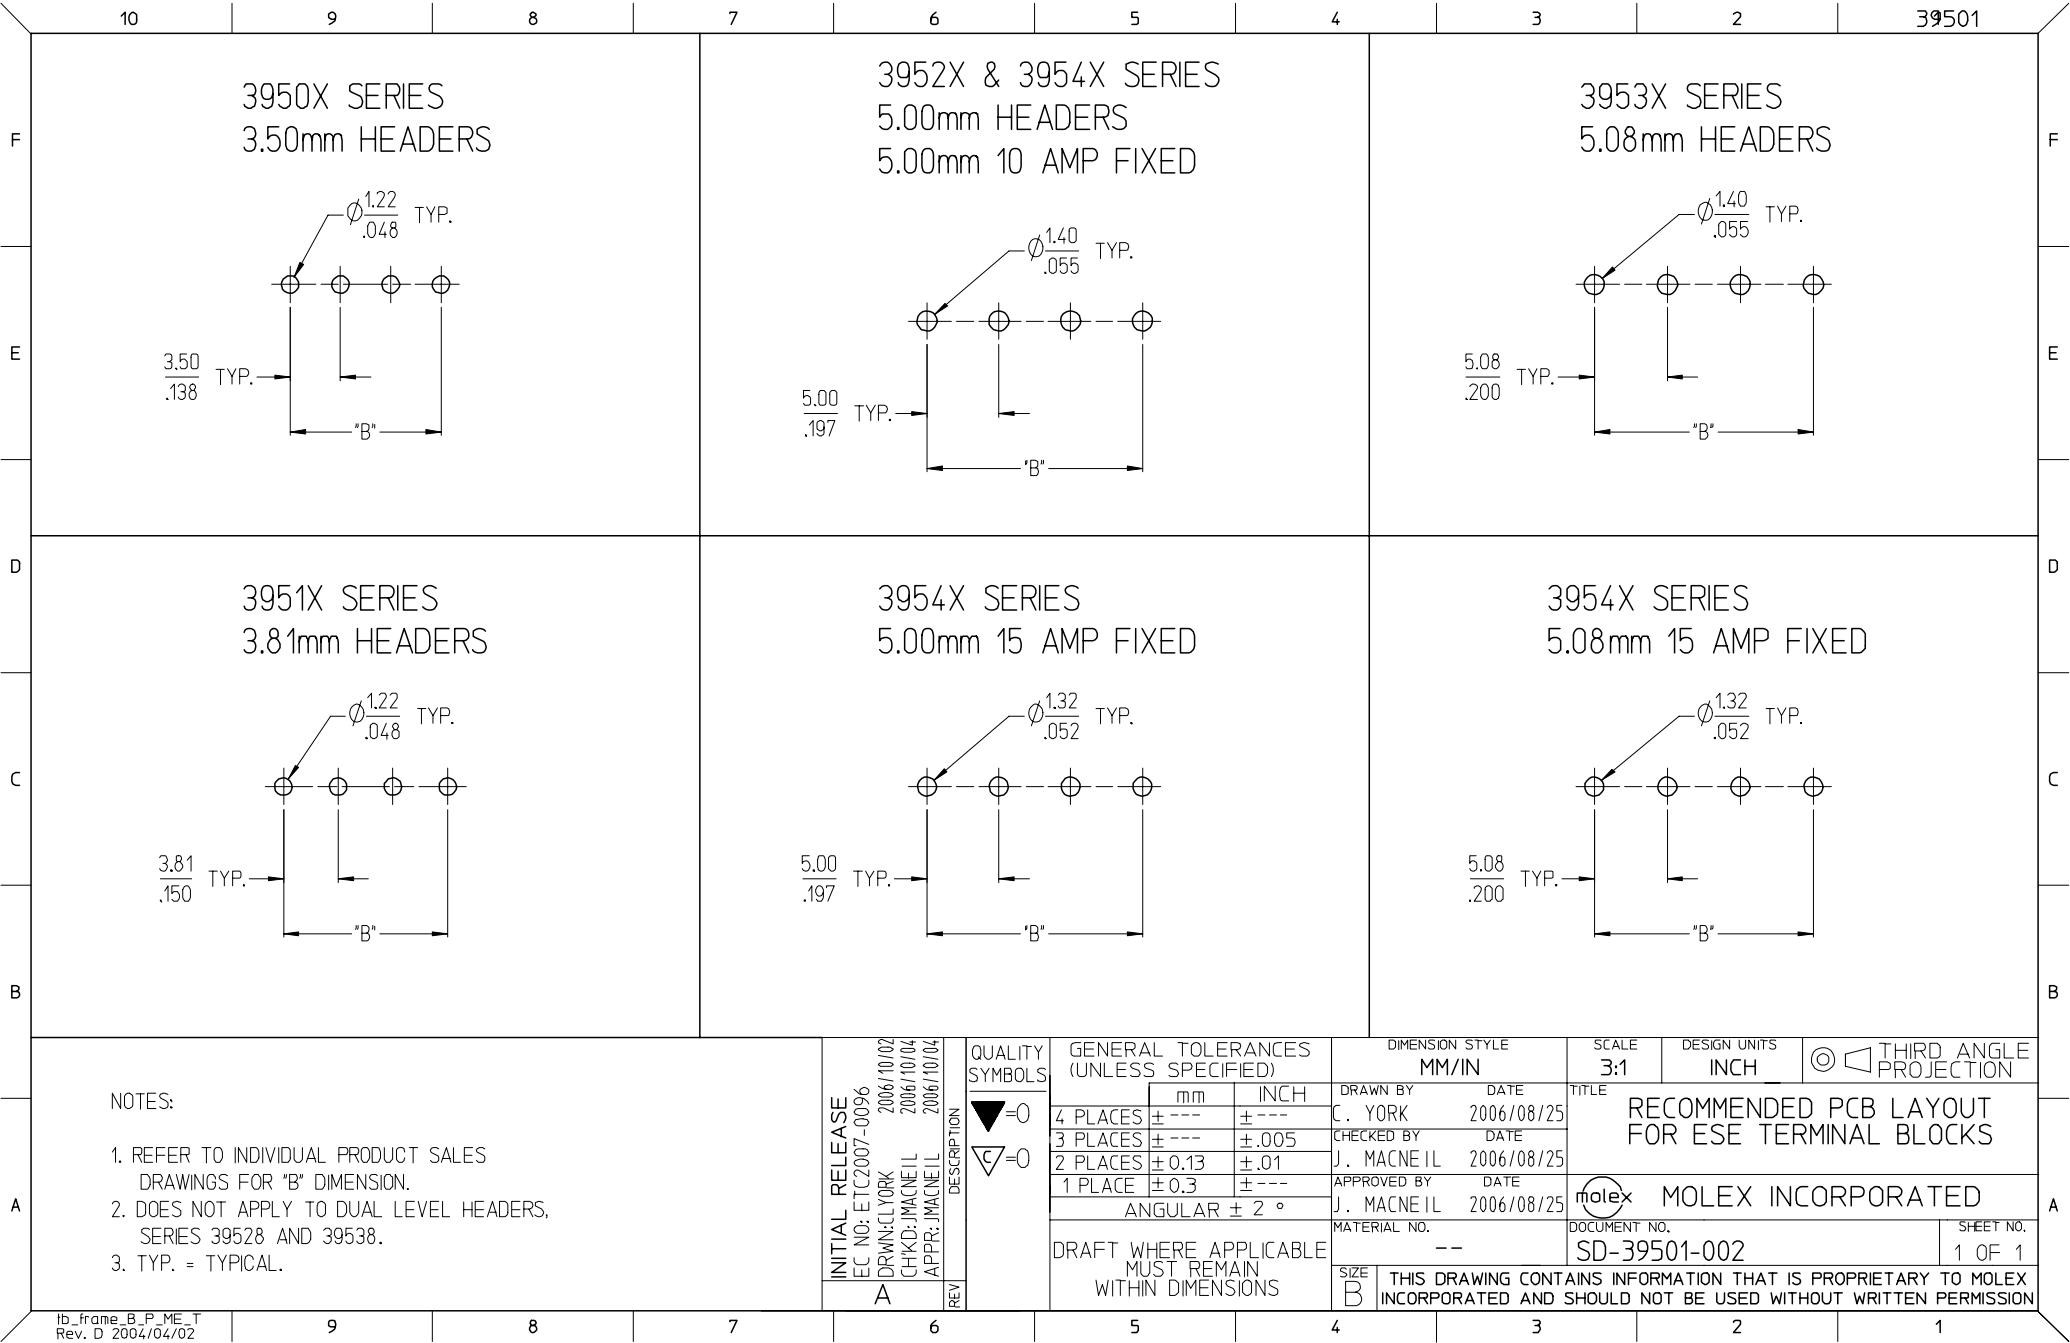

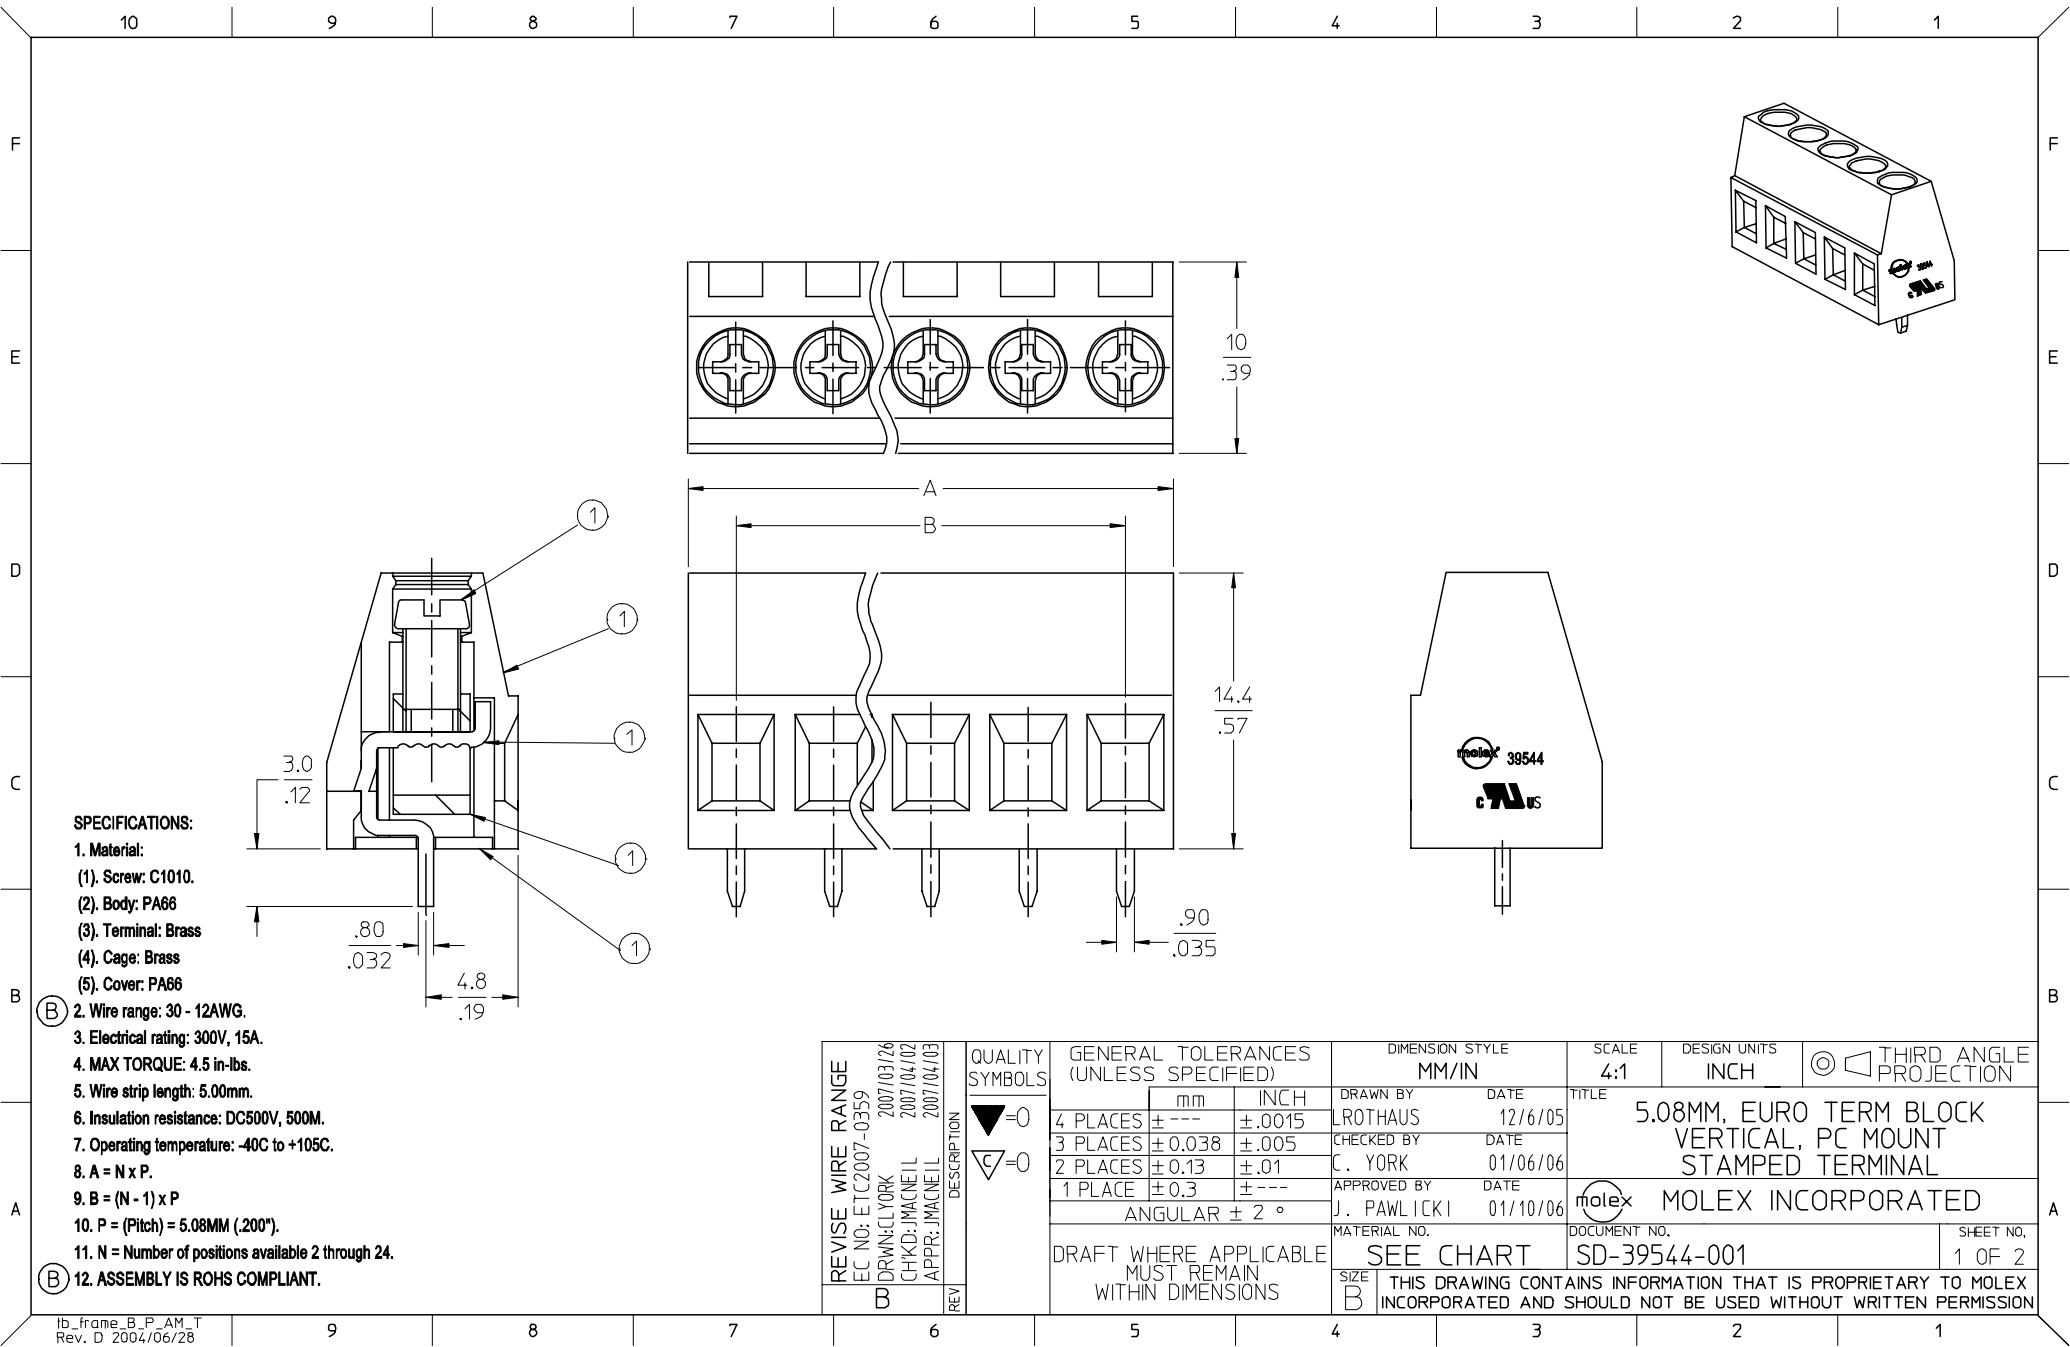

SPECIFICATIONS:

- 1. Material:**
(1). Screw: C1010.
(2). Body: PA66
(3). Terminal: Brass
(4). Cage: Brass
(5). Cover: PA66
- 2. Wire range:** 30 - 12AWG.
3. Electrical rating: 300V, 15A.
4. MAX TORQUE: 4.5 in-lbs.
5. Wire strip length: 5.00mm.
6. Insulation resistance: DC500V, 500M.
7. Operating temperature: -40C to +105C.
8. A = N x P.
9. B = (N - 1) x P
10. P = (Pitch) = 5.08MM (.200").
11. N = Number of positions available 2 through 24.
12. ASSEMBLY IS ROHS COMPLIANT.

REVISE WIRE RANGE	DESCRIPTION	REV
EC NO: ETC2007-0359	2007/03/26	
DRWN:CLYORK	2007/04/02	
CHKD:IMACNEIL	2007/04/03	
APPR:IMACNEIL		

QUALITY SYMBOLS
▽=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)		
	mm	INCH
4 PLACES	± ---	±.0015
3 PLACES	± 0.038	±.005
2 PLACES	± 0.13	±.01
1 PLACE	± 0.3	± ---
ANGULAR ± 2 °		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		

DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
MM/IN	4:1	INCH	
DRAWN BY	DATE	TITLE	
LROTHAUS	12/6/05	5.08MM, EURO TERM BLOCK VERTICAL, PC MOUNT STAMPED TERMINAL	
CHECKED BY	DATE	MOLEX INCORPORATED	
C. YORK	01/06/06	SD-39544-001	
APPROVED BY	DATE	SHEET NO.	
J. PAWLICKI	01/10/06	1 OF 2	
MATERIAL NO.	SEE CHART	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	

SCALE 4:1	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION
TITLE 5.08MM, EURO TERM BLOCK VERTICAL, PC MOUNT STAMPED TERMINAL		
 MOLEX INCORPORATED		
DOCUMENT NO. SD-39544-001		SHEET NO. 1 OF 2
ALL INFORMATION THAT IS PROPRIETARY TO MOLEX SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

