



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	WEIGHT
DPA24688TGY	1.26 lb (572.73 g)



NOTES:

1. SEE CURRENT CATALOG FOR VARIOUS APPLICATIONS AS WELL AS OPTIONAL ICONS.
2. MATERIAL:
PANEL HOUSING: STEEL
RJ45 MODULES: THERMOPLASTIC RESIN UL94V-0
PUNCHDOWN BLOCKS: THERMOPLASTIC RESIN UL94V-0
BEZEL ASSEMBLY: THERMOPLASTIC RESIN UL94H-B
RETENTION CAP:
THERMOPLASTIC RESIN UL94V-0
3. 24 PORT ANGLED PATCH PANEL 8 POSITION 8 WIRE.
4. THE PATCH PANEL IS DESIGNED FOR MOUNTING TO 19" UNIVERSAL RACKS.
5. FOUR (4) 12-24 X 1/2" ROUND HEAD SCREWS AND (4) M6x1x15MM METRIC SCREWS ARE PROVIDED FOR FASTENING TO RACKS.
6. DIMENSIONS IN BRACKETS ARE IN METRIC.
7. USE 110 STYLE TERMINATION TOOL FOR PUNCHDOWN.
8. RETENTION CAPS (ONE PER CONNECTOR) PROVIDED FOR SNAP-IN ON TERMINATED CONNECTORS.

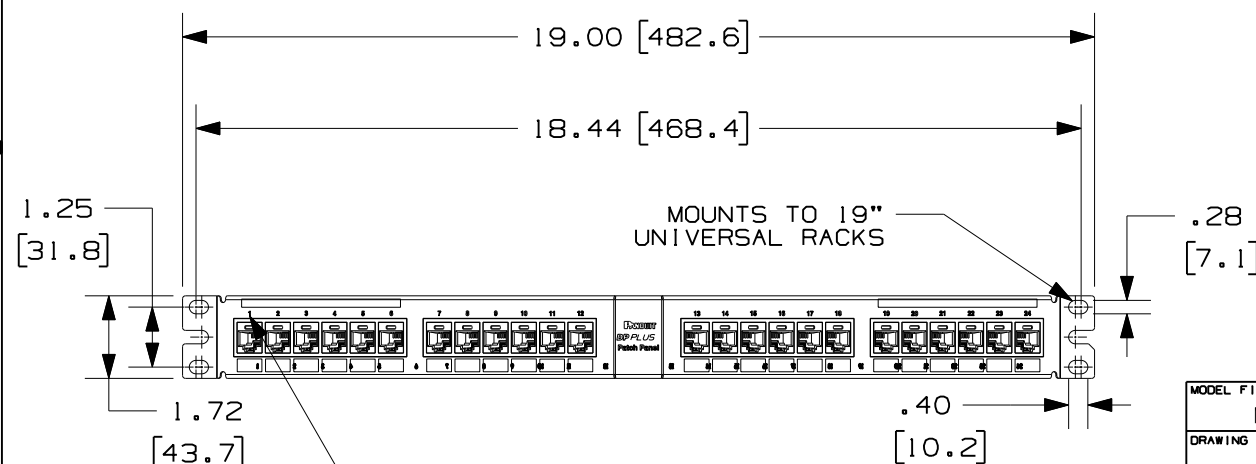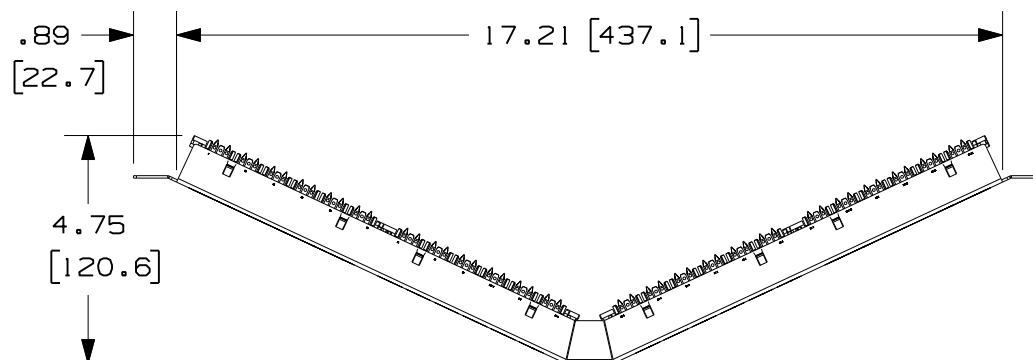

CID**-C & CIP**-C, PHONE OR DATA ICON LOCATES HERE. IDENTIFIES INDIVIDUAL PORT. OPTIONAL, NOT SUPPLIED.

MODEL FILENAME M02088AC_1RU_24PORT_ANG_PANEL_ASSY_04		SIZE A
DRAWING FILENAME M02479JD_DC240/00B		
DP6 PLUS 24 PORT ANGLED PATCH PANEL CUSTOMER DRAWING		
	PANDUIT TM CORP. TINLEY PARK, ILL 60477	I.I. NUMBER
		PRODUCT SPEC
	ALL DIMENSIONS ARE GIVEN IN INCHES, UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: (.X) ±.03 (.XXX) ±.005 (.XX) ±.01 ANGLES ± 1°	WORK INSTRUCTION
		SCALE .25 : 1
DRAWN BY LZ	REVIEW DRAWING NUMBERS	PART NO. SEE CHART
DATE 3-4-06		DRAWING NO. 02479-240
CHK'D CEF		

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
I	1-7-09	BJN	EJH	A. WAS 1070.48 g	02479-240	EJH			
R	3-4-06	LZ	CEF	RELEASED TO PRODUCTION	02479-240	CEF		CEF	CEF