


PROLINE® External Components

Doors, Covers, and Sides

Window Doors **A-T-O**


Window doors can be used on the front or rear of PROLINE frames to provide viewing of electronic equipment.



PROLINE window doors are designed around an extruded aluminum profile. They have 140 degree hidden hinges and a flush bezel with a slotted insert that operates a 3-point latching mechanism (doors for 700mm frames have 2-point latching). Doors have either a smoke gray tinted polycarbonate or a clear safety glass window. 180 degree hinges are available (order separately).

All window doors:

- Install easily on front or rear of enclosure frame; can be hinged on left or right
- .25-inch thick window provides maximum protection and viewing area
- Foam-in-place urethane gaskets for door and window provide optimum sealing
- Two grounding brackets
- RAL 7035 gray textured finish (except stainless steel)

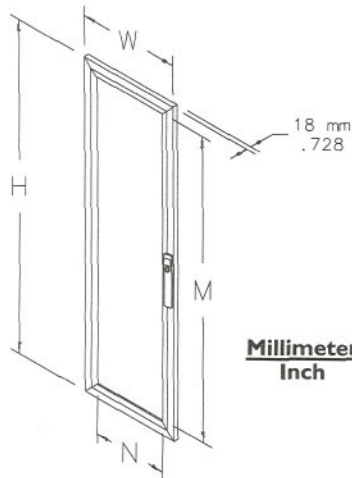

87414927

Millimeter
Inch

Catalog Number	Safety Glass	Polycarbonate	Stainless Steel	Fits Frame A x B	Saf. Glas/Poly H x W	Stainless St. H x W	Window Size M x N
P-DWG76	P-DW76	P-DWG76SS		700 x 600	639 x 592.9 (25.16 x 23.34)	639 x 591.8 (25.16 x 23.30)	517.6 x 445.7 (20.38 x 17.55)
P-DWG78	P-DW78	P-DWG78SS		700 x 800	639 x 792.9 (25.16 x 31.22)	639 x 791.8 (25.16 x 31.17)	517.6 x 645.7 (20.38 x 25.42)
P-DWG146	P-DW146	P-DWG146SS		1400 x 600	1339 x 592.9 (52.72 x 23.34)	1339 x 591.8 (52.72 x 23.30)	1217.6 x 445.7 (47.94 x 17.55)
P-DWG148	P-DW148	—		1400 x 800	1339 x 792.9 (52.72 x 31.22)		1217.6 x 645.7 (47.94 x 25.42)
P-DWG166	P-DW166	P-DWG166SS		1600 x 600	1539 x 592.9 (60.59 x 23.34)	1539 x 591.8 (60.59 x 23.30)	1417.6 x 445.7 (55.81 x 17.55)
P-DWG167	P-DW167	—		1600 x 700	1539 x 692.9 (60.59 x 27.28)		1417.6 x 545.7 (55.81 x 21.48)
P-DWG168	P-DW168	—		1600 x 800	1539 x 792.9 (60.59 x 31.22)	1539 x 791.8 (60.59 x 31.17)	1417.6 x 645.7 (55.81 x 25.42)
P-DWG186	P-DW186	—		1800 x 600	1739 x 592.9 (68.46 x 23.34)		1617.6 x 445.7 (63.69 x 17.55)
P-DWG187	P-DW187	—		1800 x 700	1739 x 692.9 (68.46 x 27.28)		1617.6 x 545.7 (63.69 x 21.48)
P-DWG188	P-DW188	P-DWG188SS		1800 x 800	1739 x 792.9 (68.46 x 31.22)	1739 x 791.8 (68.46 x 31.17)	1617.6 x 645.7 (63.69 x 25.42)
P-DWG206	P-DW206	P-DWG206SS		2000 x 600	1939 x 592.9 (76.34 x 23.34)	1939 x 591.8 (76.34 x 23.30)	1817.6 x 445.7 (71.56 x 17.55)
P-DWG207	P-DW207	—		2000 x 700	1939 x 692.9 (76.34 x 27.28)		1817.6 x 545.7 (71.56 x 21.48)
P-DWG208	P-DW208	P-DWG208SS		2000 x 800	1939 x 792.9 (76.34 x 31.22)	1939 x 791.8 (76.34 x 31.17)	1817.6 x 645.7 (71.56 x 25.42)
P-DWG226	P-DW226	—		2200 x 600	2139 x 592.9 (84.21 x 23.34)		2017.6 x 445.7 (79.43 x 17.55)
P-DWG227	P-DW227	—		2200 x 700	2139 x 692.9 (84.21 x 27.28)		2017.6 x 545.7 (79.43 x 21.48)
P-DWG228	P-DW228	P-DWG228SS		2200 x 800	2139 x 792.9 (84.21 x 31.22)	2139 x 791.8 (84.21 x 31.17)	2017.6 x 645.7 (79.43 x 25.42)

Inch dimensions in ().

DataCom Window Doors

A-T-O

- Window doors provide direct viewing of equipment, while providing maximum protection.
- Welded steel frame provides excellent strength.
- Mounting hardware included.
- RAL 7035 textured light gray finish.
- Includes flush keylocking trigger latch.

Catalog Number	Fits Frame A x B	Window Size M x N
Window Door		
P-DW146D	1400 x 600	1212 x 395 (47.72 x 15.55)
P-DW166D	1600 x 600	1412 x 395 (55.59 x 15.55)
P-DW186D	1800 x 600	1612 x 395 (63.46 x 15.55)
P-DW206D	2000 x 600	1812 x 395 (71.34 x 15.55)
P-DW167D	1600 x 700	1412 x 495 (55.59 x 19.49)
P-DW187D	1800 x 700	1612 x 495 (63.46 x 19.49)
P-DW207D	2000 x 700	1812 x 495 (71.34 x 19.49)
P-DW148D	1400 x 800	1212 x 595 (47.72 x 23.43)
P-DW168D	1600 x 800	1412 x 595 (55.59 x 23.43)
P-DW188D	1800 x 800	1612 x 595 (63.46 x 23.43)
P-DW208D	2000 x 800	1812 x 595 (71.34 x 23.43)

DataCom Vented Window Doors

A-T-O

This door provides for direct viewing of equipment, while providing an extra degree of ventilation. Steel frame with acrylic window and locking trigger latch. 7035 textured gray finish.

Vented Window Door		
P-DW206V	2000 x 600	1806 x 370 (71.10 x 14.50)