



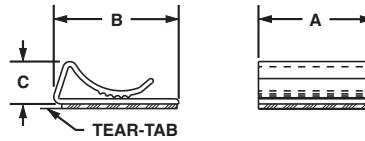

## Flat Cable Clips



- Use with any width flat cable for a maximum stack height of .17 inches (4.3mm)
- Low profile design holds wires, cables, and tubing
- For indoor use only
- Material: PVC



| Part Number | Cable Width          | Length<br>A |      | Width<br>B |      | Height<br>C |     | Color | Mounting Method | Std. Pkg. Qty. | Std. Ctn. Qty. |
|-------------|----------------------|-------------|------|------------|------|-------------|-----|-------|-----------------|----------------|----------------|
|             |                      | In.         | mm   | In.        | mm   | In.         | mm  |       |                 |                |                |
| FCC5-A-C8   | Any width flat cable | 1.00        | 25.4 | .56        | 14.2 | .29         | 7.4 | Gray  | Rubber          | 100            | 1000           |
| FCC-A-C8    |                      | 1.00        | 25.4 | 1.09       | 27.7 | .38         | 9.7 |       |                 | 100            | 1000           |

## Pan-Clamp™ Heavy Duty Fixed Diameter Clamps

- One-piece design significantly reduces installation time
- Integrated ribs prevent rotation of cable bundles and ensures secure grip on hoses
- Material: Impact modified Weather Resistant Nylon 6.6



| Part Number   | Max. Bundle Diameter<br>A |      | Width<br>B |      | Bundle Offset<br>C |      | Max. Panel Thickness |     | Panel Hole Diameter |     | Color | Std. Pkg. Qty. | Std. Ctn. Qty. |
|---------------|---------------------------|------|------------|------|--------------------|------|----------------------|-----|---------------------|-----|-------|----------------|----------------|
|               | In.                       | mm   | In.        | mm   | In.                | mm   | In.                  | mm  | In.                 | mm  |       |                |                |
| PC038-H25D-C0 | .38                       | 9.5  | .62        | 15.7 | .64                | 16.3 | .13                  | 3.2 | .28                 | 7.1 | Black | 100            | 500            |
| PC050-H25D-C0 | .50                       | 12.7 | .62        | 15.7 | .71                | 17.9 | .13                  | 3.2 | .28                 | 7.1 |       | 100            | 500            |
| PC062-H25D-C0 | .63                       | 15.8 | .62        | 15.7 | .77                | 19.5 | .13                  | 3.2 | .28                 | 7.1 |       | 100            | 500            |
| PC075-H25D-C0 | .75                       | 19.1 | .62        | 15.7 | .83                | 21.1 | .13                  | 3.2 | .28                 | 7.1 |       | 100            | 1000           |
| PC087-H25D-C0 | .88                       | 22.1 | .62        | 15.7 | .89                | 22.7 | .13                  | 3.2 | .28                 | 7.1 |       | 100            | 1000           |
| PC100-H25D-C0 | 1.00                      | 25.4 | .62        | 15.7 | .96                | 24.3 | .13                  | 3.2 | .28                 | 7.1 |       | 100            | 1000           |
| PC112-H25D-C0 | 1.13                      | 28.5 | .62        | 15.7 | 1.02               | 25.8 | .13                  | 3.2 | .28                 | 7.1 |       | 100            | 1000           |
| PC125-H25D-C0 | 1.25                      | 31.8 | .62        | 15.7 | 1.08               | 27.4 | .13                  | 3.2 | .28                 | 7.1 |       | 100            | 1000           |