




eurofast® Cordsets, "C" Style, Medium Plug Body

PVC or PUR
Available in 6 and 8 Conductor

Unshielded
Anti-vibration Coupling Nut



See table below



RKC ..

WKC ..

RSC ..

WSC ..

6-Pin, Medium Plug Body, 60 VAC / 75 VDC, 2 A

Female

Male

Application	Cable Specs	Pinout	Straight	Right Angle	Straight	Right Angle
For 6-wire DC UL Recognized CSA Certified	6/24 AWG, Grey PVC 105 C 5.7 mm OD	1. Bn 4. Bk 2. Wh 5. Gy 3. Bu 6. Pk	RKC 6T-*	WKC 6T-*	RSC 6T-*	WSC 6T-*
For 6-wire DC UL Recognized CSA Certified	6/24 AWG, Grey PUR 80°C 5.7 mm OD	1. Bn 4. Bk 2. Wh 5. Gy 3. Bu 6. Pk	RKC 6T-*/S90	WKC 6T-*/S90	RSC 6T-*/S90	WSC 6T-*/S90

8-Pin, Medium Plug Body, 60 VAC / 75 VDC, 2 A

Female

Male

Application	Cable Specs	Pinout	Straight	Right Angle	Straight	Right Angle
For 8-wire DC UL Recognized CSA Certified	8/24 AWG, Grey PVC 105 C 5.7 mm OD	1. Wh 5. Gy 2. Bn 6. Pk 3. Gn 7. Bu 4. Ye 8. Rd	RKC 8T-*	WKC 8T-*	RSC 8T-*	WSC 8T-*
For 6-wire DC and 4-port picofast home run UL Recognized CSA Approved	6/24 AWG, Black PVC 105 C 5.7 mm OD	1. Wh 5. Bn 2. Gn 6. N/C 3. Ye 7. Bu 4. Gy 8. N/C	RKC 8.6T-*	WKC 8.6T-*	RSC 8.6T-*	WSC 8.6T-*

6-Pin, Medium Plug Body, 60 VAC / 75 VDC, 2 A

Application	Cable Specs	Straight Female Straight Male	Straight Female Right Angle Male	Right Angle Female Straight Male	Right Angle Female Right Angle Male
For 6-wire DC UL Recognized CSA Certified	6/24 AWG, Grey PVC 105 C 5.7 mm OD	RKC 6T-*/RSC 6T	RKC 6T-*/WSC 6T	WKC 6T-*/RSC 6T	WKC 6T-*/WSC 6T
For 6-wire DC UL Recognized CSA Certified	6/24 AWG, Grey PUR 80°C 5.7 mm OD	RKC 6T-*/RSC 6T/S90	RKC 6T-*/WSC 6T/S90	WKC 6T-*/RSC 6T/S90	WKC 6T-*/WSC 6T/S90

8-Pin, Medium Plug Body, 60 VAC / 75 VDC, 2 A

Application	Cable Specs	Straight Female Straight Male	Straight Female Right Angle Male	Right Angle Female Straight Male	Right Angle Female Right Angle Male
For 8-wire DC UL Recognized CSA Certified	8/24 AWG, Grey PVC 105 C 5.7 mm OD	RKC 8T-*/RSC 8T	RKC 8T-*/WSC 8T	WKC 8T-*/RSC 8T	WKC 8T-*/WSC 8T
For 6-wire DC and 4-port picofast home run UL Recognized CSA Approved	6/24 AWG, Black PVC 105 C 5.7 mm OD	RKC 8.6T-*/RSC 8.6T	RKC 8.6T-*/WSC 8.6T	WKC 8.6T-*/RSC 8.6T	WKC 8.6T-*/WSC 8.6T

* = Length in meters


Specifications

Connector:	Oil resistant polyurethane body material, PUR contact carrier, spacings to VDE 0110 Group C.
Contacts:	Gold plated brass.
Coupling Nuts:	Nickel plated brass. For options, see below**.
Cable:	See table.
Protection:	NEMA 1,3,4,6P and IEC IP 68.
Cable Length:	Standard cable lengths are nominal 2, 4 and 6 meters. Other lengths available by request - consult factory.

**** Options:** To specify stainless steel coupling nut, add a "V" to part number.
For example: RKC .. to RKC V .. (straight female) or WSC .. to WSC V .. (right angle male).

Dimensions


RKC .. -* -RSC ..

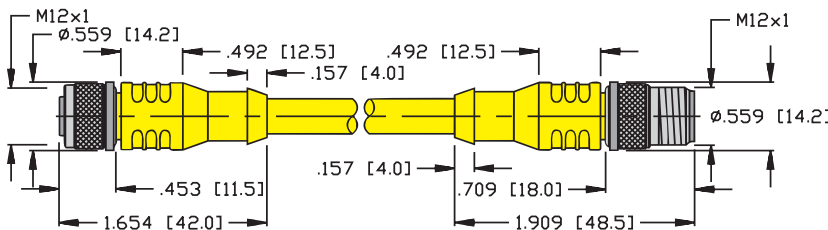


Note:

Replace right end of illustrations at left with WSC shown below for RKC .. -* -WSC .. and WKC .. -* -WSC .. configuration.

.. - WSC ..

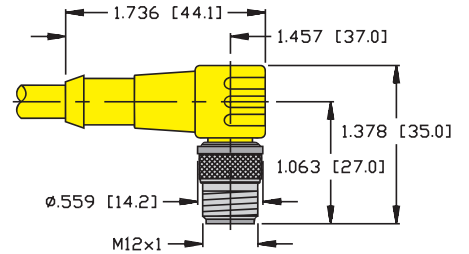

WKC .. -* -RSC ..

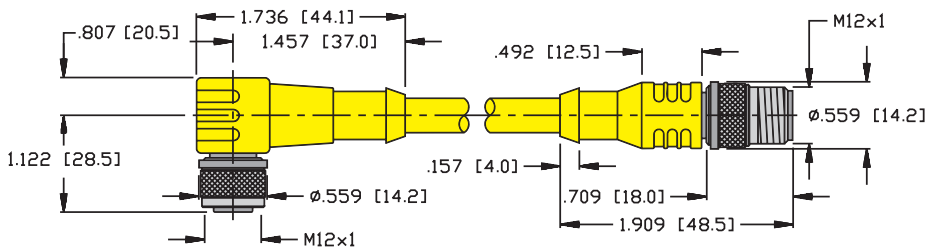

Pinouts

Female		Male	
6-pin	8-pin	6-pin	8-pin