



## picofast® Standard Duty Cordsets, Unshielded, Polyurethane


- Standard Duty Oil Resistant Polyurethane
- Unshielded
- Snap Lock or Threaded Coupling Nut
- Available in 3 or 4 Conductors



PKG .. Z- ..



PKW .. Z- ..




PSG ..


### Snap Lock, 3 and 4-pin

Application	Cable Specs	Pinout	Female		Male	
			Straight	Right Angle	Straight	
Snap lock, 3-wire PUR cable CSA	125 VAC/DC 4.0 A 3/24 AWG, Black PUR 80°C 4.4 mm OD	1. Bn 3. Bu 4. Bk	PKG 3Z-*/S90	PKW 3Z-*/S90	PSG 3-*/S90	- - - -
Snap lock, 4-wire PUR cable CSA	125 VAC/DC 2.0 A 4/26 AWG, Black PUR 80°C 4.4 mm OD	1. Bn 2. Wh 3. Bu 4. Bk	PKG 4Z-*/S90	PKW 4Z-*/S90	PSG 4-*/S90	- - - -
Snap lock, 6-wire PUR cable	24 VDC 1.0 A 6/26 AWG, Black PUR 80°C 4.5 mm OD	1. Bn 2. Wh 3. Bu 4. Bk 5. Cy 6. Pk	PKG 6Z-*/S90	PKW 6Z-*/S90	PSG 6-*/S90	- - - -


Note: See page C46 for Snap Lock connector instructions.




PKG ..M - ..



PKW ..M - ..



PSG ..M - ..



PSW ..M - ..

### Threaded, 3 and 4-pin

Application	Specifications	Pinout	Female		Male	
			Straight	Right Angle	Straight	Right Angle
Threaded, 3-wire PUR cable CSA	125 VAC/DC 4.0 A 3/24 AWG, Black PUR 80°C 4.4 mm OD	1. Bn 3. Bu 4. Bk	PKG 3M-*/S90	PKW 3M-*/S90	PSG 3M-*/S90	PSW 3M-*/S90
Threaded, 4-wire PUR cable CSA	125 VAC/DC 2.0 A 4/26 AWG, Black PUR 80°C 4.4 mm OD	1. Bn 2. Wh 3. Bu 4. Bk	PKG 4M-*/S90	PKW 4M-*/S90	PSG 4M-*/S90	PSW 4M-*/S90


\* = Length in meters

## Specifications

<b>Connector:</b>	Oil resistant polyurethane body material.
<b>Contact Carrier:</b>	Nylon or PUR.
<b>Contacts:</b>	Gold plated brass.
<b>Coupling Nuts:</b>	Nickel plated brass (threaded versions only).
<b>Locking Sleeve:</b>	POM (snap lock version only).
<b>Cable:</b>	See table.
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 67.
<b>Cable Length:</b>	Standard cable lengths are nominal 2, 4 and 6 meters. Other lengths available by request - consult factory.


## Dimensions

PKG .. Z-..

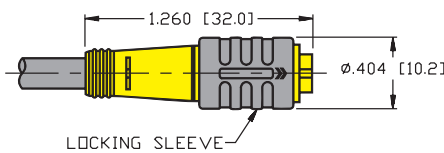


Female Connector, Snap Lock

PKW .. Z-..

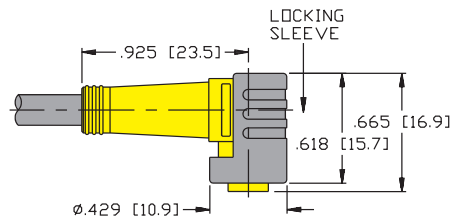


Female Connector, Snap Lock

PSG .. - ..




Male Connector, Snap Lock

PKG ..M - ..

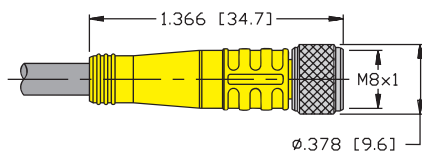


Female Connector, Threaded

PSG ..M - ..

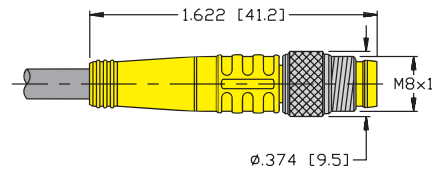


Male Connector, Threaded

PKW ..M - ..

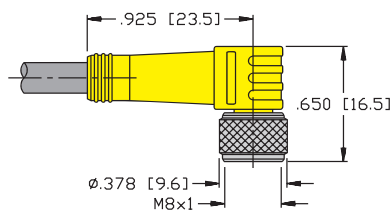

Female Connector, Threaded

PSW ..M - ..

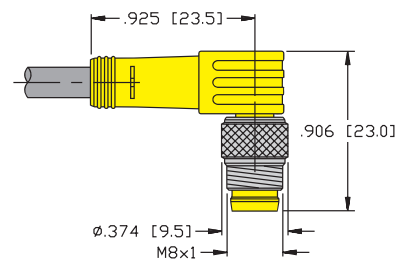

Male Connector, Threaded

## Pinouts

Female			Male		
3-pin	4-pin	6-pin	3-pin	4-pin	6-pin