5 and 6-Wire *minifast*® Cordsets, Heavy Duty

- **Straight Male Connectors**
- **NEMA 1, 3, 4, 6P and IEC IP 67 Protection**
- **600 V, 9 A**

Housing Style	Part Number	Cable	Features	Pinout	
RSM .. 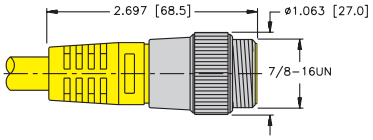	RSM 55-*M	**STOW PVC Yellow 5x16 AWG 105°C 13.2 mm OD Cable #RF50540-*M†**	***flexlife***®	1. RD/WH 2. RD/BU 3. GN 4. RD/OG 5. RD/BK	
	RSM 55-*M/S600	**SOOW CPE Yellow 5x16 AWG 105°C 13 mm OD Cable #RF50597-*M†**	***Weld Flash Immune, Flame Immune***	1. RD 2. RD 3. GN 4. RD 5. RD	
	RSM 56-*M	**STOW PVC Yellow 5x16 AWG 105°C 13.2 mm OD Cable #RF50539-*M†**	***flexlife***	1. WH 2. RD 3. GN 4. OG 5. BK	
	RSM 56-*M/S1587	**STOW TPE Yellow 5x16 AWG 105°C 13.2 mm OD Cable #RF51265-*M†**	***weldlife, Weld Flash Immune***		
	RSM 56D-*M/S1062	**STOW PVC Yellow 5x16 AWG 105° C 13.2 mm OD Cable #RF50539-*M†**	***flexlife® Cable, PVC plug body with PVC contact carriers***		
	RSM 66-*M	**STOW PVC Yellow 6x16 AWG 105°C 13.2 mm OD Cable #RF50565-*M†**	***flexlife***	1. WH 2. RD 3. GN 4. OG 5. BK 6. BU	
	RSM 66D-*M/S1062	**STOW PVC Yellow 6x16 AWG 105° C 13.2 mm OD Cable #RF50565-*M†**	***flexlife® Cable, PVC plug body with PVC contact carriers***		

* Length in Meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters. Consult factory for other lengths.
Standard coupling nut material is nickel plated brass "RSM ..."; "RS ..." indicates nylon and "RSV ..." indicates 316 stainless steel.
† See Section N for ***reelfast***® cable information.

5 and 6-Wire *minifast*® Cordsets, Heavy Duty

- **Straight Female Connectors**
- **NEMA 1, 3, 4, 6P and IEC IP 67 Protection**
- **600 V, 9 A**

Housing Style	Part Number	Cable	Features	Pinout	
RKM .. 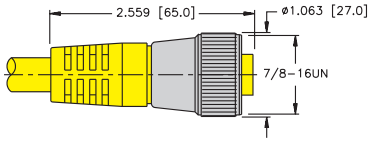	RKM 55-*M	**STOW PVC Yellow 5x16 AWG 105°C 13.2 mm OD Cable #RF50540-*M†**	***flexlife®***	1. RD/WH 2. RD/BU 3. GN 4. RD/OG 5. RD/BK	
	RKM 55-*M/S600	**SOOW CPE Yellow 5x16 AWG 105°C 13 mm OD Cable #RF50597-*M†**	***Weld Flash Immune, Flame Immune***	1. RD 2. RD 3. GN 4. RD 5. RD	
	RKM 56-*M	**STOW PVC Yellow 5x16 AWG 105°C 13.2 mm OD Cable #RF50539-*M†**	***flexlife***	1. WH 2. RD 3. GN 4. OG 5. BK	
	RKM 56-*M/S1587	**STOW TPE Yellow 5x16 AWG 105°C 13.2 mm OD Cable #RF51265-*M†**	***weldlife, Weld Flash Immune***		
	RKM 56D-*M/S1062	**STOW PVC Yellow 5x16 AWG 105° C 13.2 mm OD Cable #RF50539-*M†**	***flexlife® Cable, PVC plug body with PVC contact carriers***	1. WH 2. RD 3. GN 4. OG 5. BK	
	RKM 66-*M	**STOW PVC Yellow 6x16 AWG 105°C 13.2 mm OD Cable #RF50565-*M†**	***flexlife***	1. WH 2. RD 3. GN 4. OG 5. BK 6. BU	
	RKM 66D-*M/S1062	**STOW PVC Yellow 6x16 AWG 105° C 13.2 mm OD Cable #RF50565-*M†**	***flexlife® Cable, PVC plug body with PVC contact carriers***	1. WH 2. RD 3. GN 4. OG 5. BK 6. BU	

* Length in Meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters. Consult factory for other lengths.
Standard coupling nut material is nickel plated brass "RKM .."; "RK .." indicates nylon and "RKV .." indicates 316 stainless steel.
† See Section N for ***reelfast***® cable information.