



# TURCK

## Industrial Connectivity Products

### 2 and 3-Wire *minifast*® Receptacles, Front Mount, 1/2-14 NPT Threads

- Male Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection
- 600 V, 9 A



Drawing Number	Part Number	Lead Specs.	Features	Pinout
 <p>RSF ../NPT</p>	RSF 20-*M/NPT	UL, CSA 2x18 AWG 105°C	1/2-14NPT Threads, Standard Duty	1. BN 2. BU
	RSF 26-*M/NPT	UL, CSA 2x16 AWG Leads 105°C	1/2-14NPT Threads, Heavy Duty	1. WH 2. BK
	RSF 28-*M/NPT	UL, CSA 2x18 AWG 105°C 600 V, 9 A	1/2-14NPT Threads, Heavy Duty	1. WH 2. BK
	RSF 30-*M/NPT	UL, CSA 3x18 AWG 105°C	1/2-14NPT Threads, Standard Duty	1. GY/YE 2. BN 3. BU
	RSF 31-*M/NPT	UL, CSA 3x18 AWG 105°C	1/2-14NPT Threads, Standard Duty	1. BK 2. BN 3. BU
	RSF 311-*M/NPT	UL, CSA 3x18 AWG 105°C	Automotive Color Code 1/2-14NPT Threads	
	RSF 35-*M/NPT	UL, CSA 3x16 AWG 105°C	Automotive Color Code 1/2-14NPT Threads	
	RSF 36-*M/NPT	UL, CSA 3x16 AWG 105°C	1/2-14NPT Threads, Heavy Duty	1. GN 2. BK 3. WH
	RSF 38-*M/NPT	UL, CSA 3x18 AWG 105°C 600 V, 9 A	1/2-14NPT Threads, Heavy Duty	1. GN 2. BK 3. WH

See page E59 for dimensional drawings.

Standard lead length is 0.3 Meters. Consult factory for other lengths.


Receptacles require a 13/16" (21 mm) clearance hole for panel mounting.

Standard housing material is nickel plated cast zinc. "RSF .."; "RSFV .." indicates 316 stainless steel housing.

For locknuts to be included, add "W/LN" to the end of the part number.


To specify PVC jacketed cable, add "/S717" to the end of the part number.

**minifast® Standard Male Receptacles NPSM and NPT**

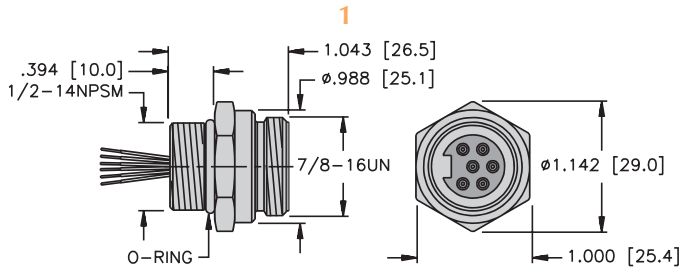

RSF ..


Page E63 - E66

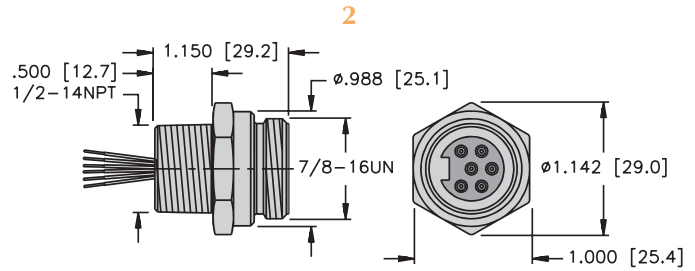

RSF ..NPT


Page E71 - E73

**minifast® "B" Style Male Receptacles 1/2-14NPT and 3/4-14NPT**

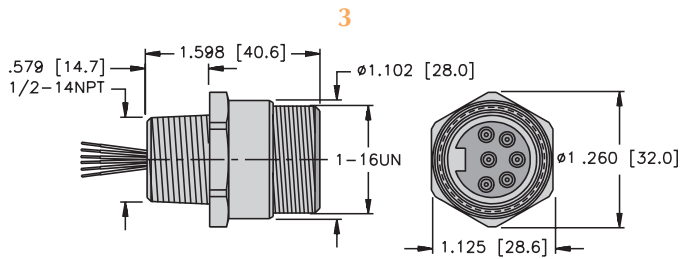

"B" Style RSF ..1/2-14NPT


Page E76

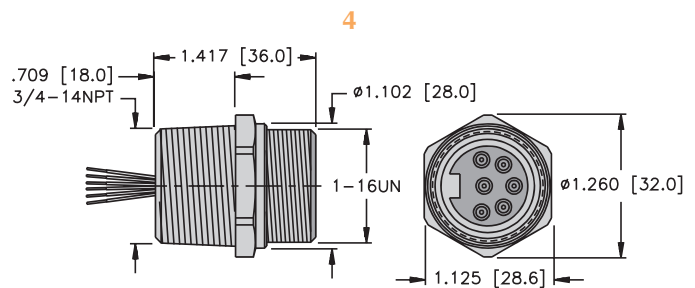

"B" Style RSF ..3/4-14NPT


Page E76

**minifast® "C" Style Female Receptacles 1/2-14NPT and 3/4-14NPT**

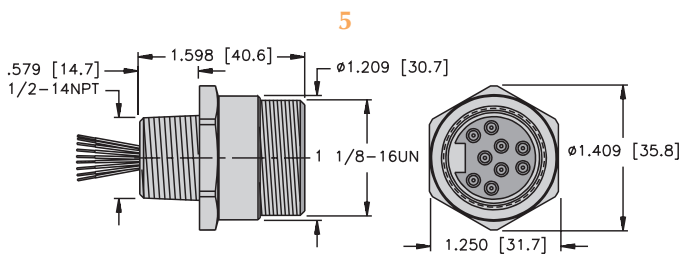

"C" Style RSF ..1/2-14NPT

Page E77

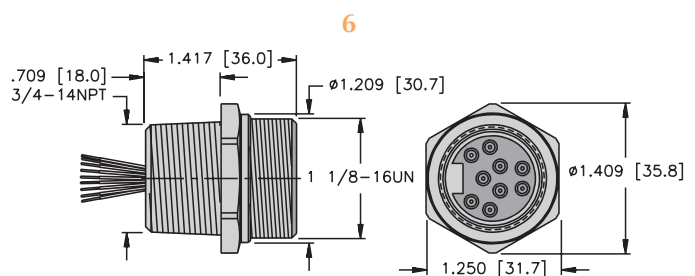

"C" Style RSF ..3/4-14NPT

Page E77