

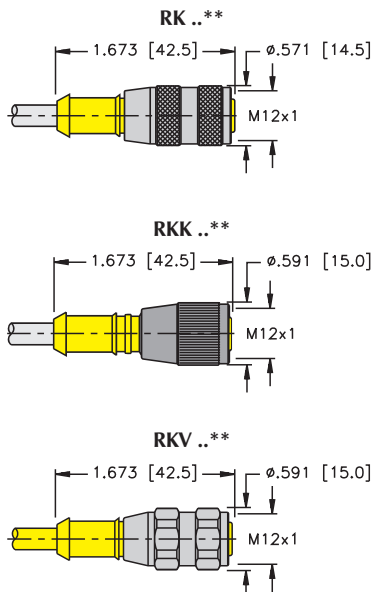


6-Wire M12 eurofast® Cordsets, Standard Plug Body

- Straight Female Connector
- NEMA 1, 3, 4, 6P
- IEC IP 68 Protection
- 250 V, 4 A



Housing Style	Part Number	Cable	Features	Pinout
 <p><b>RK ..**</b> 1.673 [42.5]    <math>\phi</math>0.571 [14.5] M12x1</p> <p><b>RKK ..**</b> 1.673 [42.5]    <math>\phi</math>0.591 [15.0] M12x1</p> <p><b>RKV ..**</b> 1.673 [42.5]    <math>\phi</math>0.591 [15.0] M12x1</p>	RK 4.6T-*	AWM PVC Grey 6x24 AWG 105°C 5.7 mm OD Cable #RF50608-*M <sup>†</sup>	<i>flexlife</i> ®	
	RK 4.6T-*/S90	AWM PUR Grey 6x24 AWG 105°C 5.7 mm OD Cable #RF50646-*M <sup>†</sup>	<i>Cut/Abrasion Immune</i>	
	RK 4.6T-*/S90/S760	AWM PUR Black 6x24 AWG 105°C 5.7 mm OD Cable #RF50728-*M <sup>†</sup>		
	RK 4.6T-*/S618	AWM PVC Grey 6x24 AWG Foil/Drain 105°C 5.7 mm OD Cable #RF50610-*M <sup>†</sup>	<i>RFI/EMI Shielding</i>	
	RK 4.6T-*/S653	AWM PVC Grey 5x22 AWG Foil/Drain 105°C 5.7 mm OD Cable #RF50609-*M <sup>†</sup>		

Cordsets

\* Length in meters. Standard cable lengths are 2, 4, 6, 8 and 10 meters. Consult factory for other lengths.  
 \*\* Standard coupling nut material is nickel plated brass "RK .."; "RKK .." indicates nylon and "RKV .." indicates 316 stainless steel.  
 † See Section N for *reelfast*® cable information.