
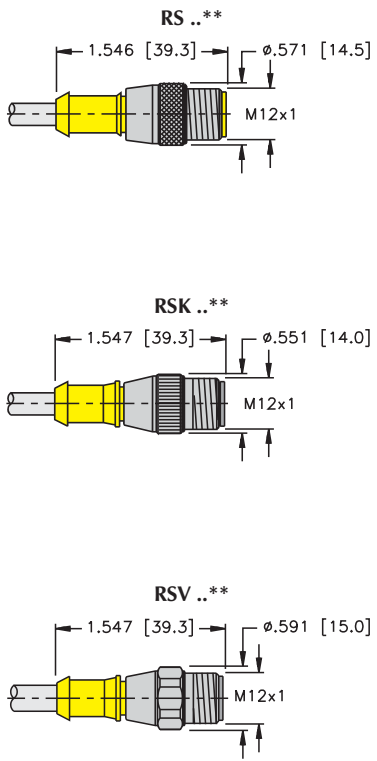


4-Wire M12 eurofast® Cordsets, Standard Plug Body

- Straight Male Connector
- NEMA 1, 3, 4, 6P
- IEC IP 68 Protection
- 250 V, 4 A



Housing Style	Part Number	Cable	Features	Pinout
	RS 4.4T-*/S653	AWM PVC Grey 3x20 AWG Foil/Drain 105°C 5.7 mm OD Cable #RF50611- [†] M [†]	RFI/EMI Shielding	
	RS 4.4T-*/S760	AWM PVC Black 4x22 AWG 105°C 5.2 mm OD Cable #RF50983- [†] M [†]	flexlife®	
	RS 4.4T-*/S90/S670	AWM PUR Black 4x26 AWG 105°C 4.4 mm OD Cable #RF50586- [†] M [†]	Cut/Abrasion Immune	
	RS 4.4T-*/S1587	AWM TPE Yellow 4x22 AWG 80°C 5.2 mm OD Cable #RF51132- [†] M [†]	Weldlife, Weld Flash Immune	
	RS 4.4T-*/X0R	AWM PVC Yellow 4x20 AWG 80°C 250°C short term 5.2 mm OD Cable #RF04304- [†] M [†]	Weld Flash Immune, High Temperature Resistance	
	RS 4.4T-*/S1666	AWM PUR Grey 2: 2x22 AWG STP Foil/Drain 105°C 6.2 mm OD Cable #RF51069- [†] M [†]	Cut/Abrasion Immune, Shielded Twisted Pair for Communication	

Cordsets

* Length in meters. Standard cable lengths are 2, 4, 6, 8 and 10 meters. Consult factory for other lengths.

** Standard coupling nut material is nickel plated brass "RS .."; "RSK .." indicates nylon and "RSV .." indicates 316 stainless steel.

† See Section N for **reelfast**® cable information.