
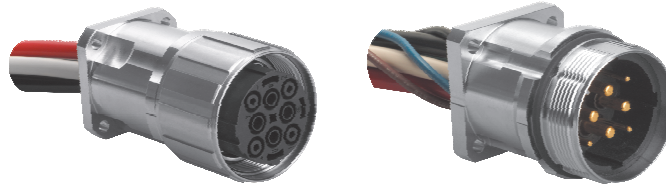





4-Wire M40 *powerfast™* Receptacles, Assembled Flange

- Female & Male Receptacles
- IEC IP 67 Protection



Housing Style	Part Number	Lead Specs	Features	Pinout	
<p>15</p> 	HKFMF 4800-*	4x8 AWG 90°C 600 V, 40 A	<i>Demanding Power Applications</i>	V. WH U. BK W. RD ⊥. GN	
<p>16</p> 	HSFF 4800-*				


See page J70 for dimensional drawings.

* Length in meters.

Standard housing material is nickel plated brass.

M40 powerfast™ Receptacles


15

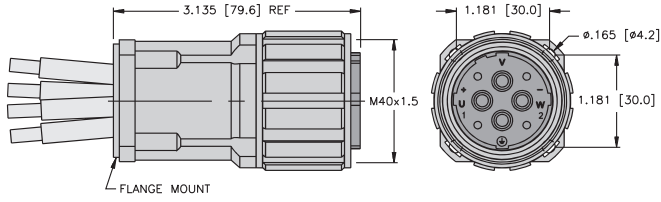

HKFMF ..

Page J71 - J72

16

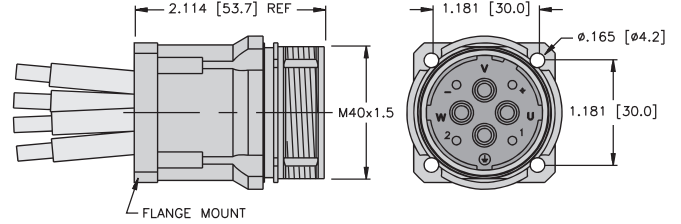

HSFF ..

Page J71 - J72