

8-Wire M40 powerfast™ Receptacles, Assembled Flange

- Female & Male Receptacles
- IEC IP 67 Protection



Housing Style	Part Number	Lead Specs	Features	Pinout
<p>15</p>	HKFMF 4848-*	4x8 AWG, 4x18 AWG 90°C 600 V, 42 A (V, U, W, ⊥) 300 V, 28 A (+, 1, 2, -)	<i>Demanding Power Applications</i>	
<p>16</p>	HSFF 4848-*			


Receptacles

See page J70 for dimensional drawings.

* Length in meters. Standard lead lengths are 1 and 2 meters. Consult factory for other lengths. Standard housing material is nickel plated brass.

M40 powerfast™ Receptacles


15

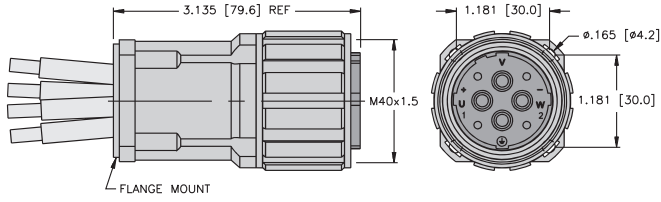

HKFMF ..

Page J71 - J72

16

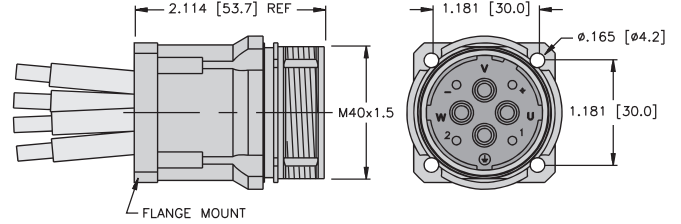

HSFF ..

Page J71 - J72