
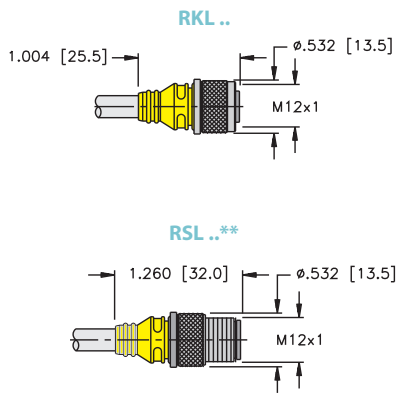



## 3 and 4-Wire Cordsets, "L" Style Compact Plug Body

- NEMA 1, 3, 4, 6P
- IEC IP68 Protection
- 250 V, 4 A



Connector Style	Female Part Number	Male Part Number	Features	Pinout
 <p><b>RKL..</b></p> <p><b>RSL..**</b></p>	RKL 4-*	RSL 4-*	AWM PVC Grey, 3x20 AWG, 105°C, 5.1 mm OD, Cable #RF50528-*M <sup>†</sup> , flexlife <sup>°</sup>	<b>Female</b> 
	RKL 4-*/S90	RSL 4-*/S90	AWM TPU Grey, 3x22 AWG, 90°C, 5.1 mm OD, Cable #RF50518-*M <sup>†</sup> , Cut/Abrasion Immune	
	RKL 4.4-*	RSL 4.4-*	AWM PVC Grey, 4x22 AWG, 105°C, 5.1 mm OD, Cable #RF50516-*M <sup>†</sup> , flexlife	<b>Male</b> 
	RKL 4.4-*/S90	RSL 4.4-*/S90	AWM TPU Grey, 4x22 AWG, 90°C, 5.1 mm OD, Cable #RF50532-*M <sup>†</sup> , Cut/Abrasion Immune	
	RKL 4.4-*/S715	RSL 4.4-*/S715	AWM PVC Yellow, 4x22 AWG, 105°C, 5.1 mm OD, Cable #RF50530-*M <sup>†</sup> , flexlife	

Cordsets

<sup>°</sup> Length in meters. Standard cable lengths are 2, 4, 6, 8 and 10 meters. Consult factory for other lengths.  
<sup>\*\*</sup> Standard coupling nut material is nickel plated brass "RKL..".  
<sup>†</sup> See Section N for **reelfast**® cable information.