


TURCK Valve Connector Products

Valve Connectors, Type "I" (11 mm)

- Available with PVC, PUR and Rubber Jacket
- 18 and 24 AWG
- 2 Conductors + Ground



**All parts except "E".



Type I

"I" Style Valve Connectors, Standard Color Code

Application	Cable Specs	Pinout	Voltage VAC/DC	Straight Wired	Indicator LED	Indicator LED and MOV**	Indicator LED and Diode - DC only
Standard duty PVC	3/18 AWG, Grey PVC 105°C 6.2 mm OD Black Body	1. BK 1 2. BK 2 Gnd - GN/YE	0-220 24-48 110-220	VIS 2-A653-*M	- - - -	- - - -	- - - -
				- - - -	VIS 2-B653-*M	VIS 2-D653-*M	VIS 2-F653-*M
				- - - -	VIS 2-C653-*M	VIS 2-E653-*M	- - - -
Standard duty PUR	3/18 AWG, Grey PUR 80°C 6.2 mm OD Black Body	1. BK 1 2. BK 2 Gnd - GN/YE	0-220 24-48 110-220	VIS 2-A669-*M	- - - -	- - - -	- - - -
				- - - -	VIS 2-B669-*M	VIS 2-D669-*M	VIS 2-F669-*M
				- - - -	VIS 2-C669-*M	VIS 2-E669-*M	- - - -

"I" Style Valve Connectors, IEC Color Code

Application	Cable Specs	Pinout	Voltage VAC/DC	Straight Wired	Indicator LED	Indicator LED and MOV**	Indicator LED and Diode - DC only
Small diameter PVC	3/24 AWG, Yellow PVC 105°C 4.4 mm OD Black Body	1. BN 2. BU Gnd - BK	0-220 24-48 110-220	VIS 2-A642-*M	- - - -	- - - -	- - - -
				- - - -	VIS 2-B642-*M	VIS 2-D642-*M	VIS 2-F642-*M
				- - - -	VIS 2-C642-*M	VIS 2-E642-*M	- - - -
Small diameter PUR	3/24 AWG, Black PUR 80°C 4.2 mm OD Black Body	1. BN 2. BU Gnd - BK	0-220 24-48 110-220	VIS 2-A587-*M	- - - -	- - - -	- - - -
				- - - -	VIS 2-B587-*M	VIS 2-D587-*M	VIS 2-F587-*M
				- - - -	VIS 2-C587-*M	VIS 2-E587-*M	- - - -
Rubber	3/18 AWG, Yellow CPE SJOOW, 105°C 8.0 mm OD Black Body	1. BN 2. BU Gnd - BK	0-220 24-48 110-220	VIS 2-A654-*M	- - - -	- - - -	- - - -
				- - - -	VIS 2-B654-*M	VIS 2-D654-*M	VIS 2-F654-*M
				- - - -	VIS 2-C654-*M	VIS 2-E654-*M	- - - -

"I" Style Valve Connectors, Automotive Color Code

Application	Cable Specs	Pinout	Voltage VAC/DC	Straight Wired	Indicator LED	Indicator LED and MOV**	Indicator LED and Diode - DC only
Rubber	3/18 AWG, Yellow CPE SJOOW, 105°C 8.0 mm OD Yellow Body	1. RD 1 2. RD 2 Gnd - GN	0-220 24-48 110-220	VIY 2-A658-*M	- - - -	- - - -	- - - -
				- - - -	VIY 2-B658-*M	VIY 2-D658-*M	- - - -
				- - - -	VIY 2-C658-*M	VIY 2-E658-*M	- - - -


* Length in meters

Specifications

- Connector:** Oil resistant polyurethane body material, Nylon contact carrier.
- Contacts:** Silver plated copper alloy.
- Cable:** See table.
- Cable length:** Standard cable lengths are nominal 2, 5 and 10 meters. Other lengths available by request - consult factory.
- Protection Class:** NEMA 1,3,4,6P and IEC IP 67 when connected and secured.

Options: Grey connector body available (special order), change part number VIS .. or VIY .. to VIG ..
 To have cable exit on the same side as the ground pin, change part number from VIS .. to TIS ..
 For other combinations or options, consult factory.

Dimensions

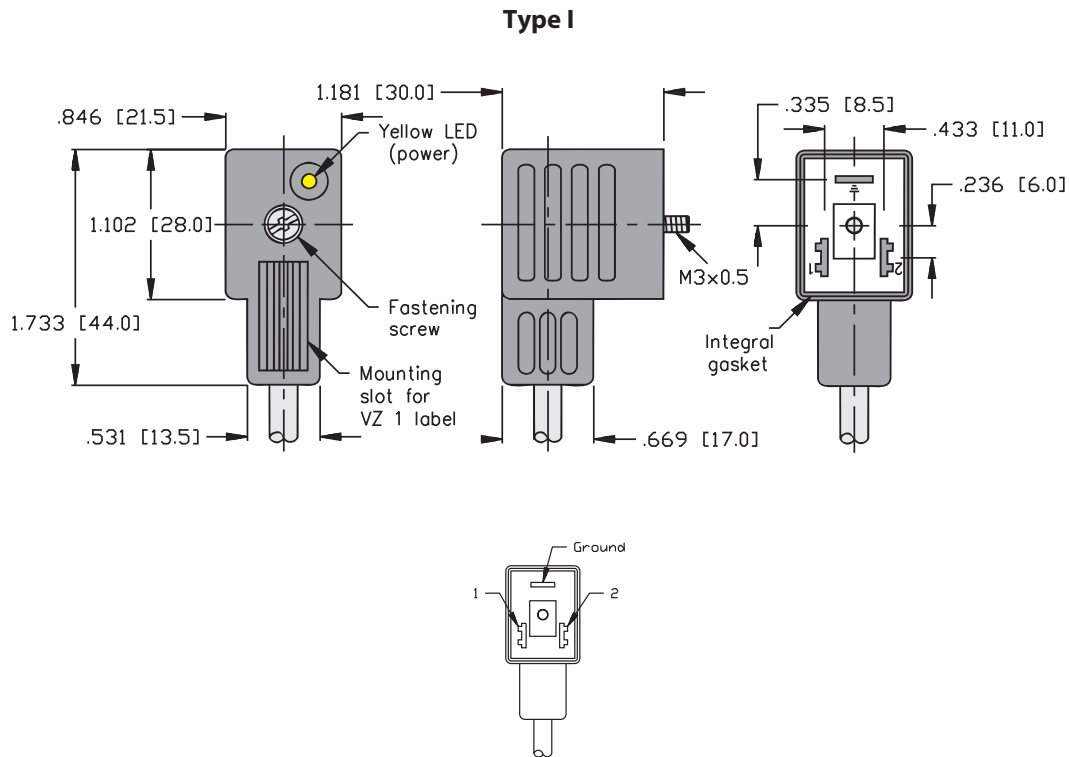

Wiring Diagrams

Straight Wired (A)	Indicator LED (B, C)	Indicator LED and MOV (D, E)	Indicator LED and Diode - DC (F)
<p>1) _____</p> <p>2) _____</p> <p>GND) _____</p>			<p>DC ONLY</p>