

# TURCK

## Process Wiring Solutions

### minifast® Receptacles with Leads, 2-Wire Analog or HART Control Circuits

- Female Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection




Housing Style	Part Number	Lead Specs	Features	Pinout	
	P-RKF 30-*	UL, CSA 2x18 AWG 105°C 600 V, 9A	1/2-14NPSM	1. BU 2. BN 3. N/C	
	P-RKF 30D-*	UL, CSA 3x18 AWG 105°C 600 V, 9A	1/2-14NPSM Threads, Drain Wire	1. BU 2. BN 3. GY	
	P-RKF 321-*	UL, CSA 3x18 AWG 105°C 600 V, 9A	1/2-14NPSM Threads	1. GN/YE 2. BN 3. BU	
	P-RKF 40-*	UL, CSA 3x18 AWG 105°C 600 V, 9A	1/2-14NPSM Threads	1. BU 2. BN 3. N/C 4. GN/YE	
	P-RKF 40D-*	UL, CSA 4x18 AWG 105°C 600 V, 9A	1/2-14NPSM Threads, Drain Wire	1. BU 2. BN 3. GY 4. GN/YE	

See page B53 for dimensional drawings.

\* Length in meters. Standard lead length is 0.3 meters. Consult factory for other lengths.  
 Standard housing material is nickel plated brass "P-RKF.."; "P-RKFV.." indicates 316 stainless steel.  
 Receptacles recommend 13/16" (21.0 mm) hole for panel mounting.  
 Note: See **TURCK** Control Drawing QCF-00147(www.turck.com/fmcd) for guidance on installation in hazardous locations.

*minifast*<sup>®</sup> Receptacles with Leads, 2-Wire Analog or HART Control Circuits


1

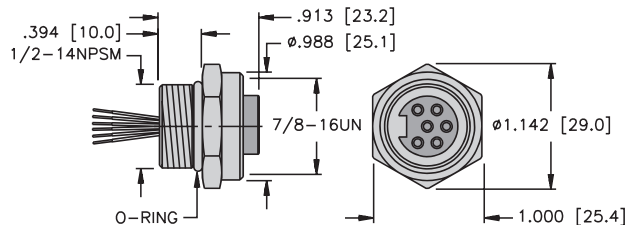

**P-RKF ..**

**Page B55**


2

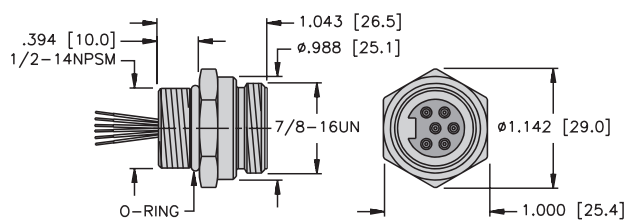

**P-RSF ..**

**Page B56**


3

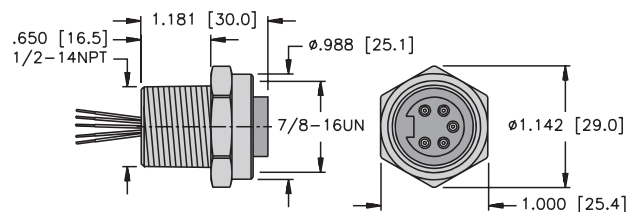

**P-RKF .. 14.5/NPT**

**Page B57**


4

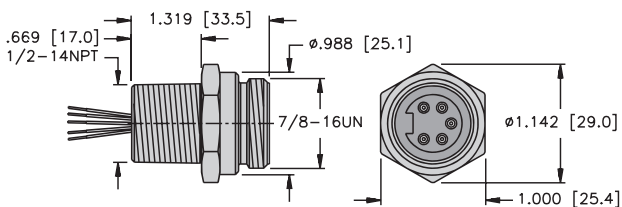

**P-RSF .. 14.5/NPT**

**Page B58**


5

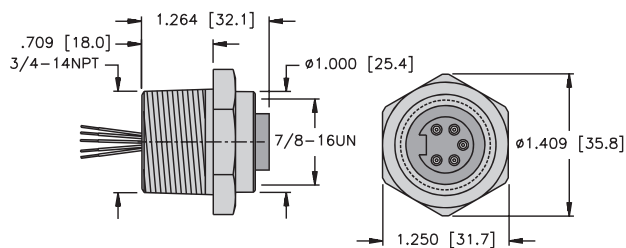

**P-RKF .. 14.75/NPT**

**Page B59**


6

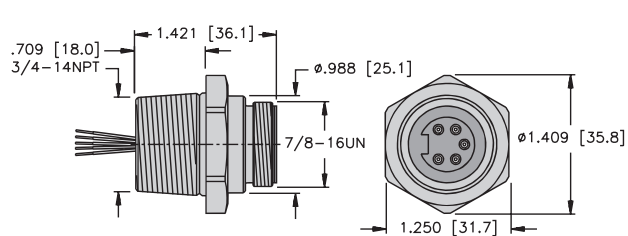

**P-RSF .. 14.75/NPT**

**Page B60**


7

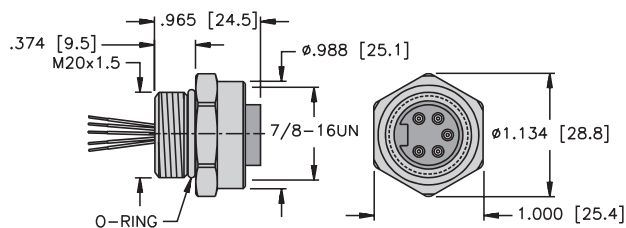

**P-RKF .. M20**

**Page B61**

8

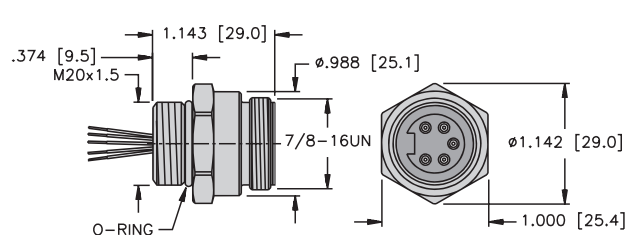

**P-RSF .. M20**

**Page B62**