

minifast® Receptacles with Leads, 2-Wire Analog or HART Control Circuits

- Male Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Housing Style	Part Number	Lead Specs	Features	Pinout
	P-RSF 30-*/14.5/NPT	UL, CSA 2x18 AWG 105°C 600 V, 9A	1/2-14NPT Threads	1. BU 2. BN 3. N/C
	P-RSF 30D-*/14.5/NPT	UL, CSA 3x18 AWG 105°C 600 V, 9A	1/2-14NPT Threads, Drain Wire	1. BU 2. BN 3. GY
	P-RSF 321-*/14.5/NPT		1/2-14NPT Threads	1. GN/YE 2. BN 3. BU
	P-RSF 40-*/14.5/NPT	UL, CSA 3x18 AWG 105°C 600 V, 9A	1/2-14NPT Threads	1. BU 2. BN 3. N/C 4. GN/YE
	P-RSF 40D-*/14.5/NPT	UL, CSA 4x18 AWG 105°C 600 V, 9A	1/2-14NPT Threads, Drain Wire	1. BU 2. BN 3. GY 4. GN/YE


minifast Receptacles

See page B53 for dimensional drawings.

* Length in meters. Standard lead length is 0.3 meters. Consult factory for other lengths.
 Standard housing material is nickel plated brass "P-RSF.."; "P-RSFV.." indicates 316 stainless steel.
 Receptacles recommend 13/16" (21.0 mm) hole for panel mounting.
 Note: See TURCK Control Drawing QCF-00147(www.turck.com/fmcd) for guidance on installation in hazardous locations.

minifast[®] Receptacles with Leads, 2-Wire Analog or HART Control Circuits


1

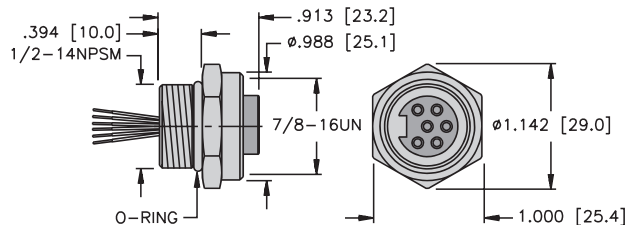

P-RKF ..

Page B55


2

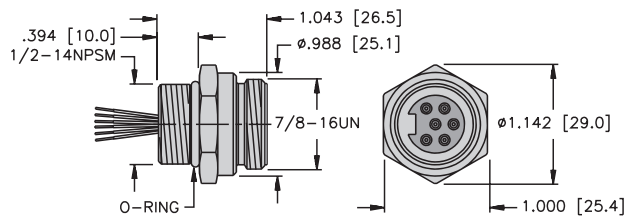

P-RSF ..

Page B56


3

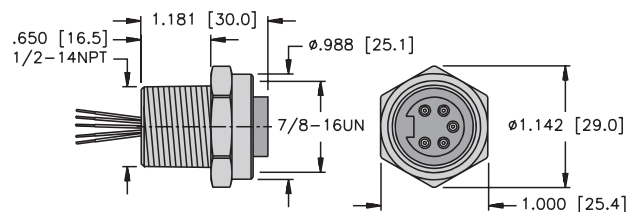

P-RKF .. 14.5/NPT

Page B57


4

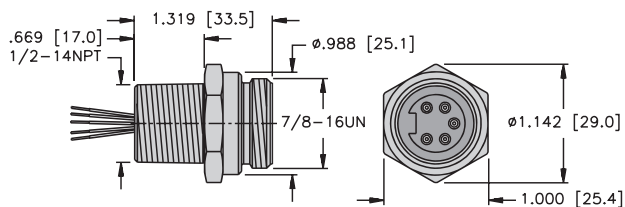

P-RSF .. 14.5/NPT

Page B58


5

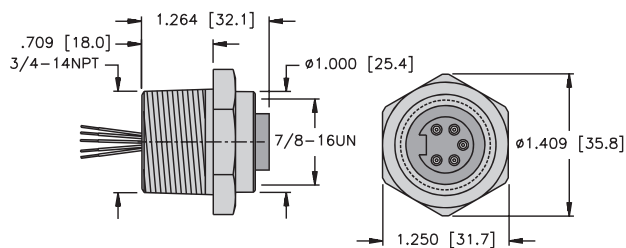

P-RKF .. 14.75/NPT

Page B59


6

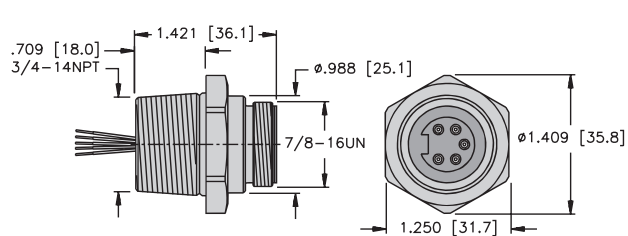

P-RSF .. 14.75/NPT

Page B60


7

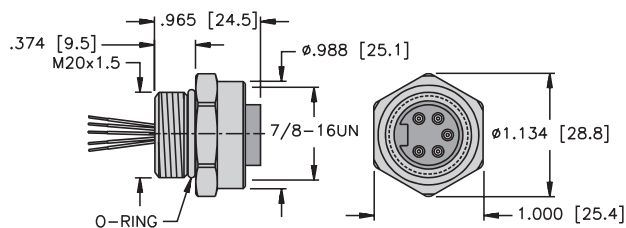

P-RKF .. M20

Page B61

8

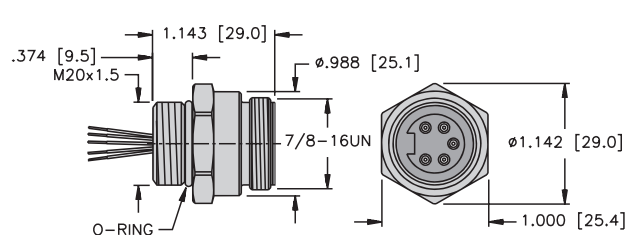

P-RSF .. M20

Page B62