SUPER-SAFEWAY® MULTIPLE OUTLET BOXES — INDUSTRIAL GRADE

MULTI-TAP® OUTLET BOX WITH BUSS BARS

NEōTEX® rubber box with built-in copper buss bars. Molded-in cord grip and polycarbonate outlets. Rubber plug included (plug same as receptacle). Cord range (for box only) .325-.655 inches.



31593A123

Box w/ 3 Outlets Each Rated:	Face View	NEMA Conf.	Pre-wired Box Only	Pre-Wired Box 12-3 SOW 25ft.	Pre-Wired Box 12-3 SOW 50ft.	Pre-Wired Box 14-3 SOW 25ft.	Pre-Wired Box 14-3 SOW 50ft.
2P 2W 15A-125V		1-15	**31550**	**31550A122**	**31550B122**	**31550A142**	**31550B142**
3P 3W 15A-125V/ 10A-250V		Non-NEMA	**31552**	**31552A123**	**31552B123**	**31552A143**	**31552B143**
2P 3W 20A-125V		5-20	**31565**[1]	**31565A123**	**31565B123**	**31565A143**	**31565B143**
2P 3W 15A-125V		5-15	**31593**[1]	**31593A123**	**31593B123**	**31593A143**	**31593B143**
2P 3W 15A-250V		6-15	**31594**	**31594A123**	**31594B123**	**31594A143**	**31594B143**
2P 3W 15A-125V		L5-15	**32547**[1]	**32547A123**	**32547B123**	**32547A143**	**32547B143**
2P 2W 15A-125V		L1-15	**32550**	**32550A122**	**32550B122**	**32550A142**	**32550B142**
3P 3W 15A-125V/ 10A-250V		Non-NEMA	**32553**	**32553A123**	**32553B123**	**32553A143**	**32553B143**
2P 2W 20A-250V		L2-20	**32706**	**32706A122**	**32706B122**	**32706A142**	**32706B142**
3P 3W 20A-125V/ 250V		Non-NEMA	**32708**	**32708A123**	**32708B123**	**32708A143**	**32708B143**
2P 3W 20A-125V		L5-20	**32747**[1]	**32747A123**	**32747B123**	**32747A143**	**32747B143**

[1]To order with ground continuity monitor, add "GCM" suffix to Woodhead number (e.g., 31593 GCM).
Note: Other combinations of cord and receptacles available on special order. Consult factory.
For dimensional information, see page 208.
For GFCI protection: Add "PLG" suffix for addition of 15 Amp, 120 Volt GFCI plug. Add "IN" suffix for addition of 15-20 Amp, 120/240 Volt in-line GFCI.

MULTI-TAP® STRIP AND CORDSET

U.L. Listed. Two-piece nylon box with Woodhead's industrial grade duplex receptacles and MAX-LOC® cord grip (F2). Brass ground buss bar. Two or three 15A straight-blade duplex receptacles with manual reset type circuit breaker. Yellow unit wired with 8ft. SY 14/3 cord with 3-prong, straight-blade, right-angle plug. Black version wired with 8ft. SY 14/3 cord with 3-prong, straight-blade, straight-body plug.

3510

Description	Face View	NEMA Conf.	Yellow	With Surge Protection	With GFCI Plug	With Surge Protection and GFCI Plug
Box w/ 2 2P 3W 15A duplex receptacles		5-15	**3500**	**3500S**	**3500PLG**	**3500SPLG**
Box w/ 3 duplex receptacles		5-15	**3510**	**3510S**	**3510PLG**	**3510SPLG**
Box w/ 2 hospital grade duplex receptacles		5-15	**3505**	**3505S**	**3505PLG**	**3505SPLG**

For dimensional information, see page 208.

Super-Safeway, Multi-Tap, MAX-LOC and NEōTEX are registered trademarks of Woodhead Industries, Inc.

SUPER-SAFEWAY® MULTIPLE OUTLET BOXES — DIMENSIONS: INCH(CM)

MULTI-TAP® OUTLET BOX WITH BUSS BARS

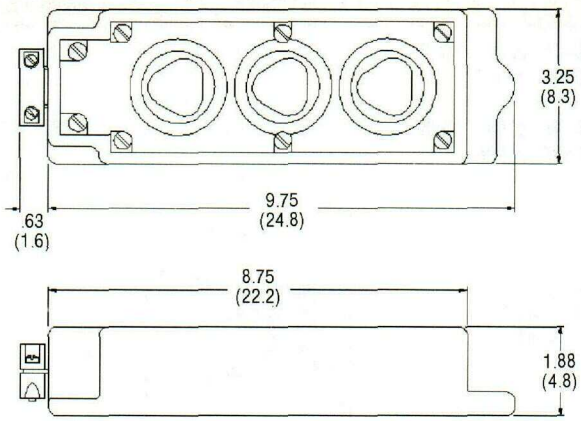

MULTI-TAP® STRIP AND CORDSET

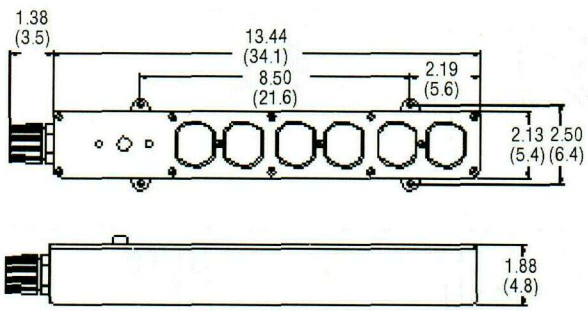

"ANGLED" MULTIPLE OUTLET BOX

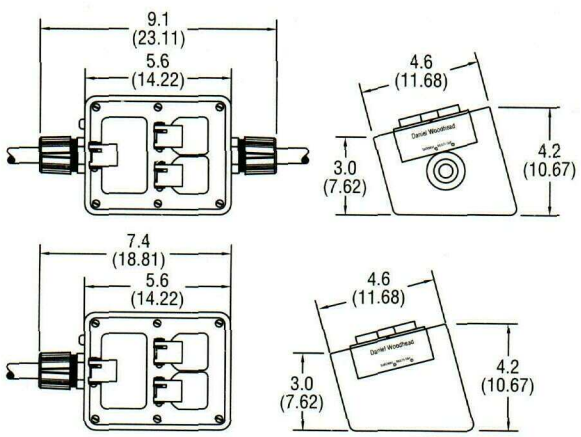

Multi-Tap and Super-Safeway are registered trademarks of Woodhead Industries, Inc.