

TYPES YAE-Z BOX AND YAE-Z



INSULUG™

TERMINAL -
NYLON INSULATED,
FLANGED FORK

MULTI-FINGER
INSULATION GRIP

300 VOLTS MAX. 105° C MAX

INSULUG™ type YAE-Z is identical to type YAE-N and employs a flanged fork tongue for faster installation while maintaining security if supporting screw becomes loose.

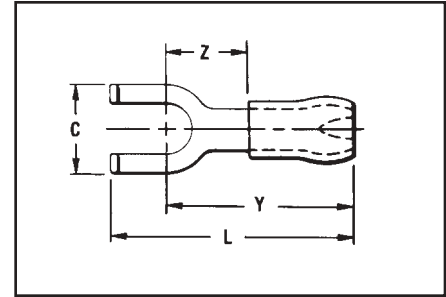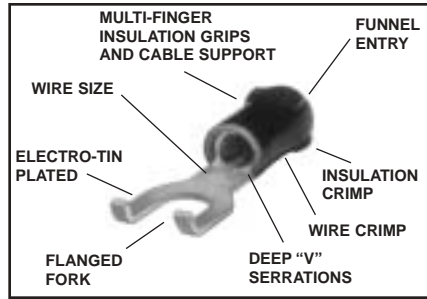

Features and Benefits

- Flanged fork.
 - ◇ Permits rapid, easy installation of the terminal under the screw head without complete removal of the screw. Additionally, it may not be removed with only a slight loosening of the screw.



CATALOG NUMBER	WIRE RANGE	STUD SIZE	DIMENSIONS				BULK CATALOG NUMBER	INSTALLATION TOOLING	TAPE MOUNTED CATALOG NO. 2000/Reel	INSTALLATION TOOLING	WIRE STRIP LENGTH
			C	Z MAX.	Y MAX.	L MAX.					
YAE22Z1 BOX	26-20 Max. Insul.	1-2	.18	.24	.65	.75	YAE22Z1	M8ND with N14HET-25V1 Die Y10D, Y10-22	YAE22Z1M	TFM with	5/32"
YAE22Z2 BOX	Dia.: .098"	4-6	.28	.28	.70	.83	YAE22Z2		YAE22Z2M	DFM11D1	
YAE22Z3 BOX	Sleeve Color: Amber	6-8	.31	.30	.72	.92	YAE22Z3		YAE22Z3M	Die	
YAE18Z1 BOX	22-16 Max. Insul.	1-2	.18	.22	.73	.83	YAE18Z1	MR8-33T-1, M8ND with one of the following Dies: N14HET-15, N10HET-9, Y10D, Y10-22	YAE18Z1M	TFM	3/16"
YAE18Z2 BOX	Dia. Accom.: (125)	4-6	.28	.26	.76	1.00	YAE18Z2		YAE18Z2M	with	
YAE18Z3 BOX	Color Code: Red	6-8	.31	.29	.78	1.00	YAE18Z3		YAE18Z3M	DFM10D1	
YAE18Z4 BOX		8-10	.36	.34	.83	1.08	YAE18Z4		YAE18Z4M	Die	
YAE14Z2 BOX	16-14 Max. Insul.	4-6	.28	.26	.76	.90	YAE14Z2	N14HET-15, N10HET-9, Y10D, Y10-22	YAE14Z2M	TFM	13/16"
YAE14Z3 BOX	Dia. Accom.: (156)	6-8	.31	.29	.78	1.00	YAE14Z3		YAE14Z3M	with	
YAE14Z4 BOX	Color Code: Blue	8-10	.36	.34	.83	1.08	YAE14Z4		YAE14Z4M	DFM9D1 Die	
YAE12Z2 BOX	14-12 Max. Insul.	4-6	.28	.27	.90	1.04	YAE12Z2	MR833T-1, M8ND with N12HET-1, Y10D, Y10-22	YAE12Z2M	TFM	21/64"
YAE12Z3 BOX	Dia. Accom.: (180)	6-8	.31	.32	.96	1.16	YAE12Z3		YAE12Z3M	with	
YAE12Z4 BOX	Color Code: Green	8-10	.36	.35	1.00	1.23	YAE12Z4		YAE12Z4M	DFM7D1 Die	

• Not UL recognized.