MICRO SWITCH
A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
FREEPORT, ILLINOIS
FED. MFR. CODE 91929

ASSEMBLY — TOGGLE SWITCH

CATALOG LISTING
23AT8

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

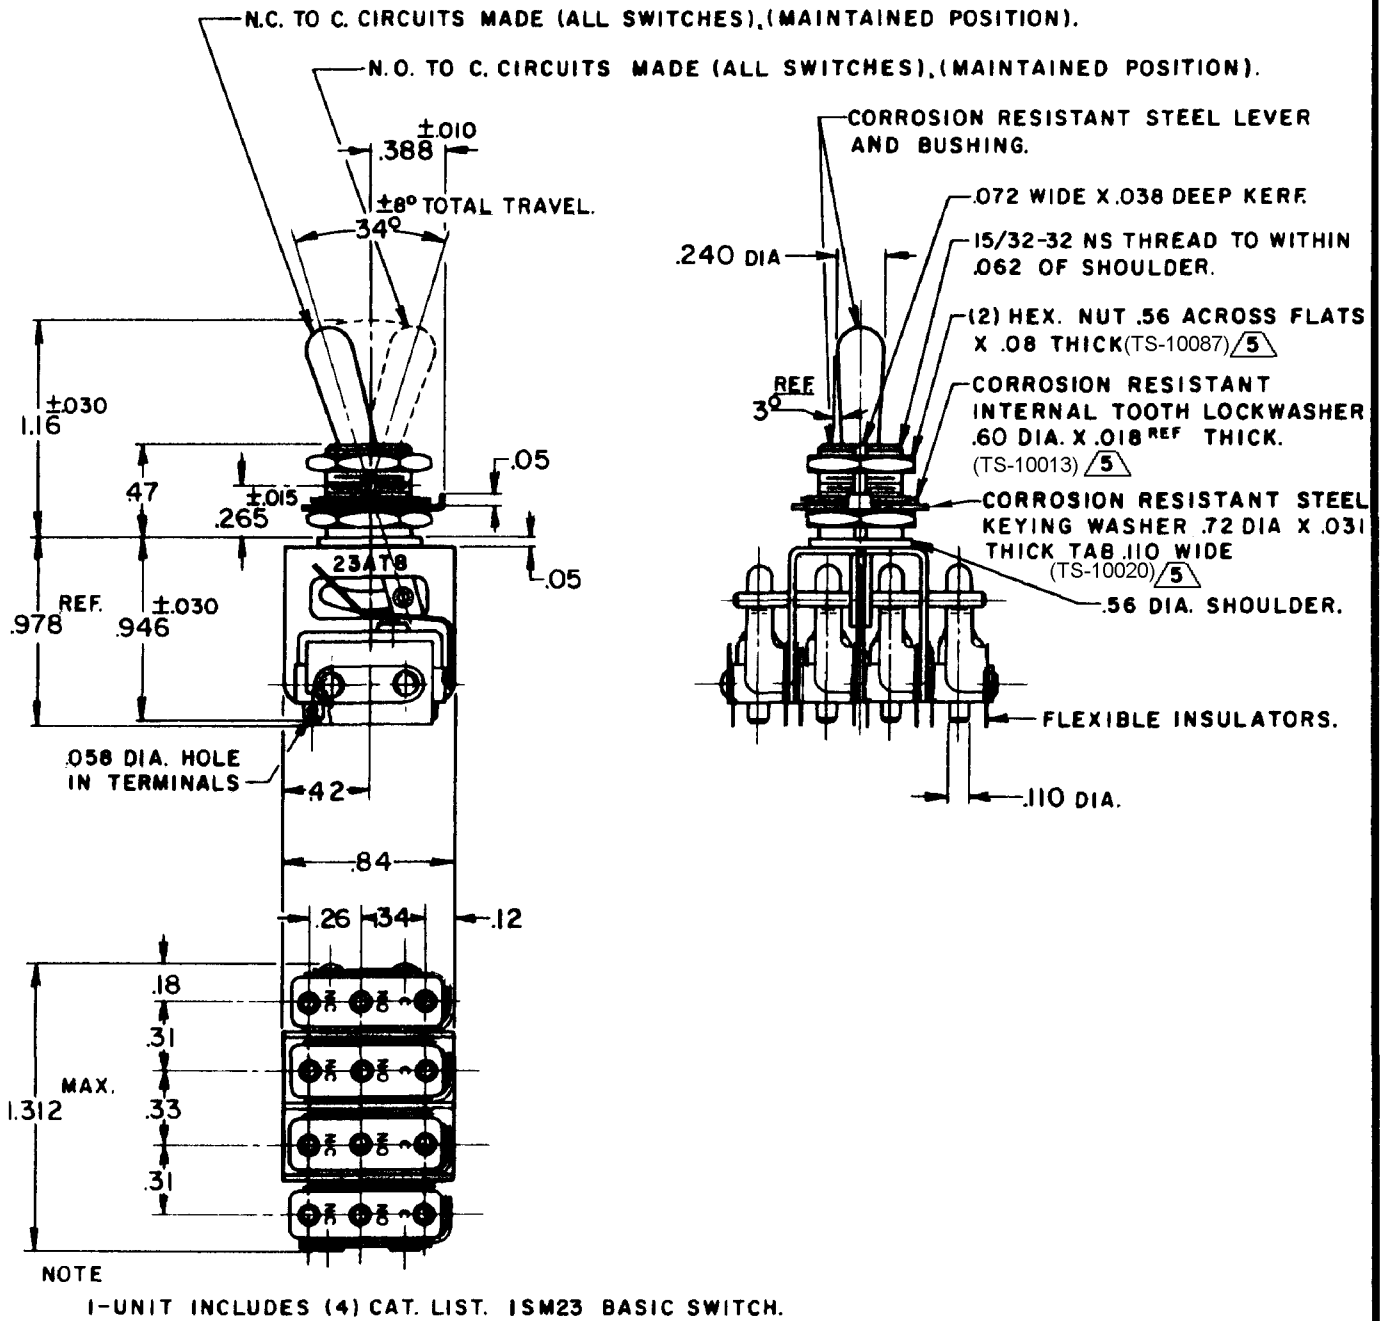

NOTE

1-UNIT INCLUDES (4) CAT. LIST. ISM23 BASIC SWITCH.
2-SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY.
3-TERMINALS ARE PLATED FOR SOLDERING.
4-BASIC SWITCHES HAVE 24K SOLID GOLD CONTACTS.
5 HARDWARE FURNISHED ASSEMBLED WITH SWITCH OR IN PACKET 15PA312-AT PER MIL-PRF-8805
6 - REPLACEMENT MOUNTING HARDWARE PACKET 15PA312-AT

CHARACTERISTICS

ELECTRICAL DATA

CONTACT ARRANGEMENT	BREAK DISTANCE
(4) S.P.D.T.	.010 MIN.

30 VOLTS DC RATING

INDUCTIVE	SEA LEVEL	1/2 AMP
	50,000 FT	1/2 AMP
RESISTIVE	SEA LEVEL	1 AMP
	50,000 FT.	1 AMP
MAXIMUM INRUSH		2 AMPS

SCALE FULL
DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE.

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.008
ANGLES		±

WEIGHT

SKETCH 18147
ISSUE 1
REPLACES
RELEASE NO. SR-7493
23AT8
PAGE 1 OF 1
M
DRAWING NUMBER
6
ISSUE

REVISIONS

A	CO 50566-B	6 WJM MAY 82
B	CO 66089	5 DAW FEB 91
C	203820	S A V 31 AUG 01
D	204763	GJW 24 JAN 02
E	205663	GJW 10 JUN 02

CHECK 30 APR 58 WRD CHECK 30 APR 58 G.C.H. CHECK 25, APRIL '58 DRAWN K.L.B.

RASTER
FO-50378